




US Army Corps
of Engineers ®

PDC TR-06-02 Rev 1
September 2008

U.S. ARMY CORPS OF ENGINEERS PROTECTIVE DESIGN CENTER TECHNICAL REPORT

User's Guide for the Single-Degree-of-Freedom Blast Effects Design Spreadsheets (SBEDS)

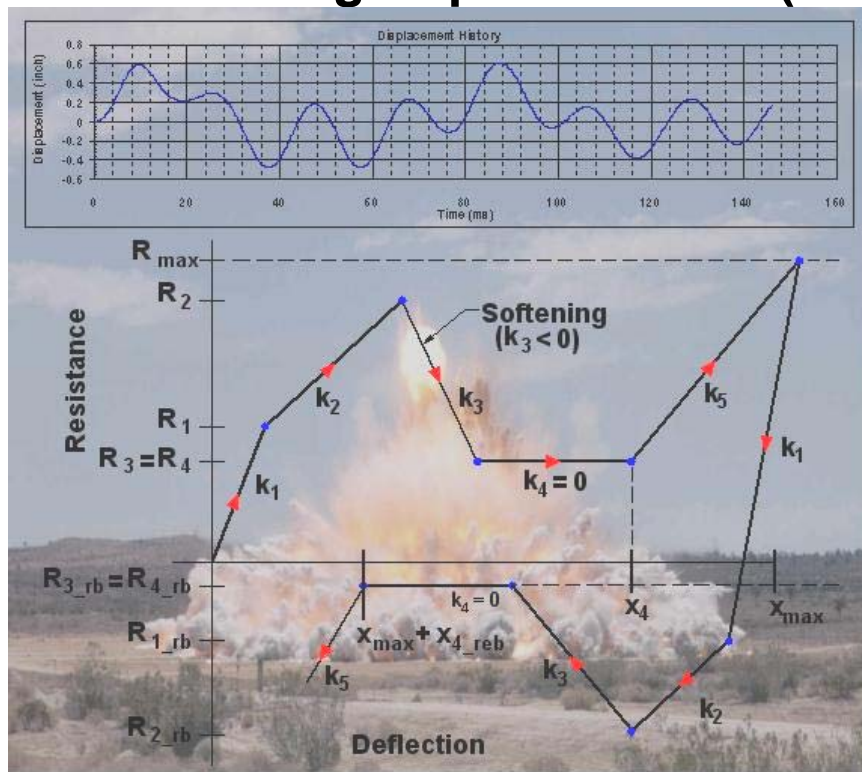


DISTRIBUTION STATEMENT A: Approved for Public Release;
Distribution is unlimited.

This page intentionally blank

SBEDS User's Guide Document

- 1) See ***Instructions*** on the bottom of the Introduction sheet in the SBEDS workbook for general help on using the workbook. See detailed information on SBEDS Methodology Report appended to the end of initial Help section of this document
- 2) Click on the applicable hyperlink from the list below for specific help with input items.
 - [***General Input and Output Items \(including solution control, design criteria, and dynamic shear factors, and results summary\)***](#)
 - [***Charge Weight-Standoff Blast Load Input Items***](#)
 - [***One Way Corrugated Panel***](#)
 - [***One-Way or Two-Way Steel Plate***](#)
 - [***Steel Beam or Beam-Column***](#)
 - [***Metal Stud Wall***](#)
 - [***Open-Web Steel Joist***](#)
 - [***One-Way or Two-Way Reinforced Concrete Slab***](#)
 - [***Reinforced Concrete Beam or Beam-Column***](#)
 - [***Prestressed Concrete Beam or Slab***](#)
 - [***One-Way or Two-Way Reinforced Masonry***](#)
 - [***One-Way or Two-Way Unreinforced Masonry***](#)
 - [***Wood Beam or Beam-Column***](#)
 - [***One-Way or Two-Way Wood Panel***](#)
 - [***General SDOF Analysis***](#)
 - [***Pressure-Impulse \(P-i\) and Standoff-Charge Weight \(R-W\) Diagrams***](#)
 - [***SBEDS Methodology Report***](#)
- 3) Click the SBEDS.xls application button at bottom of computer screen to return to EXCEL and continue input into SBEDS



Explanation of General Input and Output Items Including Blast Loads

| Item | Explanation |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blast Load Input Type | <ul style="list-style-type: none"> • <u>Manual blast load</u> is input with a maximum of 8 time-pressure pairs on the input form below the Blast Load Input pulldown menu. • <u>Charge Weight and Standoff</u> input is described in Table 3. • <u>Pressure-time history file</u> prompts user to select an input text file with an optional first line with number of time-pressure pairs followed by lines with one time-pressure pair separated by commas. This option will read a DPLOTT file saved using the ASCII file option. If the initial time in file is not zero, it is subtracted from all times to get $t(0)=0$. See Appendix A for an example file. Note: <i>The user designated file must have correct units (see below). User should change units on pressure history plot in DPLOTT before saving to get required units below by using Edit/Operate on X and Edit/Operate on Y.</i> • Note: <u>Time Units</u> are milliseconds, <u>Pressure Units</u> are psi (English), kPa (Metric) |
| Gravity Displacement | <ul style="list-style-type: none"> • <u>None (vertical component)</u> the component is perpendicular to the ground, there is no component initial deflection or resistance from gravity effects. • <u>In Direction of Blast Load</u> the component is parallel to the ground surface and deflects under gravity in the same direction as the initial applied blast load. SDOF calculations include an initial positive deflection and resistance from gravity effects based on the component self-weight and supported weight. • <u>Opposite Blast Load Direction</u> the component is parallel to the ground surface and deflects under gravity in opposite direction as the initial applied blast load. SDOF calculations include an initial negative deflection and resistance from gravity effects based on the component self-weight and supported weight. • Note: The input component self-weight and supported weight must not cause any yielding for gravity displacement in direction of blast load or in opposite direction |
| Dynamic Shear Factors | <ul style="list-style-type: none"> • <u>F</u> and <u>R</u> are the factors applied to the blast pressure and component resistance, respectively, at each time step using Equation 11-26 in UFC 3-340-01 to determine the dynamic shear pressure history at a given support. These factors are a function of the boundary conditions, load distribution, and deflected shape function. The dynamic shear pressure history must be multiplied by the full component blast loaded area to get the total shear reaction load along the support. • F and R factors are provided in SBEDS based primarily on Chapter 11 in UFC 3-340-01. See Section 4.3.1 of SBEDS Methodology Manual for additional information. • F and R factors for elastic response are used at time steps when the resistance is less than the ultimate flexural resistance for inbound and rebound response. Otherwise, F and R factors for plastic response are used. |
| % of Critical Damping | <p>The input percentage of critical damping is multiplied by the critical damping constant to determine the damping constant used in the SDOF calculations at each time step. See Table 4 for more information on damping, which is intended for response that is primarily elastic. Damping is calculated in SBEDS as recommended in UFC 3-340-01, where the damping constant is nonzero based on user input for time steps when the resistance is less than the ultimate flexural resistance during inbound and rebound response. Otherwise, the damping constant is set to 0.05%. Even when the user inputs 0% damping, SBEDS uses this very low value of damping because there is always at least a minimal amount of damping present in a real system and a very small amount of damping makes the numerical solution to determine maximum response of the SDOF system slightly more stable.</p> |

| Item | Explanation |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Time Step | <p>The input time step should typically be equal to the recommended time step, shown above the time step input space. The recommended time step is the smallest value based on the following criteria.</p> <ul style="list-style-type: none"> • 10% of the natural period • 10% of the smallest time increment in a manually input blast load • 3% of the equivalent triangular positive phase duration or 1.5% of the equivalent triangular negative phase duration of an input charge weight-standoff blast load • 3% of the smallest calculated time between local maxima and minima points of a input blast load file • The total 2900 time steps in the time-stepping SDOF method in SBEDS divided by 8 natural periods (but not less than 0.01 ms) <p>Note 1: The accuracy of the solution tends to increase as the time step decreases. If the time step can be changed by a factor of 2 or 3 and virtually the same answer is achieved, then the user can be confident that the result is not influenced by the time step. The spreadsheet solution may become unstable if the time step is much greater than the first two bulleted items above or 10% of the blast load positive or negative phase duration. A smaller time step (i.e. 3%) is recommended above for cases with blast loads that can have an exponential decay to increase accuracy.</p> <p>Note 2: If the time step is too small, dynamic response will not be calculated all the way out to peak deflection. The spreadsheet is programmed to give a warning message if peak deflection is not calculated, but the user should always review the displacement vs. time plot. If peak deflection is not calculated, increase the time step as much as possible without significantly exceeding the first four bulleted items above. The use of an initial velocity in place of an input blast pressure history (or in place of a short duration “spike” within the history) may also be appropriate, see next item.</p> |
| Initial Velocity | <p>The input initial velocity is applied as an initial condition in the SDOF equation of motion. This may be useful when the blast load duration is less than one-third of the natural period and a time step that is small enough compared to the blast load duration is too small to capture peak displacement. In this case, an initial velocity $v_0=i/(mK_{im})$ may be used in place of the blast load, where i = blast load impulse, K_{im} = initial load-mass factor, and m=mass. A time step equal to 10% of the natural period can be used if the only input load is an initial velocity.</p> |
| Response Criteria | <ul style="list-style-type: none"> • $\underline{\theta}$ and $\underline{\mu}$ are input maximum allowable design support rotation and ductility ratio, respectively, for the input component. They are compared to the calculated θ and μ values from the SDOF analysis in the Results Summary. • Recommended values for θ and μ based on selected component sub-category and LOP/Type from the two drop-down boxes under Response Criteria are provided by SBEDS based on values in the Response_Limits.xls file, which is maintained by the Protective Design Center at the U.S. Army Corps of Engineers, Omaha District (PDC). This file is based on PDC-TR 06-08 Rev 1 distributed with SBEDS by the PDC. The response limits are primarily applicable for Antiterrorism/Force Protection in the DoD. The LOP/Type refers to the desired Level of Protection (LOP) for the building containing the input component and the Type (i.e., Primary or Secondary/NS) of the input component. Primary framing components are Primary. Cladding and secondary framing components (i.e., girts and purlins) are Secondary. • Alternative design values for θ and μ are found in other blast design documents, including TM 5-1300 and “Design of Blast Resistant Buildings in Petrochemical Facilities” from ASCE. The user may select the “User Defined” option in the first component sub-category drop-down box under Response Criteria and then directly enter any desired θ and μ design values for the input component. If the user selects “User Defined”, the LOP/Type is not used. SBEDS has no response |

| Item | Explanation |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | criteria applicable for shear controlled response. |
| SDOF Calculations | SDOF calculations are performed using a constant velocity numerical integration scheme as generally recommended in "Introduction to Structural Dynamics" by J.M. Biggs (1964). Based on numerous trials, this simple method is stable and accurate for a wide variety of resistance-deflection cases provided the time step is small enough, which is typically possible with the 2900 time steps in SBEDS. The stiffness and resistance at each time step are determined as described in Table 1 and Figure 2 and Figure 3. |
| X_{max} Inbound and X_{min} Rebound | The maximum calculated inbound displacement and the maximum calculated negative rebound displacement. Inbound response is in the direction of positive blast load. If no negative rebound deflection is calculated, $X_{min} = 0$. |
| θ_{max} and μ in Results Summary | <ul style="list-style-type: none"> • θ_{max} is the maximum support rotation based on larger of X_{max} Inbound or X_{min} Rebound divided by the shortest calculated distance from a support to point of maximum deflection. • μ is the ductility ratio based on the larger of X_{max} Inbound divided by the elastic yield deflection or X_{min} Rebound divided by the elastic rebound yield deflection. The equivalent elastic yield deflections, x_E, is used to determine μ for indeterminate component (see Figure 1). <p>Note: μ is always expressed as a positive value, θ_{max} is negative when maximum rebound displacement is larger than maximum inbound displacement.</p> |
| R_{max} and R_{min} | Maximum resistance during inbound response and maximum negative resistance during rebound. Inbound response is in the direction of positive blast load. |
| Dynamic Axial Load | The <i>Results</i> sheet shows the applied Dynamic Axial Load per Unit Width on the same plot as the applied blast load. This load, which is read from a save file, is applied axially over the blast-loaded width of the analyzed component to cause P-delta effects that are accounted for in the SDOF analysis as explained in Section 4.4 of the SBEDS Methodology Manual. Since this option is only available for component types typically used as load bearing components, it is discussed in sections for each applicable component type. |
| Peak Dynamic Reactions | The <i>Results</i> sheet shows the maximum calculated dynamic reaction pressures from Equation 11-26 in UFC 3-340-01 based on the Dynamic Shear Factors determined by SBEDS on the <i>Input</i> sheet. These pressures can be multiplied by the component span length to get the peak dynamic reaction load per unit width along the support. |
| Strain-Rate to First Yield | The <i>Results</i> sheet shows the calculated strain-rate, equal to the dynamic yield strain (i.e. dynamic yield stress divided by elastic modulus or 0.002 in/in for concrete and masonry) divided by the time to yield (when inbound deflection = x_e for determinant and x_E for indeterminate components in Figure 1). If no yield occurs, the maximum strain is divided by the time to maximum response assuming strain increases linearly with resistance up to first yield. Separate strain rates are calculated for reinforcing steel and concrete/masonry in reinforced concrete/masonry components. Note: No strain-rate is output for Open Web Steel Joists. |
| SDOF Output Response Histories | The <i>SDOF Output</i> sheet in the SBEDS workbook has all a full suite of calculated response histories, the applied blast load history, and the equivalent calculated load history representing P-delta effects. All of these response and load histories can be saved to a DPLLOT file with a SAVE button on this sheet. |
| Dynamic Reactions on Supporting Components | The <i>SDOF Output</i> sheet in the SBEDS workbook has SAVE file buttons to save the calculated dynamic reaction pressure histories to files that can be read as Pressure-Time file loads into a subsequent SBEDS analysis of a supporting member. They act over the full loaded area of the component. The saved dynamic reaction pressure histories are multiplied by 2.0 to represent the dynamic reaction pressure load acting over the tributary area of a supporting component, except for components with a cantilever boundary condition. See Section 3.5 of the SBEDS Methodology Manual for additional explanation. |

| Item | Explanation |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SAVE and RETRIEVE click buttons | Use SAVE button to save user input for any component type into a user designated text format save file using the pop-up browser feature. The save file information can be read back into SBEDS using the RETRIEVE button on the Input sheets. A saved file with any component type or units can be retrieved from an Input sheet for any component type. A component type that is either the same or different from the component type on the current Input sheet can be retrieved. |

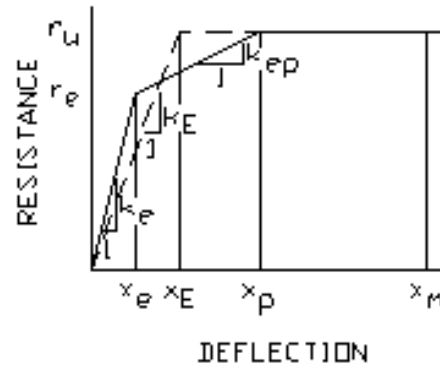


Figure 1. Resistance-Deflection Curve Showing Equivalent Elastic Deflection (x_e)

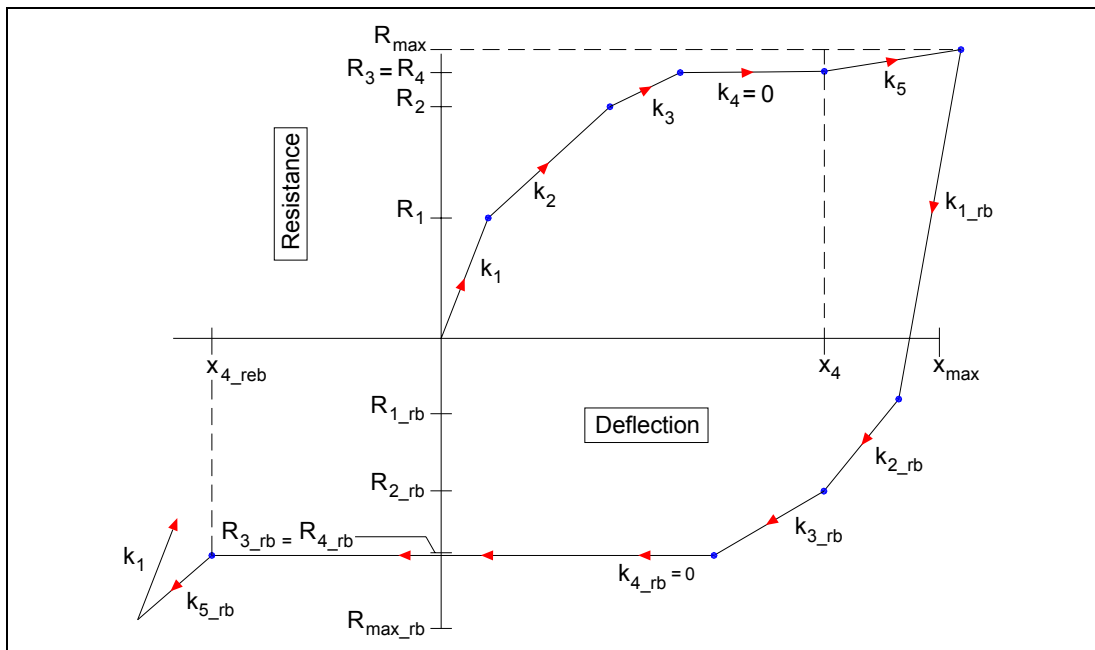


Figure 2. General Resistance-Deflection Diagram Without Softening

Note: k_i are input stiffness for stiffness regions $i = 1$ to 5
 k_{i_rb} are input stiffness for stiffness regions $i = 1$ to 5
 R_i are input inbound resistances for stiffness regions $i = 1$ to 5 : $r_i \geq 0$
 R_{i_rb} are input rebound resistances for stiffness regions $i = 1$ to 5 : $r_{i_rb} \leq 0$
 x_i are input inbound maximum deflections for stiffness regions $i = 1$ to 5 : $x_i \geq 0$
 x_{i_rb} are input rebound maximum deflections for stiffness regions $i = 1$ to 5 : $x_{i_rb} \leq 0$
 x_i is only used if $k_i = 0$ and $k_{i+1} \neq 0$ and x_{i_rb} is only used if $k_{i_rb} = 0$ and $k_{i+1_rb} \neq 0$ (see Table 1)

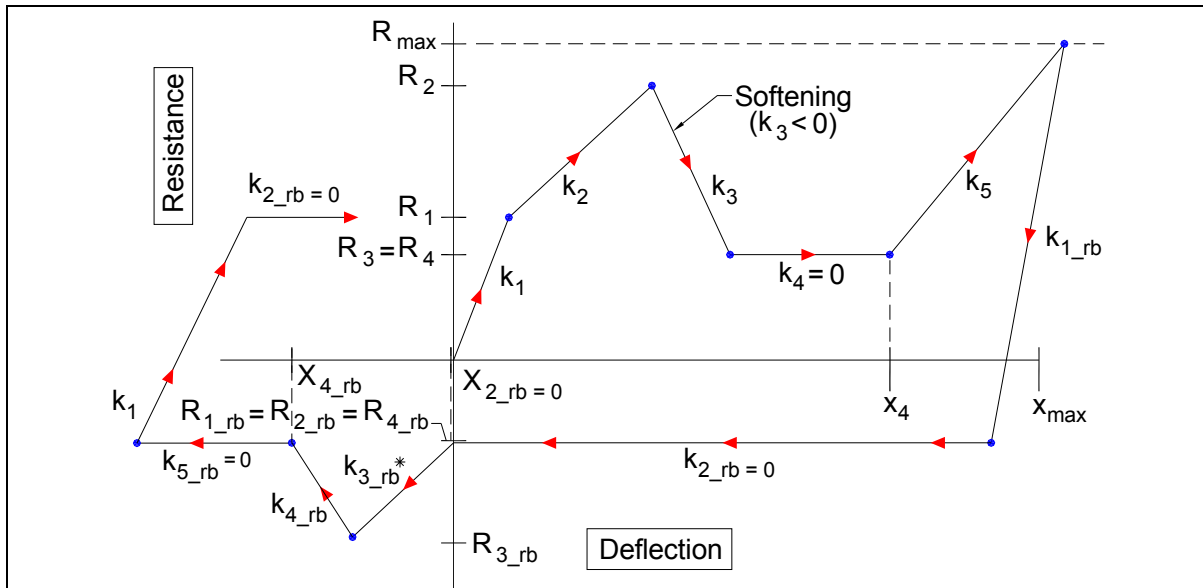


Figure 3. Typical Resistance-Deflection Diagram With Softening (See Figure 2 and Table 1 for Definition of Terms in Figure)

Table 1. Definition of Terms for Stiffness Region Criteria Tables

| Parameter | Definition |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| R_i where $i=1..4$ | Inbound yield resistance for i^{th} stiffness region ($R_i \geq 0$) |
| R_{i_rb} where $i=1..4$ | Rebound yield resistance for i^{th} stiffness region ($R_{i_rb} \leq 0$) |
| R_{max} | Maximum resistance from previous cycle |
| k_i | Stiffness value for i^{th} stiffness region in inbound response |
| k_{i_rb} | Stiffness value for i^{th} stiffness region in rebound. |
| x_i and x_{i_reb} | Yield displacements for i^{th} stiffness region in inbound and rebound. SBEDS uses these values as a basis for changing stiffness region when the current stiffness equals zero. Otherwise, SBEDS compares the resistance at the current time step to the yield resistance for the current stiffness region to change stiffness regions, see Table 2 for more information. |

Table 2. Criteria for Determining To Stay in Current Stiffness Region During Dynamic Response

| Case | Criteria for Staying in i^{th} Region ^{1,2} |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response in i^{th} region for components with no softening (i.e., no negative stiffnesses) ³ | SBEDS stays in current i^{th} stiffness region for $k_i > 0$ when $R < R_i$ during inbound and $R > R_{i_rb}$ during rebound and for $k_i < 0$ when $R > R_i$ during inbound and $R < R_{i_rb}$ during rebound. See next case of $k_i = 0$ in row below. |
| Response in i^{th} inbound region when $k_i = 0$ | SBEDS stays in current i^{th} stiffness region for $x < x_i$ (for perfectly plastic response where $k_i = 0$ for all i greater than the current i this criteria is not necessary) |
| Response in i^{th} rebound region when $k_{i_rb} = 0$ and $k_{i+1_rb} \neq 0$ | SBEDS stays in current i^{th} stiffness region for $x > x_{i_rb}$ |
| Response in i^{th} region for components with softening | Same as all three cases above for first inbound response. Then, SBEDS stays in current i^{th} stiffness region when $R < -R_{i_rb}$ during inbound and $R > R_{i_rb}$ during rebound ⁴ (i.e., input rebound resistances and stiffnesses are used for inbound response after first inbound cycle – see discussion in paragraphs below) |
| Response in i^{th} region for unreinforced masonry with brittle flexural response mode | Same as softening case above if cracking (i.e., softening) has occurred. Otherwise, SBEDS stays in current i^{th} stiffness region when $R > -R_i$ during rebound $R < R_i$ during inbound prior to cracking ⁴ (i.e., input inbound resistances and stiffnesses are also used for rebound response prior to cracking– see discussion in paragraphs below) |
| <p>Note 1: If velocity changes sign, stiffness is changed to input k_1 value for opposite response direction</p> <p>Note 2: When criteria for staying in region is not met, stiffness is changed to the input stiffness value for next highest region. When $i=5$, the stiffness is only changed by rebound (i.e., velocity sign change).</p> <p>Note 3: Not applicable for unreinforced masonry with brittle flexural response mode</p> <p>Note 4: See discussion below regarding components with softening including special case of unreinforced masonry with brittle flexural response.</p> | |

The rules used to transition between stiffness regions were set up to cover the most common situations for the component types and response types in SBEDS, including special rules for components with softening in the input resistance-deflection curve and for unreinforced masonry components with brittle flexural response mode and arching from axial load. The basic approach for components without input softening in the resistance-deflection curve is illustrated in Figure 2 and described in the first three rows of Table 2. These rules also apply during the first inbound response for components with input softening in the resistance-deflection curve. Softening, which is shown in Figure 3, is assumed to imply that the input component has compression membrane response or is an unreinforced masonry components with brittle flexural response and arching from axial load.

For the case of a component with compression membrane response, SBEDS automatically arranges the rebound resistance-deflection curve to prohibit compression membrane during rebound until the deflection is less than zero, since this response mode depends on the location of the midspan deflection relative to the supports. It is arguable if previously crushed material can still provide the same stiffness during subsequent response cycles, but SBEDS simplistically assumes no change in stiffness

(i.e., degradation) due to multiple response cycles. SBEDS uses the rebound stiffnesses and the negative of the rebound resistances for all inbound cycles after the first inbound cycle. This prohibits compression membrane during subsequent inbound cycles unless the deflection is greater than zero. This would not occur if the inbound values for resistance and stiffness were used for subsequent inbound cycles.

An unreinforced masonry component with a brittle flexural response mode and arching from axial load has an input resistance-deflection similar to Figure 3 except that the peak resistance is due to flexural response rather than compression membrane. Softening implies brittle cracking and a loss of all flexural strength for any subsequent rebound and inbound cycles. However, rebound flexural response can occur if there has not been cracking. SBEDS automatically arranges the rebound resistance-deflection curve for an unreinforced masonry component that has a brittle flexural response mode and arching from axial load assuming cracking has occurred during the first inbound response, so that no flexural stiffness is included during rebound. This assumption is applicable during rebound only if cracking occurs during inbound response and it is also applicable to all subsequent inbound response cycles after cracking has occurred. Therefore, the case for softening described above, where the rebound stiffness and resistance are used for inbound response, is applicable for all cycles after cracking. Prior to cracking, SBEDS uses the inbound resistances and stiffnesses for rebound because they are applicable for both inbound and rebound response prior to cracking.

These rules are hard-coded into SBEDS. The rules for an unreinforced masonry component with brittle flexural response mode and arching from axial load are only applied by SBEDS to the SDOF response calculations when this component and response type are selected by the user. The rules for softening are applied for any other case with softening in the calculated response. These rules can be controlled by the user when using the General SDOF Analysis input template. Go back to the top of this document to link with specific help for this component type.

Table 3. Explanation of Charge Weight-Standoff Blast Load Calculations

| Item | Explanation |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General | <ul style="list-style-type: none"> All blast loads are calculated assuming a hemispherical surface burst. If the blast load includes significant reflections off surrounding buildings, or is otherwise not a typical exponentially decaying blast load, use Manual input or input a representative Pressure-Time history from a saved file. The negative phase blast load is not understood as well as the positive phase blast load, especially for sides of the building not facing the explosive charge. Users should be cautious about including the negative phase of the blast load if it significantly reduces calculated component response. |
| Charge Weight | Input the equivalent TNT charge weight in the designated units shown on the input form. See UFC 3-340-01 and TM 5-1300 for a list of equivalent TNT factors for other explosive types. |
| Standoff | Input distance from the center of the explosive charge to the center of the blast-loaded component in the designated units shown on the input form. It is typically more accurate to use the longer "line of sight" distance around building corners for components not facing the explosive charge, rather than a straight-line distance through a building. However, it is conservative to use the straight-line distance. The blast load on sides of the building not facing towards the charge can also be calculated separately from SBEDS using methods in blast analysis manuals such as UFC 3-340-01, TM 5-1300, and ASCE "Design of Blast Resistant Buildings in Petrochemical Facilities" and input using the Manual Blast Load input. |
| Charge Weight Load Type | <ul style="list-style-type: none"> The charge weight load type is based on the angle of incidence, α, of the blast wave front relative to the side of the building with the input component. See Figure 5 for an illustration of α. Reflected blast load should be used for components on sides of the building facing, or partially facing the explosive charge. For these cases, $0 \leq \alpha < 90$. <u>Reflected blast load with clearing</u> should be used to get a less conservative blast load that takes into account relief waves that propagate across sides of the building with reflected blast loads and cause a reduction in blast load if the positive phase blast load duration is shorter than the time required for the relief wave to propagate across the building face with the input component. <u>Reflected blast load without clearing</u> can always be used to calculate a more conservative blast load and for cases where the positive phase blast load duration is longer than the time required for the relief waves to propagate across the building face with the input component. The SBEDS program will automatically ignore clearing for the latter case, even if the user inputs a "Reflected blast load with clearing". <u>Side-on</u> blast load should be used for components not facing the explosive charge, including flat roofs. For these cases, $\alpha \geq 90$. |
| Blast Load Phase | <ul style="list-style-type: none"> <u>Positive and negative phase</u> blast load causes both the calculated positive and negative phase blast loads to be applied in the SDOF calculations. <u>Positive phase only</u> blast load causes only the calculated positive phase blast load to be applied in the SDOF response calculations. |
| Parameters for Reflected Walls | <ul style="list-style-type: none"> These values should only be input if the "Reflected blast load with clearing" option is selected in the "Charge Weight Load Type" dropdown menu box. Input the height and width of the building wall containing the input component. Input the angle of incidence of blast wave relative to building wall |

| | |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>containing input component, α. See Figure 5. The input for α should be $0 \leq \alpha < 90$, since if $\alpha \geq 90$, then a "Side-on" blast load should be selected for "Charge Weight Load Type". It is always conservative to use an angle of incidence equal to zero, which causes a fully reflected blast load.</p> |
| <p>Positive Phase Blast Load Calculations</p> | <ul style="list-style-type: none"> • The positive phase peak pressure and impulse for all side-on blast loads are calculated from the scaled curves in Fig. 5-6 of UFC 3-340-01. • The positive phase peak pressures for all reflected blast loads are calculated using the input angle of incidence, α, the peak side-on pressure, and reflection factors $C_{r\alpha}$ in Fig. 5-3 of UFC 3-340-01. • The positive phase impulses for all reflected blast loads without clearing are calculated using the input angle of incidence, α, the peak side-on pressure, and scaled reflected impulse factors from Fig. 2-194 in TM 5-1300 with some minor adjustments to cause fully reflected impulses from this graph to match those from Fig. 5-6 of UFC 3-340-01. • The positive phase impulses for all reflected blast loads with clearing are calculated from the input building wall dimensions based on Section 9.3.3 and Eq. 9-11 in UFC 3-340-01. The peak pressure for these cases is calculated considering the input angle of incidence, α. • The shape of the positive phase blast load is based on the exponential decay coefficient from the CONWEP computer program for all cases except reflected blast loads with clearing, where the shape is linear based on Section 9.3.3 of UFC 3-340-01. • SBEDS calculates the pressures at 1000 evenly spaced time interval points within the positive blast load duration. The pressures at each time step in the SDOF calculations are interpolated between time interval points. |
| <p>Negative Phase Blast Load Calculations</p> | <ul style="list-style-type: none"> • The negative phase peak pressure and impulse of side-on blast loads and fully reflected blast loads are calculated from curve-fits to scaled curves in Fig. 5-6 and 5-7 of UFC 3-340-01. The shape of the negative blast pressure history is shown in Figure 4 from page 2.08-20 of the "Blast Resistant Structures, Design Manual 2.08, December 1986" from the U.S. Navy. This shape is used for both reflected and side-on loads, subject to the modification factors C_p^- in Equation 1. • The peak pressure and impulse of the negative phase are based on fully reflected values if the input angle of incidence, α, is less than 45 degrees. Otherwise, it is based on side-on values. • There is no available methodology for calculating clearing effects on negative blast loads. The peak pressure and impulse of the negative phase is not affected by clearing, even when the user selected "Reflected blast loads with clearing", except when the clearing time occurs prior to the peak negative phase blast load estimated to occur at one quarter of the negative phase blast load duration. In this case, the side-on negative phase blast load is used because it is assumed that the blast load is fully cleared during all or most of the negative phase blast loading. • SBEDS calculates the pressures at 1000 evenly spaced time interval points within the negative blast load duration. The pressures at each time step in the SDOF calculations are interpolated between time interval points. |

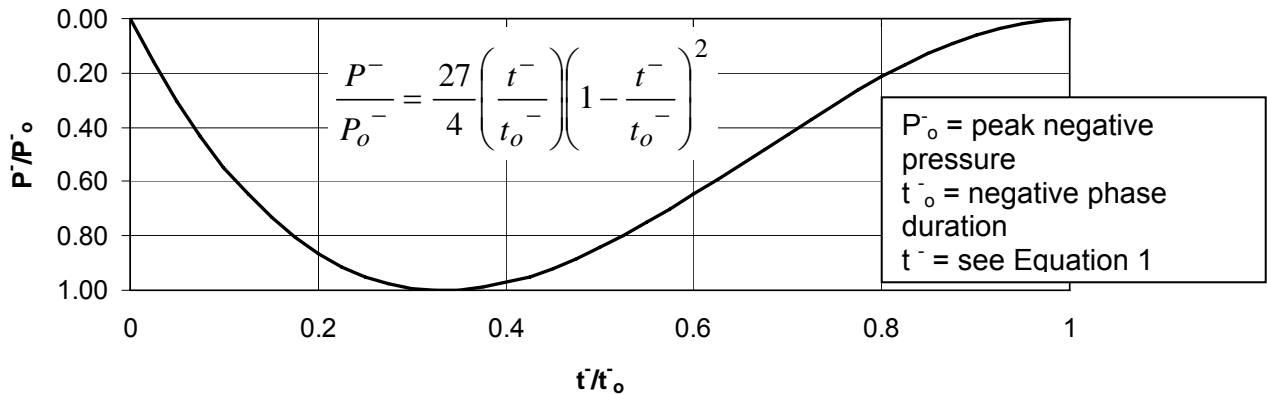


Figure 4. Pressure History Shape Used in SBEDS for Blast Load from Input Charge Weight and Standoff

$$t^- = t'^- * Cp^-$$

$$Cp^- = \frac{i^-}{i'^-}$$

Equation 1

where:

- t'^- = time since first negative pressure
- t^- = corrected time since first negative pressure used in SBEDS calculations
- i'^- = impulse calculated with equation for negative pressure history in Figure 4
- i^- = actual negative phase impulse from UFC 3-340-01 charts

Note: Negative phase times (time after first negative pressure) are modified to cause impulse of approximate blast history shape in Figure 4 to match actual negative phase impulse. Typically t'^- is modified by less than 10%.

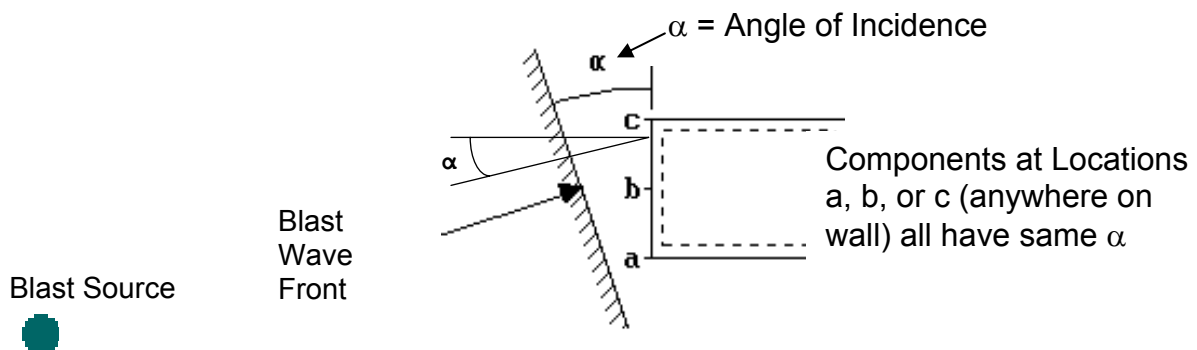


Figure 5. Plan View Showing Angle of Incidence of Shock Front Relative to Building Wall

Table 4. Damping Factor Information For Primarily Elastic Dynamic Response

| Structure | Structural Damping Ratio |
|------------------------------------------------|--------------------------|
| Welded Steel, Fixed-End, No Attachments | 0.0001 to 0.001 |
| Welded Steel, Fixed-End, Attachments | 0.01 to 0.03 |
| Welded Steel, Simple Support, Support Friction | 0.01 to 0.03 |
| Bolted Steel | 0.04 to 0.07 |
| Reinforced Concrete, Lightly Cracked | 0.02 to 0.05 |
| Reinforced Concrete, Heavily Cracked | 0.05 to 0.15 |

Note: Multiply above Structural Damping Ratio values by 100 to get “% of Critical Damping” values for SBEDS input.

Input of Steel Components

| Item | Explanation |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flexural Response | <ul style="list-style-type: none"> Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 6. Load-mass, stiffness, and ultimate flexural resistance values for all one-way and two-way components are based on Chapter 3, TM 5-1300, except as below. The elastic resistances for two-way components with fixed supports are based on Table 10-5 in UFC 3-340-01. For components with adjacent fixed supports, the elastic resistance is based only on the negative moment capacity acting on the yield lines pattern for ultimate resistance. All ultimate resistances for two-way spanning components are calculated based on TM 5-1300 with a 1.08 increase factor to account for conservative approach in TM 5-1300 where only 2/3 maximum moment capacity is assumed in corners. |
| Flexural and Tension Membrane Response | <ul style="list-style-type: none"> This response mode should only be selected if the component has supports that prevent in-plane displacement as the component responds to blast load. The in-plane tension capacity of the component supports must be input as explained below in table. Response is based on yielding at the maximum moment regions (using K_E in Figure 6 for components with indeterminate boundary conditions) followed by linear tension membrane response as shown in Figure 7. K_E is based on Equation 3.34 in TM 5-1300 assuming equal positive and negative moment capacities for two-way spanning components with fixed supports. Tension membrane response calculations are approximate. A constant tension membrane stiffness based on the maximum tension in component is assumed to add to the flexural response at a deflection x_{TM}, as shown in Figure 7 and Equation 2. Previous calculations by BakerRisk for shock tube tests show this approximate method compares reasonably well to test data as shown in Figure 8, where predicted girt deflections were based on Figure 7 and Equation 2 for one-half scale shock tube tests on cold-formed steel girts. Conservatively, tension membrane response can be ignored. TM 5-1300 recommends that tension membrane be ignored for corrugated steel panels, where tension membrane is implicitly accounted for with higher allowable response limits for panels well connected to supports. <p>Note: When $K_{TM} > K_E$ in Figure 7, tension membrane stiffness exceeds flexural stiffness. The SDOF analysis will not correctly calculate rebound for this case and calculations are stopped at the maximum deflection. If rebound is critical, another methodology should be used to calculate response.</p> |
| Column Anchor Bolt Shear Response | <ul style="list-style-type: none"> Tests have shown the base plate bolts take load very quickly and the bolts will fail in shear before the column fails in flexure. Therefore, it is recommended that columns be embedded into the floor slab, if the column is not continuous into a basement. If this is not possible, the column should be analyzed with its ultimate resistance based on the anchor bolt shear capacity and have a maximum allowable ductility ratio of 1.0 to avoid failure (i.e. hazardous damage). This can be done using the General SDOF option on the Intro Sheet of SBEDS. |
| Supported Weight | <ul style="list-style-type: none"> Input the supported weight that moves through same deflection as component. This is equal to the total supported weight for panels and closely spaced beams (i.e. up to approximately 7 ft). Conservatively, 20% of the supported weight over total tributary area can be input for beams or columns at further spacing. |
| Loaded Area | <ul style="list-style-type: none"> Ratio of [blast loaded area on component] to [component spacing*span]. |

| Item | Explanation |
|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Factor, A_F | $A_F = 1$ for any uniformly distributed blast load, $A_F \leq 1$ for concentrated loads where attached components transfer load from area that does not include full span. See Figure 9 for example case where $A_F = 0.5$. Stiffness and resistance values are based on a blast loaded area = A_F BL. Mass calculations unaffected by A_F since supported mass per unit loaded area is input directly and the self-weight mass is independent of A_F . |
| Static Strength Increase Factor (SIF) | <ul style="list-style-type: none"> This is the ratio of the actual static yield strength to the minimum specified yield strength. Default input values in SBEDS are shown in Table 5. This can also be referred to as an average strength factor (ASF). |
| Dynamic Strength Increase Factor (DIF) | <ul style="list-style-type: none"> This is the ratio of the dynamic yield strength including strain-rate effects to the actual static yield strength. Default input values in Table 6 for "Low Pressure" are provided in SBEDS. See Chapter 4 in UFC 3-340-01 for more detailed information on DIF and strain-rate for steel. See "Results" sheet for strain-rate from SDOF calculations for input component. The "User Defined" material property may be used to input DIF and SIF values. |
| Moment Capacity | <ul style="list-style-type: none"> Moment capacity for corrugated panels is calculated as $0.9f_{dy} * S_{avg}$, where S_{avg} is the average of the section modulus for positive and negative moment regions. Moment capacity for steel plates is calculated as $f_{dy} * (S+Z)/2$. Moment capacity for cold-formed beams is calculated as $f_{dy} * S$, if well braced. Moment capacity for hot-rolled beams is calculated as $f_{dy} * Z$, if well braced. Moment capacity for beams not well braced and beam-columns is calculated using Equation 5-44, 5-45, and 5-47 in TM 5-1300 with $M_y=0$ and $C_m/(1-P/P_{ex})=1$, since there is no biaxial bending and second order P-delta effects are accounted for directly in SDOF calculations as described below. The compressive load includes the input static axial load and the peak dynamic axial load. These equations are consistent with interaction formulas for Plastic Design in the AISC Manual of Steel Construction. Equation 5-44 and 5-45 are set equal to 1.0 and solved for M_x. The lesser value of M_x is the "available" moment capacity and is used to calculate flexural resistances. Equation 5-47 accounts for the effect of the input unbraced length of the compression flange on M_x. |
| Inbound and Rebound Unbraced Length for Compression Flange, L_{br} | Distance between lateral brace points for the compression flange for inbound and rebound response used in Equation 5-47 from TM 5-1300. Note that the compression flange is opposite for inbound and rebound response. The damage caused by lateral torsional buckling of blast-loaded beams is not well understood and may be overestimated in SDOF calculations based on a long unbraced compression flange length. No lateral torsional buckling effects are included in moment capacity calculations in SBEDS for tube sections or beams responding in their weak axis. |
| Support capacity for tension membrane, V_c | <p>V_c is the maximum in-plane tension strength provided by the connection and supporting framing members to the input component. See Equation 2 for effect of V_c on tension membrane response.</p> <ul style="list-style-type: none"> Typically $V_c < f_{dy}A$ and therefore the support capacity controls maximum tension force in component. V_c can be based on the full capacity of the connection when the component bears against its support during blast load, otherwise some reduction can be made to account for out-of-plane shear forces on connection acting with in-plane tension. V_c can also be limited by the in-plane flexural strength of the framing component supporting the component of interest. |
| Static Axial Load | <ul style="list-style-type: none"> User should input static axial load P causing compression and P-delta |

| Item | Explanation |
|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>for Compression and P-delta Loading, P</p> <p>(Only for Beam-Columns)</p> | <p>moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on $(P/B+P_{DYN})^*$(deflection at each time step) assuming no resisting moment at the supports, at each time step in SDOF calculations. B is the beam/column spacing and P_{DYN} is explained in the next row. w_{equiv} is calculated as shown in Equation 3 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is an approximate approach, especially for two-way spans and one-way spans with fixed boundary conditions.</p> <ul style="list-style-type: none"> Do not input static or blast load from roof components if also inputting dynamic axial load. See Section 4.4 of SBEDS Methodology Manual for more info. <p>Note: See Table 7 for comparison of equivalent lateral load method in SBEDS to theory where elastic, essentially static lateral load was input in SBEDS with axial load.</p> |
| <p>Dynamic Axial Load for Compression and P-delta Loading, P_{DYN}</p> <p>(Only for Beam-Columns)</p> | <ul style="list-style-type: none"> <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with dynamic reaction load from a supported roof or overhead component. This file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. The last line of input file has -999 followed by a comma and the tributary span length, L_s of the component that applies the dynamic reaction pressure (see Equation 4). SBEDS determines P_{DYN} as shown in Equation 4 and uses it to determine an equivalent P-delta load as shown in Equation 3. See Appendix A for an example of an input dynamic axial load input file. <p>Note: The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file into SBEDS as a dynamic axial load input file on a supporting component.</p> |
| <p>Loaded Width for Dynamic Axial Load, B_a</p> | <ul style="list-style-type: none"> Only applicable for cases with input dynamic axial load Input width along top of component subject to dynamic axial load per unit width (see Equation 3). |
| <p>Assumed deflection at beginning of tension membrane response, x_{TM}</p> | <ul style="list-style-type: none"> See Equation 2 for calculation of x_{TM}. <u>Note that x_{TM} is not an input.</u> x_{TM} is equal to the theoretical deflection to achieve maximum tension force in component plus deflection to full flexural yielding. The additional deflection to yield approximately accounts for flexibility in the structure, oversized bolt holes, and other effects that allow some inward movement of supports. |
| <p>Peak Equivalent Static Reactions</p> | <ul style="list-style-type: none"> Equivalent static reactions on the <i>Input</i> sheet are based on formulas in Table 3-9 and Table 3-10 in TM 5-1300 using the larger of the ultimate flexural resistance for inbound or rebound. These reactions are treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on input Dynamic Shear Factors are shown on the <i>Results</i> sheet, but is not used to calculate Peak Equivalent Static Reactions. |
| <p>Shear Strength Calculations</p> | <ul style="list-style-type: none"> For hot-rolled beam and column sections (i.e. $t_{web} > 0.125$ inch), the shear strength is equal to $0.55f_{dy}$. |

| Item | Explanation |
|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <ul style="list-style-type: none"> For cold-formed beams and panels, the shear strength is calculated using Table 5-5 through 5-7 in TM 5-1300 accounting for shear buckling effects in the web. Equations for web buckling with combined shear and bending stresses are used for corrugated panels with a fixed boundary condition. The shear area of corrugated steel panels is equal to the web area based on two webs per rib and input rib spacing. The shear area of beams and columns is equal to the web area for strong axis response and equal to the full cross section area for weak axis response. The shear capacity (V_s) is compared to the maximum Peak Equivalent Static Reaction to determine if the shear capacity is sufficient (i.e., OK). |
| ReRunning SDOF with Resistance Controlled by Shear Capacity (Shear Flag) | <ul style="list-style-type: none"> If the shear capacity $V_s <$ Peak Equivalent Static Reactions, SBEDS provides a user option to recalculate dynamic response using R_{u_shear} from Equation 5 for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. The user must enter a value of 1 in the Shear Flag input cell created by SBEDS when $V_s <$ Peak Equivalent Static Reactions in order to rerun SBEDS with maximum resistances of R_{u_shear} where $R_i > R_{u_shear}$. Resistances based on tension membrane are not affected. The Error Message area on the Input Sheet provides directions for rerunning the SDOF analysis using R_{u_shear}. Note that the Peak Equivalent Static Reactions in SBEDS are based on the ultimate flexural resistance (R_u), not the maximum calculated resistance (R_{max}) from the SDOF analysis. If the shear flag is calculated for a case where $R_{max} < R_u$, the actual reactions might not exceed the shear strength. This case will be indicated by SBEDS in a message box. DoD design methods may require that the shear capacity $V_s \geq$ Peak Equivalent Static Reactions. In this case, redesign the component and do not use the shear flag. Use of the shear flag is generally recommended only for analysis of existing components where upgrading the shear capacity is not feasible. HOWEVER, SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response. |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

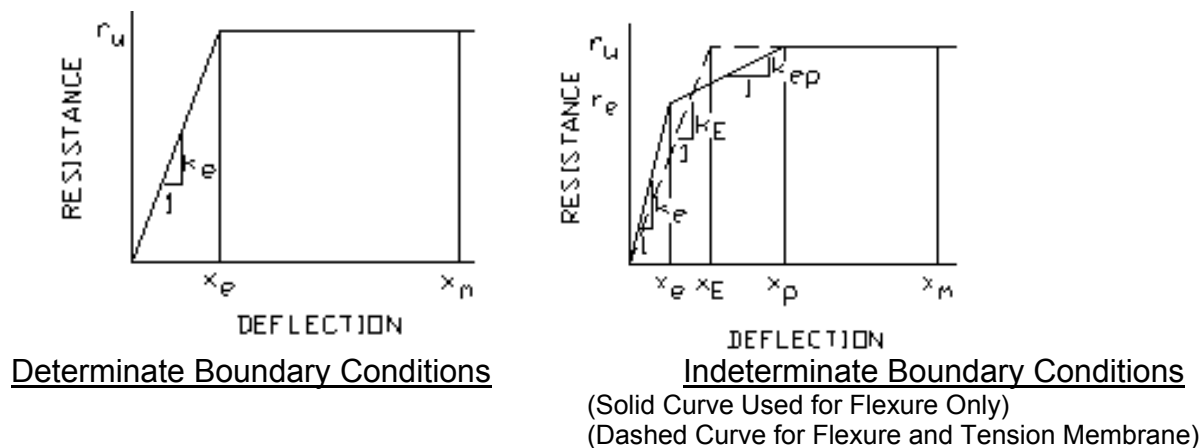


Figure 6. Resistance-Deflection Curve For Flexural Response

Table 5. Recommended Steel Static Increase Factors (SIF) in TM 5-1300

| Material | Minimum Yield Strength (psi) | Static Increase Factor* |
|----------|------------------------------|-------------------------|
| A36 | 36,000 | 1.1 |
| A588 | 50,000 | 1.05(Estimated) |
| A514 | 100,000 | 1.0 |

* Also referred to Average Strength Factor (ASF)

Table 6. Recommended Steel Dynamic Increase Factors (DIF) in TM 5-1300

| Material | Beam in Bending | | Beam in Tension or Compression | |
|-----------------------|-----------------|----------------|--------------------------------|----------------|
| | Low Pressure* | High Pressure* | Low Pressure* | High Pressure* |
| A36 ($f_y=36$ ksi) | 1.29 | 1.36 | 1.19 | 1.24 |
| A588 ($f_y=50$ ksi) | 1.19 | 1.24 | 1.12 | 1.15 |
| A514 ($f_y=100$ ksi) | 1.09 | 1.12 | 1.05 | 1.07 |

* Low pressure can be conservatively assumed in all cases. High pressure can be assumed when the scaled standoff $< 3 \text{ ft/lb}^{1/3}$. See Chapter 4 in UFC 3-340-01 for DIF information as a function of strain-rate.
**Estimated values interpolated based on yield strength.

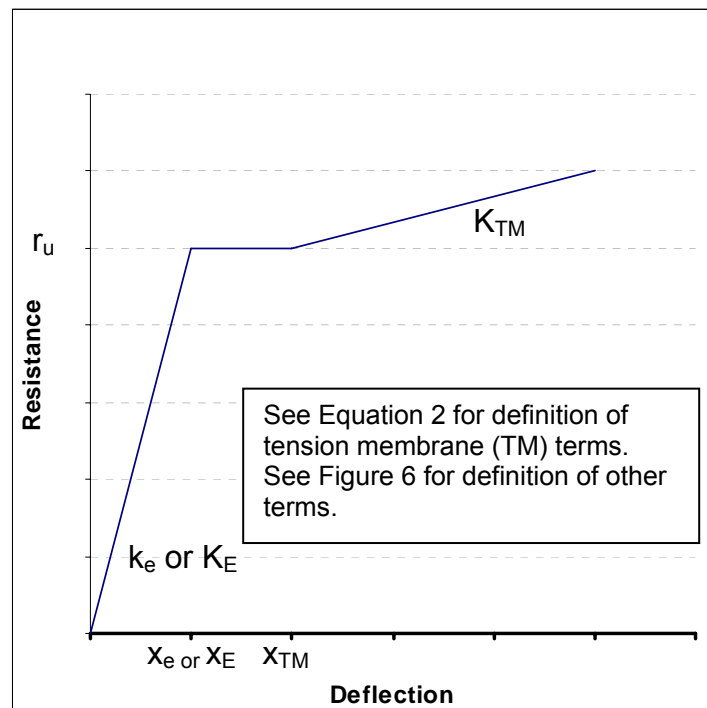


Figure 7. Resistance Deflection Curve for Steel Components with Tension Membrane

$$x_{TM} = x_E + \sqrt{\frac{4TL^2}{\pi^2 EA}} \quad \text{where } T = \text{Minimum}[(f_{dy}A), V_c]$$

$$K_{TM_1} = \frac{8T}{bL^2}$$

$$K_{TM_2} = \frac{T\pi^3}{4bL_y^2 \sum_{n=1,3,5,7} \left[\frac{1}{n^3} (-1)^{(n-1)/2} A \right]} \quad \text{where } A = 1 - \frac{1}{\cosh \frac{n\pi L_x}{2L_y}} \quad \text{and } L_x \geq L_y$$

Equation 2

- where:
- x_{TM} = assumed deflection at beginning of linear tension membrane response adding to flexural response for one and two-way response
 - K_{TM_i} = linear tension membrane slope for one-way (i=1) or two-way (i=2) response
 - x_E = equivalent elastic yield deflection
 - f_{dy} = dynamic yield strength
 - A = component cross sectional area within loaded width b
 - V_c = support force available for resisting component tension
(Based on lesser of connection capacity or in-plane flexural capacity of supporting framing member)
 - L = span length (least span length for two-way components)
 - E = Young's modulus for steel
 - b = supported width loaded by blast (typically unit width for panels or plates)


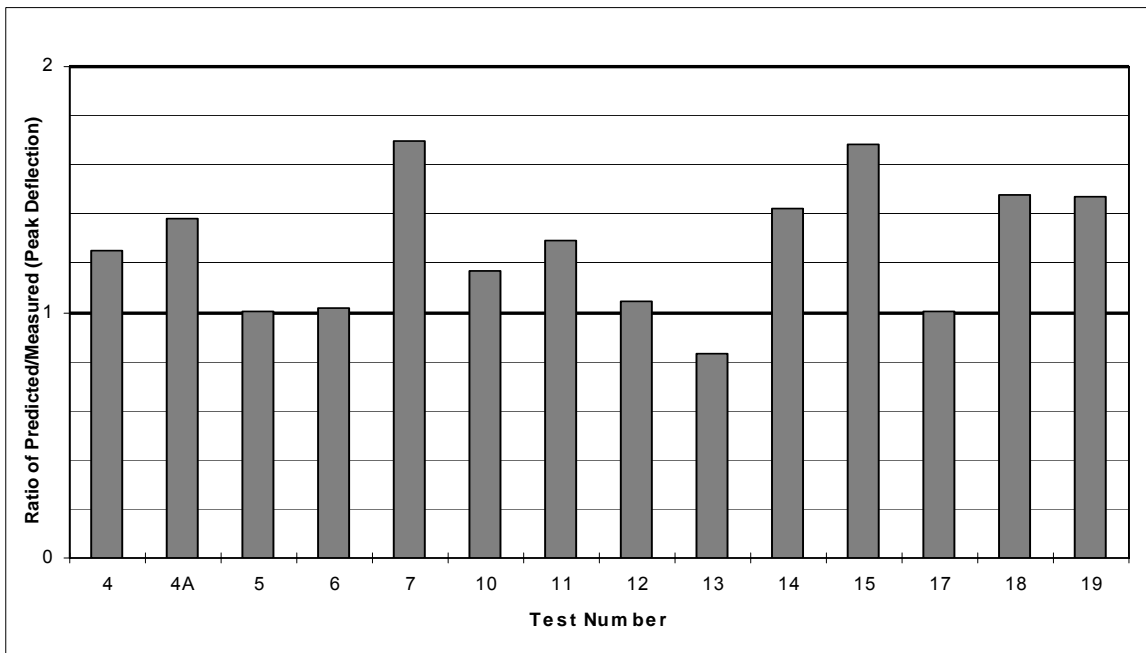


Figure 8. Comparison of Measured Maximum Deflections of Girts in Shock Tube Tests to Deflections Predicted with Figure 7 and Equation 2

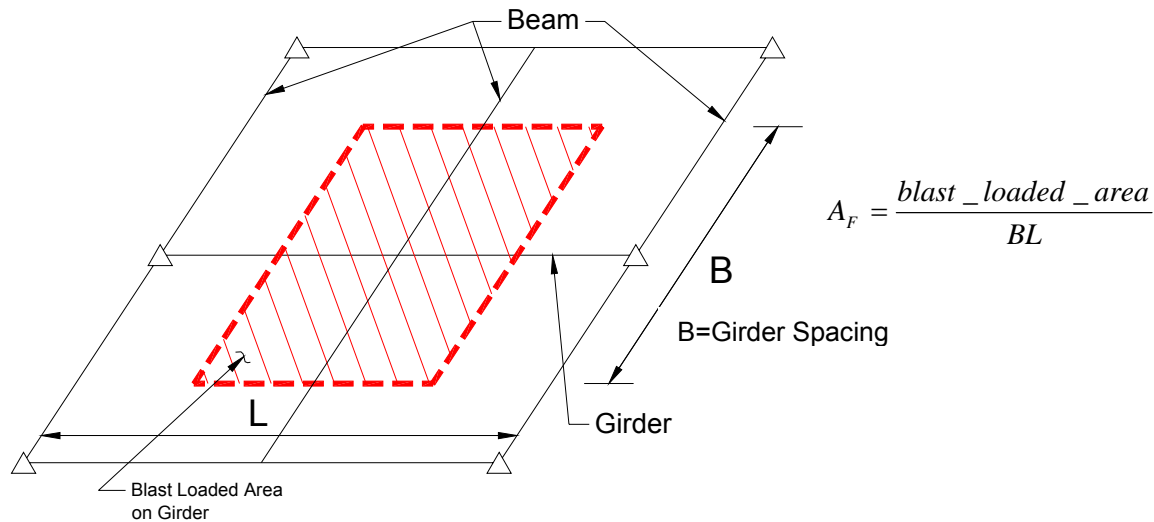

Note that beams only transfer blast load from 50% of the area $B \cdot L$ into girder in this example where the beams have a pinned connection to girders. The blast load from the rest of this area is transferred by beams directly into columns supporting girder.

Figure 9. Example of Girder with Loaded Area Factor (A_F) Equal to 0.5

$$w_{equiv} = W_F \left(\frac{P}{B_L} + P_{DYN}(t) \frac{B_a}{B_L} \right) \Delta(t)$$

$$W_F = \frac{K}{L^2} C$$

Equation 3

- where:
- $w_{equiv}(t)$ = equivalent lateral load with same spatial distribution as blast load causing P-delta moments in component (added to applied blast load)
 - W_F = equivalent P-delta load factor
 - K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
 - = 4 for component supported top and bottom with concentrated midspan load
 - = 2 for uniform load component supported at bottom of axially loaded span
 - C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 - $C = 0.64$ for all two-way spans (this is conservative in some cases)
 - $C = 1.0$ for all one-way spans
 - L = span length (in direction of axial load for 2-way spanning components)
 - P = total static axial load applied to analyzed component
 - $P_{DYN}(t)$ = dynamic axial load per unit width from supported component (usually the dynamic reaction force from a supported component along its support) See Equation 4.

$\Delta(t)$ = displacement of SDOF system at each time step
 I_{avg} = average of gross and cracked moment of inertia
 A = cross sectional area
 B_a = loaded width of analyzed component subject to dynamic axial load
 B_L = blast loaded width of analyzed component

$$P_{DYN}(t) = V(t)L_s$$

Equation 4

where:

P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
 $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers). See Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
 L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
 (Example: L_s = 60 in for a 10 ft simply supported or fixed-simple beam.
 L_s = 120 in for axial load 20 ft high wall slab)

Table 7. Calculated Deflections from SBEDS for W12x40 Beam-Column Compared to Theoretical Values (Moment Magnifier)

| Boundary Condition | Span (ft) | Effective Length (ft) | Calculated with SBEDS | Theoretical (Calculated with Moment Magnifier Method*) | SBEDS/Theoretical |
|--------------------|-----------|-----------------------|-----------------------|--------------------------------------------------------|-------------------|
| Fixed-Fixed | 50 | 25 | 1.25 | 1.11 | 1.13 |
| | 40 | 20 | 1.16 | 1.02 | 1.14 |
| | 30 | 15 | 1.09 | 0.94 | 1.16 |
| Fixed-Simple | 50 | 35 | 1.46 | 1.45 | 1.01 |
| | 40 | 28 | 1.33 | 1.28 | 1.04 |
| | 30 | 21 | 1.19 | 1.13 | 1.05 |
| Simple-Simple | 50 | 50 | 1.81 | 1.78 | 1.02 |
| | 30 | 30 | 1.45 | 1.43 | 1.01 |
| | 15 | 15 | 1.11 | 1.11 | 1.00 |

* $C_m=0.85$ for fixed support, $C_m=1.0$ for simple support, C_m estimated as 0.93 for fixed simple support

Note: Static uniform lateral load in SBEDS was 50% of load causing first yield and axial load was 50% of axial load capacity in all cases above for W12x40 where weak axis had continuous lateral support.

$$R_{u_shear} = \frac{V_s}{K_L L} \text{ for panels or plates, } R_{u_shear} = \frac{V_s}{K_L LB} \text{ for beams}$$

Equation 5

- where:
- R_{u_shear} = Ultimate resistance of component based on shear capacity per unit loaded area
 - V_s = Shear capacity force per unit width for panels and slabs, shear capacity force for beams and columns
 - $K_L L$ = Ratio K_L of span L causing maximum shear force at support based on boundary conditions. Example: $K_L=0.5$ for simply supported beam, $K_L=0.625$ for beam with simple-fixed supports, $K_L L$ for two-way spanning components is conservatively based on shortest distance from maximum deflection to support in the yield line pattern – see Table 4-7 in TM5-1300 for more exact calculation of shear at distance d from supports of two way spanning components)
 - B = Width of blast loaded area supported by beam


Input of Metal Stud Wall Components

| Item | Explanation |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flexural Response | <ul style="list-style-type: none"> Flexural response SDOF parameters are determined using load-mass, stiffness, and ultimate resistance values based on Section 10.9 and 11 of UFC 3-340-01 and TM 5-1300. See illustration in Figure 10. |
| Flexural and Tension Membrane Response | <ul style="list-style-type: none"> Response is based on yielding at the maximum moment regions (using K_E in Figure 10 for indeterminate boundary conditions) followed by linear tension membrane response as shown in Figure 12. <i>The component must have supports that resist in-plane displacement as the component responds to blast load.</i> The in-plane tension capacity of the component supports must be input as explained below in this table. Tension membrane response calculations are approximate. A constant tension membrane stiffness based on the maximum tension in component is assumed to add to the flexural response at a deflection x_{TM}, as shown in Figure 12 Equation 6. Previous calculations by BakerRisk for shock tube tests show this approximate method compares reasonably well to test data as shown in Figure 13, where predicted girt deflections were based on Figure 12 and Equation 6 for one-half scale shock tube tests on steel panels supported by cold-formed steel girts. Conservatively, tension membrane response can be ignored. <p>Note: When $K_{TM} > K_E$ in Figure 12, tension membrane stiffness exceeds flexural stiffness. The SDOF analysis will not correctly calculate rebound for this case and calculations are stopped at the maximum deflection. If rebound is critical, another methodology should be used to calculate response.</p> |
| Metal Stud Shapes | <ul style="list-style-type: none"> Structural metal stud shapes are shown in the drop down table as designated by the Steel Stud Manufacturer's Association (SSMA) for structural and non-structural studs. The stud shape designations refer to member dimensions as shown in Figure 11 and Table 8. Also, see www.ssma.com/ssmatechcatalog.pdf for additional information. Manufacturers with their own shape designations typically have a correlation to the SSMA shape designations available on their website or from their technical representatives. User defined cross sectional information can also be input. |
| Web Punch-Outs | <ul style="list-style-type: none"> Web punch-outs are typically provided on the centerline of the web in metal studs to facilitate electrical conduit placement within the wall. Standard factory punch-outs have a minimum center-to-center spacing of 24 inches, a maximum width equal to the lesser of one-half the member depth or 2.5 inches, and a maximum length of 4.5 inches. The minimum distance to the supports is 10 inches. If designated by the user, SBEDS reduces the critical axial section of the stud for compression and tension loads based on the stud thickness and punch-out width, but does not change not the flexural or shear capacity. See Figure 11 for an illustration of a punch-out. See www.ssma.com/ssmatechcatalog.pdf for additional information. |
| Supported Weight (Exclusive of Structural Veneer Wall) | <ul style="list-style-type: none"> This weight includes any items attached to the studs exclusive of a <u>structural</u> veneer wall. This includes the weight of any interior drywall and non-structural veneer wall. The user can designate the veneer wall as structural or non-structural on the input sheet. |
| Static Strength Increase Factor | <ul style="list-style-type: none"> This factor is assumed equal to 1.21 for both Grade 33 and Grade 50 A653 cold-formed steel as recommended in TM 5-1300. This factor can also be referred to as an average strength factor (ASF). |
| Dynamic Strength Increase Factor | <ul style="list-style-type: none"> This factor is assumed equal to 1.1 for both Grade 33 and Grade 50 A653 cold-formed steel as recommended in TM 5-1300. |

| Item | Explanation |
|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Moment Capacity | <ul style="list-style-type: none"> • Moment capacity for metal studs without axial load is calculated as $f_{dy} * S_{eff}$, where S_{eff} is the effective section modulus assuming that they are well braced. • Moment capacity for stud-columns is calculated using Equation 5-44 in TM 5-1300 with $M_y=0$ and $C_m/(1-P/P_{ex})=1$, since there is no biaxial bending and second order P-delta effects are accounted for directly in SDOF calculations as described below. The compressive axial load includes the input static axial load and the peak dynamic axial load. Equation 5-44 is set equal to 1.0 and solved for M_x, which is the “available” moment capacity and is used to calculate flexural resistances in SBEDS. The compression flange is assumed to be well braced. Equation 5-44 in TM 5-1300 is virtually the same as the controlling interaction formula in the LRFD manual for cold-formed steel design for simple supports. |
| Static Axial Load per Unit Width for Compression and P-delta Loading, P' (Only for load-bearing walls) | <ul style="list-style-type: none"> • User should input static axial load on stud divided by the stud spacing (P') that causes compression and P-delta moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on $(P'+P_{DYN}) * (\text{deflection at each time step})$ assuming no resisting moment at the supports, at each time step in SDOF calculations. w_{equiv} is calculated as shown in Equation 3 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is approximate, especially for 2-way spans and one-way spans with fixed boundary conditions. • Do not input static or blast load from roof components if also inputting dynamic axial load. See Section 4.4 of SBEDS Methodology Manual for more info. <p>Note: See Table 7 for comparison of equivalent lateral load method in SBEDS to theory where elastic, essentially static lateral load was input with axial load.</p> |
| Dynamic Axial Load for Compression and P-delta Loading, P_{DYN} (Only for load-bearing walls) | <ul style="list-style-type: none"> • <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. • <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with a dynamic reaction load from a supported roof or overhead component. The load is applied over the blast-loaded width of the analyzed component. The input text file can be modified for cases where the axially loaded width is not equal to the blast loaded width as discussed in Appendix A. The input file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. The last line of input file has -999 followed by a comma and the span length, L_s (inch or mm) of the supported component that applies the dynamic reaction pressure (see Equation 8). SBEDS determines P_{DYN} as shown in Equation 8 and uses it to determine an equivalent P-delta load as shown in Equation 7. See Appendix A for an example dynamic axial load input file. Also, see Section 4.4 of SBEDS Methodology Manual. <p>Note: The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file into SBEDS as a dynamic axial load input file on a supporting component.</p> |
| Support capacity for tension membrane, V_c | <ul style="list-style-type: none"> • V_c is the maximum in-plane tension strength provided by the metal stud connection and supporting framing members to the input component. See Equation 6 for effect of V_c on tension membrane response. • Typically $V_c < f_{dy}A$ and therefore the support capacity controls maximum tension force in component, where A is the effective axial area including the effects of web punch-outs. • V_c can be based on the full capacity of the connection when the component |

| | |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>bears against its support during blast load, otherwise some reduction can be made to account for out-of-plane shear forces on connection acting with in-plane tension.</p> <ul style="list-style-type: none"> • V_c can also be limited by the in-plane flexural strength of the framing component supporting the component of interest. |
| Deflection at beginning of tension membrane response, x_{TM} | <ul style="list-style-type: none"> • See Equation 6 for calculation of x_{TM}. <u>Note that x_{TM} is not an input.</u> • x_{TM} is equal to the theoretical deflection to achieve maximum tension force in component plus deflection to full flexural yielding. The additional deflection to yield approximately accounts for flexibility in the structure, oversized bolt holes, and other effects that allow some inward movement of supports. |
| Peak Equivalent Static Reactions | <ul style="list-style-type: none"> • Equivalent static reactions on the <i>Input</i> sheet are based on formulas in TM 5-1300 using the larger of the ultimate flexural resistance for inbound or rebound. These reactions are treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on input Dynamic Shear Factors are shown on the <i>Results</i> sheet but is not used to calculate Peak Equivalent Static Reactions. |
| Shear Strength Calculations | <ul style="list-style-type: none"> • The shear strength is calculated based only on the metal studs using Table 5-5 through 5-7 in TM 5-1300 accounting for shear buckling effects in the web. |
| Veneer wall | <ul style="list-style-type: none"> • The user can input a non-structural veneer wall, where the weight of the veneer is input separately as a Supported Weight as noted previously in this table. If a significant portion of a veneer wall is interrupted by a window opening, the veneer wall should be considered non-structural. • Alternatively, the user can select a given veneer wall type that is assumed to provide strength in a response mode of brittle flexural response and axial load arching. See the Unreinforced Masonry Walls section of this document for more information. Only self weight above midheight is assumed to act as axial load on the veneer wall. • The veneer wall is assumed to deflect with the metal studs and have the same height or span as the wall studs. It is always assumed to span one-way with simple boundary conditions. • The resistance-deflection curves for a structural veneer wall and the input metal stud wall are superimposed for initial inbound response. If the veneer wall yields, only the metal stud wall response is assumed by SBEDS during rebound. <i>Typically, the resistance of the veneer wall adds relatively little to the overall blast capacity to the wall system (less than 20%).</i> |
| ReRunning SDOF with Resistance Controlled by Shear Capacity (Shear Flag) | <ul style="list-style-type: none"> • If the shear capacity $V_s < \text{Peak Equivalent Static Reactions}$, SBEDS provides a user option to recalculate dynamic response using R_{u_shear} from Equation 5 for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. The user must enter a value of 1 in the Shear Flag input cell created by SBEDS when $V_s < \text{Peak Equivalent Static Reactions}$ in order to rerun SBEDS with maximum resistances of R_{u_shear} where $R_i > R_{u_shear}$. Resistances based on tension membrane are not affected. The Error Message area on the Input Sheet provides directions for rerunning the SDOF analysis using R_{u_shear}. • Note that the Peak Equivalent Static Reactions in SBEDS are based on the ultimate flexural resistance (R_u), not the maximum calculated resistance (R_{max}) from the SDOF analysis. If the shear flag is calculated for a case where $R_{max} < R_u$, the actual reactions may not exceed the shear strength as displayed by SBEDS in a message box. • DoD design methods may require that the shear capacity $V_s \geq \text{Peak Equivalent Static Reactions}$. In this case, redesign the component with no shear flag input • Use of the shear flag is generally only recommended for analysis of existing components. HOWEVER, SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response. |

| | |
|-----------------|----------------------------------------------------------------------------------------------------------|
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |
|-----------------|----------------------------------------------------------------------------------------------------------|

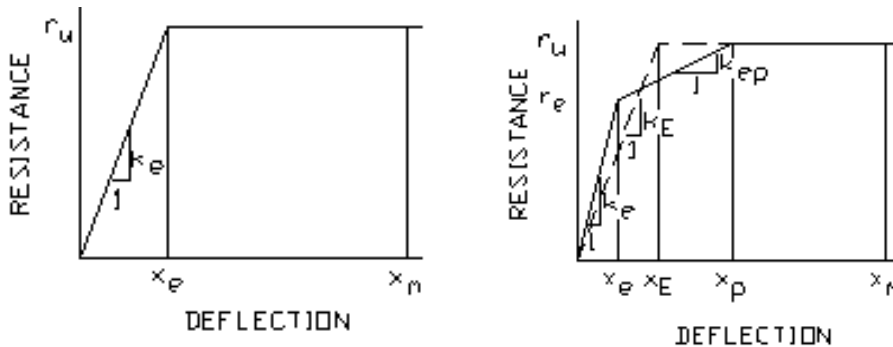

Determinate Boundary Conditions

Indeterminate Boundary Conditions

(Solid Curve Used for Flexure Only)

(Dashed Curve for Flexure and Tension Membrane)

Figure 10. Resistance-Deflection Curve For Flexural Response

MEMBER DEPTH:


(Example: 6" = 600 × 1/100 inches)

All member depths are taken in 1/100 inches.
For all "T" sections member depth is the inside to inside dimension.

FLANGE WIDTH:

(Example: 1 5/8" = 1.625" ≈ 162 × 1/100 inches)

All flange widths are taken in 1/100 inches.

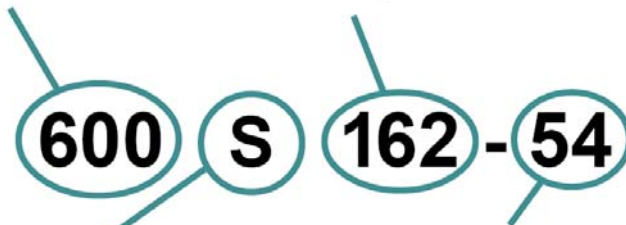

STYLE:

(Example: Stud or Joist section = S)

The four alpha characters utilized by the designator system are:

S = Stud or Joist Sections

T = Track Sections

U = Channel Sections

F = Furring Channel Sections

MATERIAL THICKNESS:

(Example: 0.054 in. = 54 mils;

1 mil = 1/1000 in.)

Material thickness is the minimum base metal thickness in mils. Minimum base metal thickness represents 95% of the design thickness.



Figure 11. Metal Stud Size Designation and Cross Section of Typical S-Section Stud with Punch-Out (See Table 8 Below for Information on Mils)

Table 8. Correlation Between Metal Stud Gage Thickness and Mils

| Gage | Minimum Thickness (1/1000 of an inch= mil) | Minimum Thickness (mm) |
|------|-----------------------------------------------|---------------------------|
| 25 | 18 | 0.455 |
| 22 | 27 | 0.683 |
| 21 | 30 | 0.752 |
| 20 | 33 | 0.836 |
| 18 | 43 | 1.09 |
| 16 | 54 | 1.37 |
| 14 | 68 | 1.72 |
| 13 | 88 | 2.24 |

| | | |
|----|-----|------|
| 12 | 97 | 2.45 |
| 10 | 118 | 3.00 |

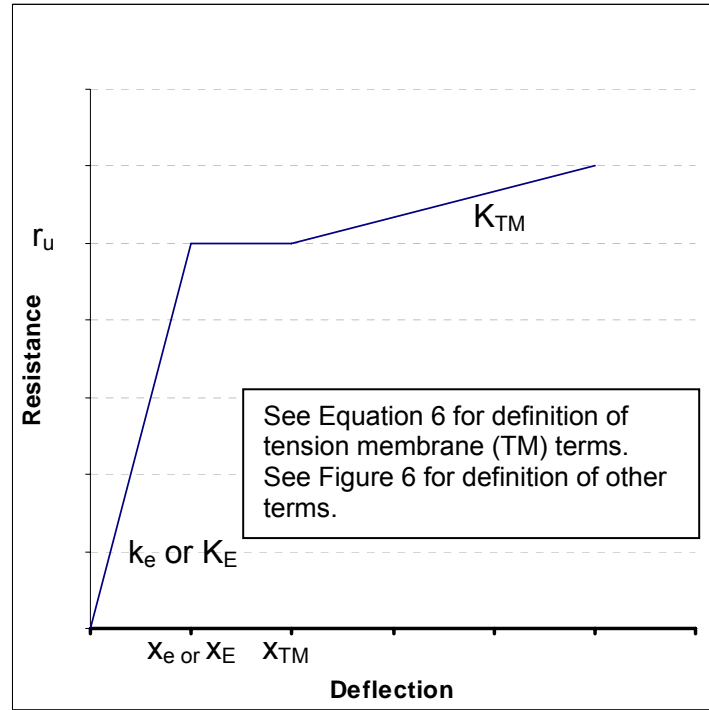


Figure 12. Resistance Deflection Curve for Steel Components with Tension Membrane

$$x_{TM} = x_E + \sqrt{\frac{4TL^2}{\pi^2 EA}} \quad \text{where } T = \text{Minimum}[(f_{dy}A), V_c]$$

$$K_{TM_1} = \frac{8T}{bL^2}$$

$$K_{TM_2} = \frac{T\pi^3}{4bL_y^2 \sum_{n=1,3,5,7} \left[\frac{1}{n^3} (-1)^{(n-1)/2} A \right]} \quad \text{where } A = 1 - \frac{1}{\cosh \frac{n\pi L_x}{2L_y}} \quad \text{and } L_x \geq L_y$$

Equation 6

- where:
- x_{TM} = assumed deflection at beginning of linear tension membrane response adding to flexural response for one and two-way response
 - K_{TM_i} = linear tension membrane slope for one-way (i=1) or two-way (i=2) response
 - x_E = equivalent elastic yield deflection
 - f_{dy} = dynamic yield strength
 - A = component cross sectional area within loaded width b
 - V_c = support force available for resisting component tension (Based on lesser of connection capacity or in-plane flexural capacity of supporting framing member)
 - L = span length (least span length for two-way components)

E = Young's modulus for steel
b = supported width loaded by blast (typically a unit width for panels or plates)

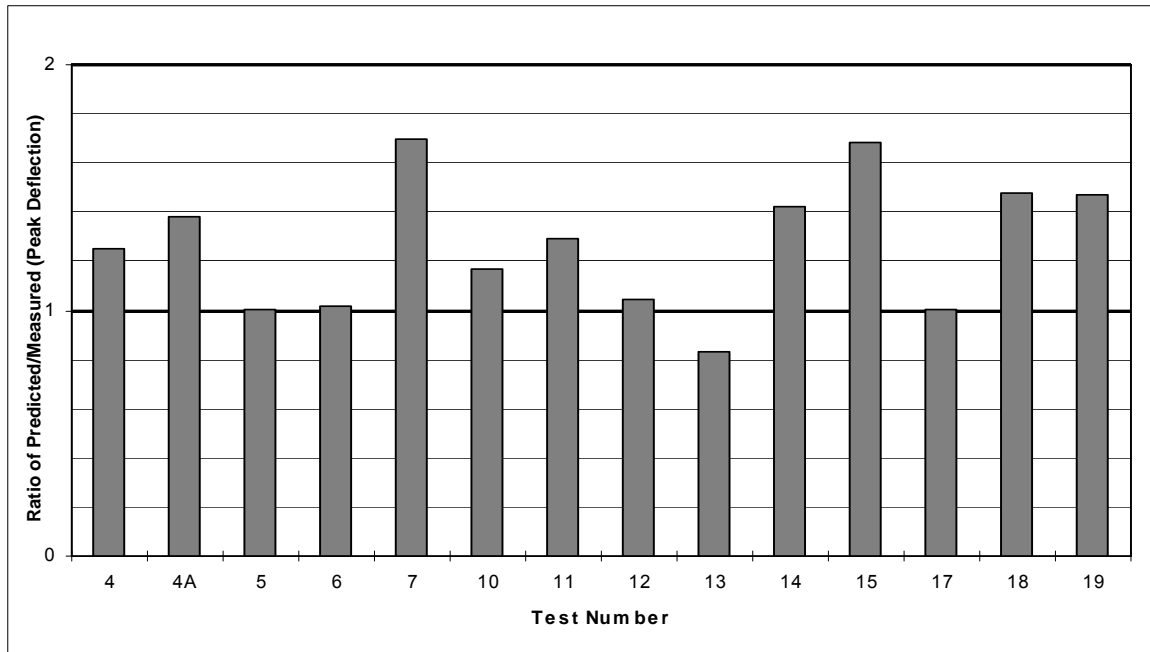


Figure 13. Comparison of Measured Maximum Deflections of Girts in Shock Tube Tests to Deflections Predicted with Figure 7 and Equation 2

$$w_{equiv} = W_F \{P' + P_{DYN}(t)\} \Delta(t)$$

$$W_F = \frac{K}{L^2} C$$

Equation 7

- where:
- w_{equiv} = equivalent lateral load with same spatial distribution as blast load causing $P\Delta$ moments in component (added to applied blast load)
 - W_F = equivalent P-delta load factor
 - K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
 - = 4 for component supported top and bottom with concentrated midspan load
 - = 2 for uniform load component supported at bottom of axially loaded span
 - C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 - C = 0.64 for all two-way spans (this is conservative in some cases)
 - C = 1.0 for all one-way spans
 - L = span length (span in direction causing axial load for 2-way spanning components)
 - P' = total static axial load applied over blast loaded width of analyzed component divided by the blast loaded width
 - $P_{DYN}(t)$ = dynamic axial load per unit loaded width (usually the dynamic

reaction force from a supported component loaded by blast). See Equation 8

$\Delta(t)$ = maximum component displacement at each time step

$$P_{DYN}(t) = V(t)L_s$$

Equation 8

- where:
- P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
 - $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers) See Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
 - L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
(Example: $L_s = 60$ in for a 10 ft simply supported or fixed-simple beam.
 $L_s = 120$ in for axial load 20 ft high wall slab)
- Note: L_s can be modified in the saved file for cases where P_{DYN} is applied over a width different from the blast loaded width – see Appendix A.

$$R_{u_shear} = \frac{V_s}{K_L LB}$$

Equation 9

- where:
- R_{u_shear} = Ultimate resistance of component based on shear capacity per unit loaded area
 - V_s = Shear capacity force per unit width for panels and slabs, shear capacity force for beams and columns
 - $K_L L$ = Ratio K_L of span L causing maximum shear force at support based on boundary conditions Example: $K_L=0.5$ for simply supported beam, $K_L=0.625$ for beam with simple-fixed supports
 - B = Width of blast loaded area supported by beam

Input for Open Web Steel Joists

| Item* | Explanation |
|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Allowable joist design load, w_{design} | <ul style="list-style-type: none"> • Allowable load for given span from load tables in manufacturer's and Steel Joist Institute literature. SBEDS backs out a constant moment capacity for each joist from load tables and uses this to calculate w_{design} except that a constant w_{design} is used for when the span length is less the critical value causing constant w_{design} in the load tables. • Ultimate dynamic resistance is based on $2.12 \cdot w_{design}$, where the 2.12 factor includes a safety factor of 1.7 and static and dynamic increase factors of 1.05 and 1.19, respectively. • If the ultimate capacity is controlled by shear response rather than flexural yielding in the chords, lower maximum response criteria should be used for design. Shear control can be indicated by spans where the change in allowable load capacity is not proportional to the square of the change in span length in the manufacturer's literature. |
| Load causing L/360 deflection, w_{LL} | <ul style="list-style-type: none"> • Load causing L/360 deflection for given span from load tables in manufacturer's and Steel Joist Institute literature. The literature has values of w_{LL} for shorter spans, where w_{design} becomes constant, that probably underestimate the actual load causing L/360 deflection. SBEDS backs out a constant EI for each joist from load tables and uses this to calculate w_{LL} for all span lengths. • The elastic stiffness for SDOF calculations is based on $w_{LL}/(L/360)$ |
| Equivalent Static Reactions | <ul style="list-style-type: none"> • Peak equivalent static reactions on the <i>Input</i> sheet are based on the ultimate flexural resistance and formulas in TM 5-1300. Peak dynamic reaction information, which is based on the Dynamic Shear Factors on the <i>Input</i> sheet, is shown on the <i>Results</i> sheet. |
| All Other Items | Return to top of document and link to Help on <i>General Input and Output Items Including Blast Load</i> |
| *These items are not required inputs – information is provided for background knowledge or for cases where “User Defined” input is required. | |

Reinforced Concrete Slab Components

| Item | Explanation |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Width Resisting Blast Load / Loaded Width; B_w | <ul style="list-style-type: none"> For one-way spanning slabs only, SBEDS allows input of a width resisting blast load that is less than the loaded width. Therefore, $0 < B_w \leq 1.0$. This is applicable for analyzing the wall area between windows, where B_w equals the (wall width between windows)/(center-to-center distance between windows). SBEDS will give an error message if $0 < B_w \leq 1.0$ is not true. <i>Input $B_w=1.0$ for the typical case of slab without openings.</i> |
| Flexural Response | <ul style="list-style-type: none"> Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 6. Load-mass, stiffness, and ultimate flexural resistance for all one-way and two-way components are based on Chapter 3 in TM 5-1300, except as stated below. SBEDS calculates all moment capacities based only on the input tension reinforcing steel. There is no consideration of reinforcing steel input for the opposite face of the member. The elastic resistances for two-way components with fixed supports are based on Table 10-5 in UFC 3-340-01. For components with adjacent fixed supports, the elastic resistance is from only the negative moment capacity acting on the yield line pattern corresponding to the ultimate resistance. All ultimate resistances for two-way spanning components are calculated based on TM 5-1300 with a 1.08 increase factor to account for conservative approach in TM 5-1300 where only 2/3 maximum moment capacity is assumed in corners. |
| Flexural and Compression Membrane Response | <ul style="list-style-type: none"> See above discussion for flexural response. An equivalent elastic stiffness (K_E in Figure 14) is used for flexural response. For two-way components with fixed boundaries, K_E is based on Equation 3.34 in TM 5-1300 assuming equal positive and negative moment capacities. Compression membrane response is calculated as described in Chap. 10 in UFC 3-340-01. Boundary conditions must be as shown in Figure 18. The supports should be very stiff against in-plane forces so they cause material crushing as the wall or slab rotates at the supports under lateral load. These boundary conditions can typically be achieved by symmetry for a slab continuous over its supports or by an infill wall built with a tight fit (i.e. no gap) between heavy reinforced concrete framing members. Otherwise, ignore compression membrane effects. The resistance deflection curve is similar to that shown in the portion of Figure 17 for flexural and compression membrane response. |
| Flexural and Tension Membrane Response | <ul style="list-style-type: none"> See above discussion for flexural response. An equivalent elastic stiffness (K_E in Figure 14) is used for flexural response. For two-way components with fixed boundaries, K_E is based on Equation 3.34 in TM 5-1300 assuming equal positive and negative moment capacities. Tension membrane response is calculated as described in Chapter 10 in UFC 3-340-01. Tension membrane response should only be based on unspliced, continuous steel along at least one face of the component. Boundary conditions must be as shown in Figure 18. Otherwise, tension membrane effects should not be included. The resistance deflection curve is similar to that shown for the flexural and tension membrane response portions of Figure 17. |

| Item | Explanation |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flexural, Compression and Tension Membrane Response | <ul style="list-style-type: none"> • See above discussion for <i>Flexural, Compression and Tension Membrane Response</i>. • The resistance deflection curve is based on Chapter 10 in UFC 3-340-01 and is similar to that shown in Figure 17. • Due to limited number of rebound stiffnesses available in SBEDS, there is no rebound tension membrane stiffness is used for flexural response with compression and tension membrane. |
| Type of Cross Section | <ul style="list-style-type: none"> • For a Type I cross section, the entire dynamic response is calculated assuming the compression force of the resisting moment is provided by the concrete at all maximum moment regions - even at large support rotations. A Type I cross section should always be assumed if there is no compression face reinforcing steel. • For a Type II cross section, the dynamic response is calculated assuming a Type I cross section at all maximum moment regions up to a support rotation of 2 degrees, and a Type II cross section at larger support rotations. The compression force of the resisting moment is provided by the reinforcing steel at the compression face in a Type II cross section. This only affects the ultimate resistance of the equivalent SDOF system. SBEDS transitions to a Type II cross section over a support rotation of 0.2 degrees (i.e. between 2 and 2.2 degrees). The user can see this effect on the resistance-deflection curve shown on the Input worksheet. See Figure 15 for a comparison of Type I and Type II cross sections. According to UFC 3-340-01 and TM 5-1300, a Type I cross section is only applicable up to 2 degrees of support rotation and stirrups are required in the maximum moment regions to provide lateral support to the compression face reinforcing steel. However, available test data indicates that this assumption is conservative, except possibly at very high steel reinforcing ratios as discussed in the SBEDS Methodology Manual. • If the calculated support rotation exceeds 2 degrees for a Type II cross section, SBEDS provides a warning message that stirrups are required to provide lateral support for compression reinforcing steel in all maximum moment regions. |
| Reinforcing Steel Areas | <ul style="list-style-type: none"> • See Note: Averaging is necessary for cases with unequal steel - SBEDS allows only one input for this steel. • Figure 16 for definition of terms used for input of reinforcing steel areas • SBEDS assumes that the lesser of the areas of steel input for inbound and rebound steel (see Note: Averaging is necessary for cases with unequal steel - SBEDS allows only one input for this steel. • Figure 16) at each face in negative and positive moment regions are continuous and unspliced along that face for any tension membrane calculations. |
| Distance of Cover to Center of Bars | <ul style="list-style-type: none"> • See Note: Averaging is necessary for cases with unequal steel - SBEDS allows only one input for this steel. • Figure 16 for definition of terms used for input cover distance (d_c) over reinforcing bars. |
| Concrete Static Strength Increase Factor | <ul style="list-style-type: none"> • This is ratio of the actual expected concrete strength to the minimum specified strength. UFC 3-340-01 recommends a static increase factor of 1.1, unless available test data indicates otherwise, and an aging factor of 1.1 for concrete aged at least 6 months or 1.15 for concrete aged at least 1 year. These two increase factors may be combined for a maximum input static increase factor of 1.26. Conservatively, no static increase factor is recommended in TM 5-1300. This factor can also be referred to as an average strength factor (ASF). |

| Item | Explanation |
|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Concrete Dynamic Strength Increase Factor | <ul style="list-style-type: none"> This is ratio of the dynamic concrete strength including strain-rate effects to the expected static strength. TM 5-1300 recommends a value of 1.19 for far range loading and 1.23 for close-in loading (i.e. scaled standoff < 3 ft/lb^{1/3}). See UFC 3-340-01, Chapter 4 for more detailed information on the concrete dynamic increase factor as a function of strain-rate. The concrete strain-rate to yield is reported on the <i>Results</i> sheet based on a yield strain of 0.002. |
| Reinforcing Steel Yield Strength Dynamic and Static Strength Increase Factors | <ul style="list-style-type: none"> Default values of 1.1 for the static increase factor (this can also be referred to as an average strength factor (ASF)) and 1.17 for the dynamic increase factor are used in SBEDS as recommended in TM 5-1300. See UFC 3-340-01 Chapter 4 for more detailed information as a dynamic increase factor as a function of strain-rate. The steel strain-rate to yield is reported on the <i>Results</i> sheet. The increase factors can be modified using the "User Defined" input for the reinforcing steel. |
| Moment of Inertia (I) | <ul style="list-style-type: none"> I is calculated as average of cracked and uncracked moment of inertia using a Type I cross section according to Eq. 10-31 in UFC 3-340-01 and Figure 10-5 for a singly reinforced cross section to determine the cracked section coefficient, F, for I_{cracked}. This is slightly conservative for a doubly reinforced cross section. |
| Supported Weight | <ul style="list-style-type: none"> Input any supported weight that moves through same deflection as component. Do not include self-weight of slab. |
| Static Axial Load for P-delta Effects, P' (Only for load bearing walls) | <ul style="list-style-type: none"> User should input static axial load per unit width loaded by blast, P', causing P-delta moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on (P'+P_{DYN})*(deflection at each time step) assuming no resisting moment at the supports, at each time step in SDOF calculations. w_{equiv} is calculated as shown in Equation 3 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is an approximate approach, especially for two-way spans and one-way spans with fixed boundary conditions. Do not input static or blast load from roof components if also inputting dynamic axial load. Also, see Section 4.4 of SBEDS Methodology Manual. <p>Note: See Table 7 for comparison of method in SBEDS to theory where elastic, essentially static lateral load was input in SBEDS with axial load.</p> |
| Dynamic Axial Load for P-delta Loading, P _{DYN} (Only for load bearing walls) | <ul style="list-style-type: none"> <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with the dynamic reaction load from a supported roof or overhead component. The load is applied over the blast-loaded width of the analyzed component. The input text file can be modified for cases where the axially loaded width is not equal to the blast loaded width as discussed in Appendix A. The input file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. The last line of input file has -999 followed by a comma and the span length, Ls (inch or mm) of the supported component that applies the dynamic reaction pressure (see Equation 11). SBEDS determines P_{DYN} as shown in Equation 11 and uses it to determine an equivalent P-delta load as shown in Equation 10. See Appendix A for an example of an input dynamic axial load input file. See Section 4.4. of SBEDS Methodology Manual for more discussion. <p>Note: The user can use the save file option on the SDOF Output sheet (NOT</p> |

| Item | Explanation |
|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file later into SBEDS as a dynamic axial load input file on a supporting component.</p> |
| Equivalent Static Reactions | <ul style="list-style-type: none"> • Equivalent static reactions on the <i>Input</i> sheet are based on Table 3-9 and Table 3-10 in TM 5-1300 using the larger of the inbound and rebound ultimate <u>flexural</u> resistance. These reactions, which are per unit width over the full blast loaded area, are equivalent static shear loads compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors is shown on the <i>Results</i> sheet, but are not used to determine maximum equivalent static reactions. • The calculated maximum reaction at distance “d” from the support is applicable when support is on opposite face of component from blast load. For two-way components, the support reactions are multiplied by $(L'-d)/L'$, where L' is the shortest distance between the support and point of maximum deflection in the yield line pattern for the given direction. <i>This is a simplified, conservative value for 2-way components (see Table 4.7 in TM 5-1300 for more exact values).</i> |
| Shear Strength Calculations | <ul style="list-style-type: none"> • The direct and diagonal shear strengths are based on Chap. 10 in UFC 3-340-01, except no DIF for concrete in tension is used for the diagonal shear strength. However, the concrete compression strength used in the diagonal shear strength calculations includes the effects of the static and dynamic increase factors. No effects of axial compression or tension on shear strength are included, these should be added if they are applicable as described in UFC 3-340-01, Chapter 10.3. It is conservative to ignore axial compression. Required stirrup area is calculated if diagonal shear strength is less than equivalent static reactions. Calculations of any required stirrup area include steel static and dynamic increase factors. • The distance “d” used in SBEDS for shear calculations is equal to (thickness – applicable concrete cover), where the cover is the cover depth to the top layer of reinforcing steel at the supports of one-way spans, except for a simply support span where it is the cover depth to bottom steel at midspan. For two way spans, the above approach is used except the depths in both span directions are averaged. If the two-way span is fixed on two opposite sides and simply supported on two opposite sides, then it is the cover depth to the top steel only in the direction of the fixed span. This is summarized in Table 9. • SBEDS assumes the entire blast loaded width resists shear at the supports. If openings reduce width of wall resisting shear, multiply shear capacity by B_w and manually check shear. • The shear reinforcing steel area shown in SBEDS for slabs, which has units of in^2/in^2, is multiplied by the stirrup spacing in each direction to get a stirrup area. |
| Rerunning SDOF Calculations for Shear Controlled Slabs (Shear Flag) | <ul style="list-style-type: none"> • If the diagonal concrete shear capacity $V_c < \text{Peak Equivalent Static Reactions}$, SBEDS provides a user option to recalculate dynamic response using R_{u_shear} from Equation 12 (based only on diagonal concrete shear strength) for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. The user must enter a value of 1 (for max shear stress at supports) or 2 (for max shear stress at distance “d” from supports) in the Shear Flag input cell created by SBEDS to rerun SBEDS with maximum resistances of R_{u_shear} where $R_i > R_{u_shear}$. Resistances based on compression membrane, tension membrane, and arching are not affected. The Error Message area on the Input Sheet provides directions for rerunning the SDOF analysis using R_{u_shear}. Only use this option if sufficient stirrups cannot be provided and where shear controlled response is |

| Item | Explanation |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>acceptable (See SBEDS Methodology Manual.).</p> <ul style="list-style-type: none"> Note that the Peak Equivalent Static Reactions in SBEDS are based on the ultimate flexural resistance (R_u), not the maximum calculated resistance (R_{max}) from the SDOF analysis. If the shear flag is calculated for a case where $R_{max} < R_u$, the actual reactions may not exceed the shear strength as displayed by SBEDS in a message box. DoD design methods may require that the shear capacity $V_c \geq$ Peak Equivalent Static Reactions. In this case, redesign the component and do not use the shear flag. Use of the shear flag is generally only recommended for analysis of existing components. HOWEVER, SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response. |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

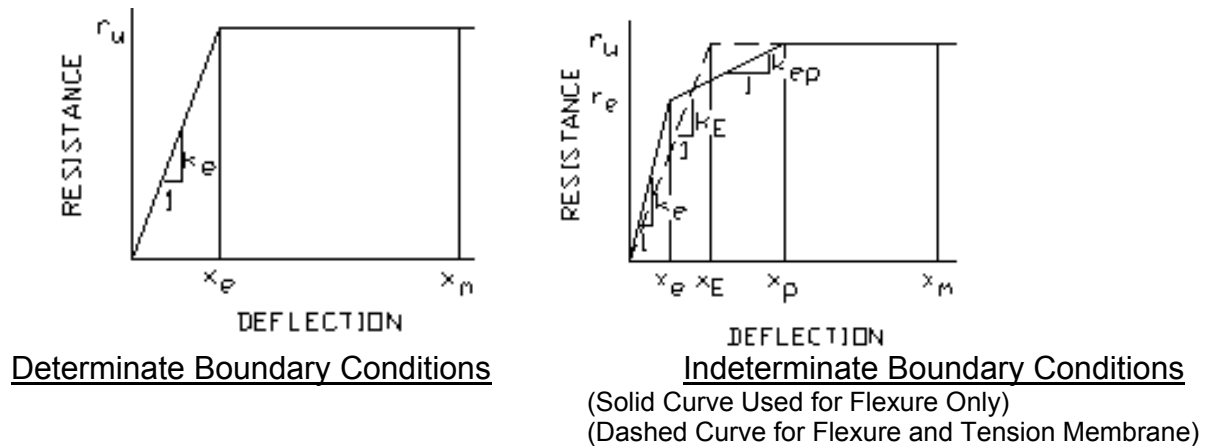


Figure 14. Resistance-Deflection Curve For Flexural Response



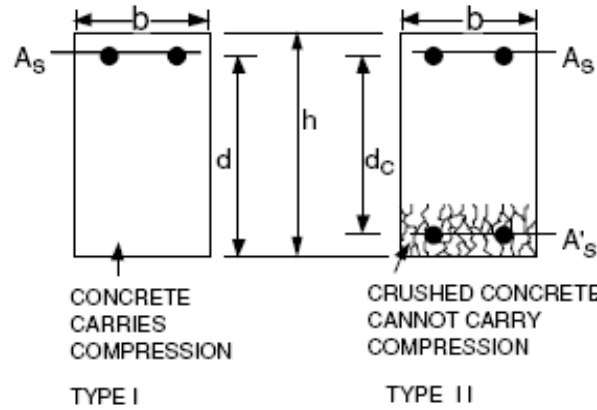


Figure 15. Type I and Type II Cross Sections

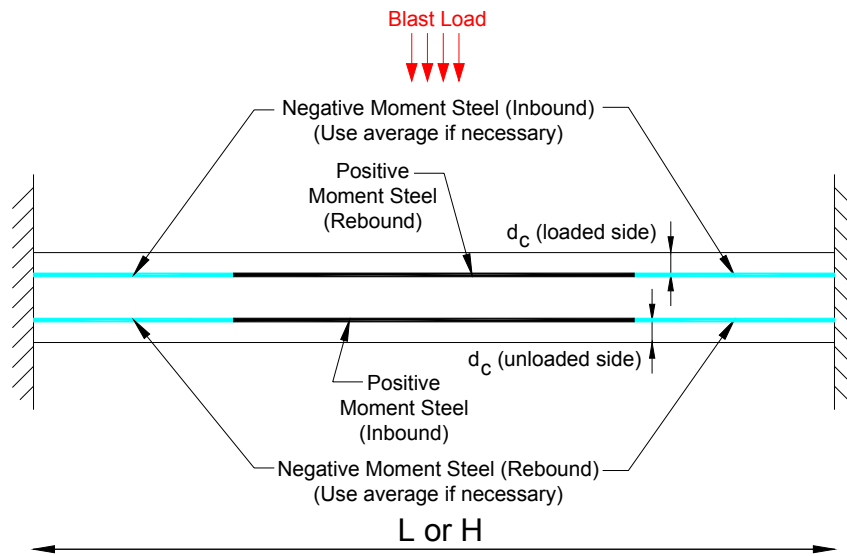

Note: Averaging is necessary for cases with unequal steel - SBEDS allows only one input for this steel.

Figure 16. Information for Input of Steel Area and Distance of Cover Depth (d_c)

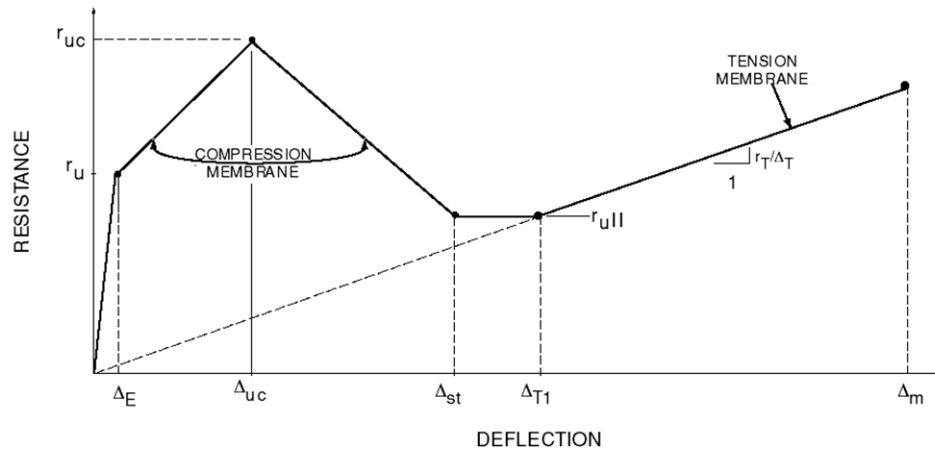

- | | |
|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| r_{uc} = COMPRESSIVE MEMBRANE ULTIMATE RESISTANCE TO UNIFORM LOAD (PARAGRAPH 10.4.2) | Δ_{st} = CENTRAL DEFLECTION AT SNAP-THROUGH (PARAGRAPH 10.4.2) |
| Δ_{uc} = CENTRAL DEFLECTION OCCURRING AT r_{uc} (PARAGRAPH 10.4.2) | Δ_{T1} = CENTRAL DEFLECTION WHERE TENSILE MEMBRANE SLOPE THROUGH ORIGIN REACHES r_{uII} (BUT $\Delta_{T1} \geq \Delta_{st}$) |
| r_{uII} = FLEXURAL RESISTANCE USING TYPE II ULTIMATE MOMENT CAPACITY (PARAGRAPHS 10.3.3.2 AND 10.9.1) | r_u = ULTIMATE FLEXURAL RESISTANCE TO UNIFORM LOAD (PARAGRAPH 10.9.1) |
| r_T/Δ_T = TENSILE MEMBRANE RESISTANCE/CENTRAL DEFLECTION (PARAGRAPH 10.4.3) | Δ_E = EQUIVALENT ELASTIC DEFLECTION IN FLEXURE (PARAGRAPH 10.9.1) |
| Δ_m = MAXIMUM CENTRAL DEFLECTION, CORRESPONDING TO DESIGN RESPONSE LIMIT (PARAGRAPH 10.10) | |

Figure 17. Resistance-Deflection Curve for Reinforced Concrete and Masonry Components with Compression and Tension Membrane (from UFC 3-340-01)

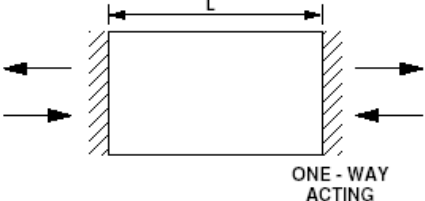
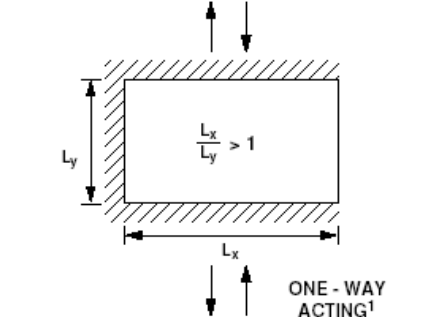
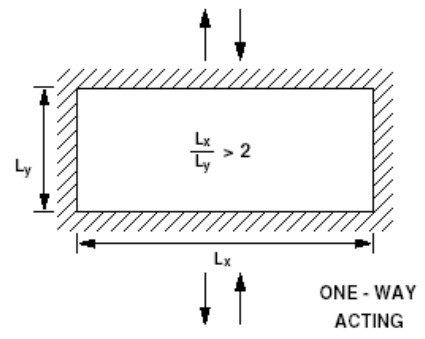
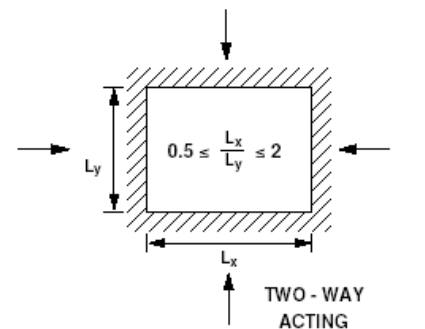
| EDGE SUPPORT CONDITIONS | EXTERNAL LATERAL RESTRAINT REQUIREMENTS |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p style="text-align: center;">ONE - WAY ACTING</p> | <p style="text-align: center;">OPPOSITE EDGES</p> |
|  <p style="text-align: center;">ONE - WAY ACTING¹</p> | <p style="text-align: center;">OPPOSITE EDGES SHORT DIRECTION</p> <p style="text-align: center;">¹AT L_x/L_y NEAR 1.0 TWO-WAY FLEXURE MAY CONTROL OVER ONE-WAY MEMBRANE</p> |
|  <p style="text-align: center;">ONE - WAY ACTING</p> | <p style="text-align: center;">OPPOSITE EDGES SHORT DIRECTION</p> |
|  <p style="text-align: center;">TWO - WAY ACTING</p> | <p style="text-align: center;">ALL EDGES FOR COMPRESSION MEMBRANE (NONE REQUIRED FOR TENSION MEMBRANE)</p> |

Figure 18. Boundary Conditions for Tension and Compression Membrane Response

$$w_{equiv} = W_F \{P' + P_{DYN}(t)\} \Delta(t)$$

$$W_F = \frac{K}{L^2} C$$

Note: $W_F = 0$ when $\frac{L}{\sqrt{\frac{I_{avg}}{A}}} < 22$ for concrete and masonry components

Equation 10

- where:
- w_{equiv} = equivalent lateral load with same spatial distribution as blast load causing $P\Delta$ moments in component (added to applied blast load)
 - W_F = equivalent P-delta load factor
 - K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
 - = 4 for component supported top and bottom with concentrated midspan load
 - = 2 for uniform load component supported at bottom of axially loaded span
 - C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 - $C = 0.64$ for all two-way spans (this is conservative in some cases)
 - $C = 1.0$ for all one-way spans
 - L = span length (span in direction causing axial load for 2-way spanning components)
 - P' = total static axial load applied over blast loaded width of analyzed component divided by the blast loaded width
 - $P_{DYN}(t)$ = dynamic axial load per unit loaded width (usually the dynamic reaction force from a supported component loaded by blast). See Equation 11
 - $\Delta(t)$ = maximum component displacement at each time step
 - I_{avg} = average of gross and cracked moment of inertia
 - A = cross sectional area

$$P_{DYN}(t) = V(t)L_s$$

Equation 11

- where:
- P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
 - $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers) as explained in Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
 - L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
 - (Example: $L_s = 60$ in for a 10 ft simply supported or fixed-simple beam.
 - $L_s = 120$ in for axial load 20 ft high wall slab)
 - Note: L_s can be modified in the saved file for cases where P_{DYN} is applied

over a width different from the blast loaded width – see Appendix A.

$$R_{u_shear} = \frac{V_s K_d}{K_L L}$$

When Shear Flag = 2, $K_d = \frac{K_L L - d}{K_L L}$ When Shear Flag = 1, $K_d = 1$

Equation 12

- where:
- R_{u_shear} = Ultimate resistance of component based on shear capacity per unit loaded area
 - V_s = Shear capacity force per unit width based only on concrete shear strength
 - $K_L L$ = Ratio K_L of span L causing maximum shear force at support based on boundary conditions ($K_L L$ for two-way spans is dependent on yield line pattern per Table 3-10 in TM 5-1300)
Example: $K_L=0.5$ for simply supported one-way slab, $K_L=0.625$ for fixed-simple one-way slab
 - d = distance from blast loaded face to reinforcing steel on opposite face (see discussion in table above)
 - K_d = Factor applicable when shear is controlled at distance d from support, which generally occurs when supports on are opposite side of slab from blast load. (K_d is controlled in SBEDS by user input Shear Flag value)

Table 9. Depth to Reinforcing Steel Used by SBEDS for Shear Strength Calculations

| Boundary Condition | Depth (d) Used for Shear Strength Calculations |
|----------------------------------------------------|-------------------------------------------------------|
| One-way, Cantilever | d at support |
| One-way, Fixed-Fixed | d at supports |
| One-way, Fixed-Simple | d at fixed support* |
| One-way, Simple-Simple | d at midspan |
| Two-Way, All Edges Simply Supported | Average d at midspan in both directions |
| Two-Way, All Edges Fixed | Average d at supports in both directions |
| Two-Way, Opposite Edges Fixed and Simply Supported | d at fixed supports * |
| *Highest shear load is at fixed support | |


Reinforced Concrete Beam-Column

| Item | Explanation |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flexural Response | <ul style="list-style-type: none"> Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 19. Load-mass, stiffness, and resistance values are based on TM 5-1300. |
| Flexural and Compression Membrane Response | <ul style="list-style-type: none"> See above discussion for flexural response. An equivalent elastic stiffness (K_E in Figure 19) is used for flexural response. Compression membrane response is calculated as described in Chap. 10 in UFC 3-340-01. The supports should be very stiff against in-plane forces so that they cause material crushing as the wall or slab rotates at the supports under lateral load. Typically, this can be achieved by symmetry for a beam/column that is continuous over its supports. Otherwise, compression membrane effects should not be included. The resistance deflection curve is similar to that shown in the portion of Figure 20 for flexural and compression membrane response. |
| Flexural and Tension Membrane Response | <ul style="list-style-type: none"> See above discussion for flexural response. An equivalent elastic stiffness (K_E in Figure 19) is used for flexural response. Tension membrane response is calculated as described in Chapter 10 in UFC 3-340-01. Tension membrane response should only be based on unspliced, continuous steel along at least one face of the component. Boundary conditions must be rigid supports that resist inward movement of the supports. Otherwise, tension membrane effects should not be included. The resistance deflection curve is similar to that shown in Figure 20 for flexural and tension membrane response. |
| Flexural, Compression and Tension Membrane Response | <ul style="list-style-type: none"> See above for flexural, compression and tension membrane response. The resistance deflection curve is based on Chapter 10 in UFC 3-340-01 and is similar to that shown in Figure 20. Due to limited number of stiffnesses, there is no rebound tension membrane stiffness in SBEDS for flexure with compression and tension membrane. |
| Type of Cross Section | <ul style="list-style-type: none"> For a Type I cross section, the entire dynamic response is calculated assuming the compression force of the resisting moment is provided by the concrete at all maximum moment regions - even at large support rotations. A Type I cross section should always be assumed if there is no compression face reinforcing steel. For a Type II cross section, the dynamic response is calculated assuming a Type I cross section at all maximum moment regions up to a support rotation of 2 degrees, and a Type II cross section at larger support rotations. The compression force of the resisting moment is provided by the reinforcing steel at the compression face in a Type II cross section. This only affects the ultimate resistance of the equivalent SDOF system. SBEDS transitions to a Type II cross section over a support rotation of 0.2 degrees (i.e. between 2 and 2.2 degrees). The user can see this effect on the resistance-deflection curve shown on the Input worksheet. See Figure 21 for a comparison of Type I and Type II cross sections. According to UFC 3-340-01 and TM 5-1300, a Type I cross section is only applicable up to 2 degrees of support rotation. However, available test data indicates that this assumption is conservative, except possibly at very high steel reinforcing ratios as discussed in the SBEDS Methodology Manual. If the calculated support rotation exceeds 2 degrees for a Type II cross section, SBEDS provides a warning message that stirrups are required to provide lateral support for compression reinforcing steel in all maximum moment regions. |


| Item | Explanation |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reinforcing Steel Areas | <ul style="list-style-type: none"> See Figure 22 for definition of terms used for input of reinforcing steel areas SBEDS assumes that the lesser of the areas of steel input for inbound and rebound steel (see Figure 22) in negative and positive moment regions are continuous and unspliced along that face for any tension membrane calculations. |
| Distance of Cover to Center of Bars | <ul style="list-style-type: none"> See Figure 22 for definition of terms used for input cover distance (d_c) over reinforcing bars. |
| Loaded Area Factor, A_F | <ul style="list-style-type: none"> Ratio of [blast loaded area on component] to [component spacing*span]. $A_F = 1$ for any uniformly distributed blast load, $A_F \leq 1$ for concentrated loads where attached components transfer load from area that does not include full span. See Figure 24 for example case where $A_F = 0.5$. Stiffness and resistance values are based on a blast loaded area = $A_F BL$. Mass calculations are unaffected by A_F since supported mass per unit loaded area is input directly and the self-weight mass is independent of A_F. |
| Supported Weight | <ul style="list-style-type: none"> Input the supported weight that moves through same deflection as component. This equals the total supported weight for closely spaced beams (up to approximately 7 ft). Conservatively, 20% of the supported weight over total tributary area can be input for beams or columns at further spacing. |
| Concrete Static Strength Increase Factor | <ul style="list-style-type: none"> This is ratio of the actual expected concrete strength to the minimum specified strength. UFC 3-340-01 recommends a static increase factor of 1.1, unless available test data indicates otherwise, and an aging factor of 1.1 for concrete aged at least 6 months or 1.15 for concrete aged at least 1 year. These two increase factors may be combined for a maximum input static increase factor of 1.26. Conservatively, no static increase factor is recommended in TM 5-1300. This factor can also be referred to as an average strength factor (ASF). |
| Concrete Dynamic Strength Increase Factor | <ul style="list-style-type: none"> This is ratio of the dynamic concrete strength including strain-rate effects to the expected static strength. TM 5-1300 recommends a value of 1.19 for far range loading and 1.23 for close-in loading (i.e. scaled standoff $< 3 \text{ ft/lb}^{1/3}$). See UFC 3-340-01, Chapter 4 for more detailed information on the concrete dynamic increase factor as a function of strain-rate. The concrete strain-rate to yield is reported on the <i>Results</i> sheet based on a yield strain of 0.002. |
| Reinforcing Steel Yield Strength Dynamic and Static Strength Increase Factors | <ul style="list-style-type: none"> Default values of 1.1 for the static increase factor (this can also be referred to as an average strength factor (ASF)) and 1.17 for the dynamic increase factor are used in SBEDS as recommended in TM 5-1300. See UFC 3-340-01 Chapter 4 for more detailed information as a dynamic increase factor as a function of strain-rate. The steel strain-rate to yield is reported on the <i>Results</i> sheet. The increase factors can be modified using the "User Defined" input for the steel. |
| Moment Capacity | <ul style="list-style-type: none"> The moment capacities are modified for the effects of input axial load, P_{axial}, as described in TM 5-855-1, Chapter 10.6 based on the interaction diagram shown in Figure 23, except that straight lines are conservatively assumed between M_o, (P_b, M_b), and P_{d0}. Symmetrical column steel at both faces is assumed equal to the average of the input inbound negative and positive steel areas. The slope of the tension-controlled section of the interaction diagram is based on M_o for the larger of the inbound positive and negative moment capacities, which is accurate for the larger moment capacity and conservative for the smaller moment capacity. The compressive axial load includes only the input static axial load and not any input dynamic axial load because axial load almost always increases the moment capacity and the dynamic axial load may not be in phase with maximum flexural response of the column. |

| Item | Explanation |
|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <ul style="list-style-type: none"> SBEDS calculates all moment capacities based only on the input tension reinforcing steel. There is no consideration of reinforcing steel input for the opposite face of the member. |
| Moment of Inertia | <ul style="list-style-type: none"> I is calculated as average of cracked and uncracked moment of inertia according to Eq. 10-31 in UFC 3-340-01 and Figure 10-5 for a singly reinforced cross section to determine the cracked section coefficient, F, for $I_{cracked}$. This is slightly conservative for a doubly reinforced cross section. |
| Static Axial Load for Compression and P-delta Loading, P (Only for Beam-Columns) | <ul style="list-style-type: none"> User should input static axial load P on beam/column causing compression and P-delta moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on $(P/B+P_{DYN})$*(deflection at each time step) assuming no resisting moment at the supports, at each time step in SDOF calculations. B is the beam/column spacing and P_{DYN} is explained in the next item. w_{equiv} is calculated as shown in Equation 3 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is an approximate approach, especially for two-way spans and one-way spans with fixed boundary conditions. Do not input static load from roof components if also inputting dynamic axial load. See Section 4.4 of SBEDS Methodology Manual for more info. . <p>Note: See Table 7 for comparison of equivalent lateral load method in SBEDS to theory for elastic, essentially static lateral load input in SBEDS with axial load.</p> |
| Dynamic Axial Load for P-delta Loading, P_{DYN} (Only for Beam-Columns) | <ul style="list-style-type: none"> <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with the dynamic reaction load from a supported roof or overhead component. The file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. The last line of input file has -999 followed by a comma and the span length, Ls (inch or mm) of the supported component that applies the dynamic reaction pressure (see Equation 14). SBEDS determines P_{DYN} as shown in Equation 14 and uses it to determine an equivalent P-delta load as shown in Equation 13. See Appendix A for an example of an input dynamic axial load input file. See Section 4.4. of SBEDS Methodology Manual for more discussion. <p>Note: The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then later read this saved file into SBEDS as a dynamic axial load input file on a supporting component.</p> |
| Loaded Width for Dynamic Axial Load, Ba | <ul style="list-style-type: none"> Only applicable for cases with input dynamic axial load Input width along top of component subject to dynamic axial load per unit width (see Equation 13). |
| Equivalent Static Reactions | <ul style="list-style-type: none"> Equivalent static reactions on the <i>Input</i> sheet are based on Table 3-9 in TM 5-1300 and the larger of the inbound and rebound ultimate flexural resistance. These reactions are treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors on the <i>Input</i> sheet are shown on the <i>Results</i> sheet, but are not used to determine maximum equivalent static reactions. The calculated maximum reactions at distance "d" (see row below) from the support is applicable when support is on opposite face of component from blast load. |

| Item | Explanation |
|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shear Strength Calculations | <ul style="list-style-type: none"> The direct and diagonal shear strengths are based on Chap. 10 in UFC 3-340-01, except no DIF for concrete in tension is used for the diagonal shear strength. However, the concrete compression strength used in the diagonal shear strength calculations includes the effects of the static and dynamic increase factors. No effects of axial compression or tension on shear strength are included, these should be added if they are applicable as described in UFC 3-340-01, Chapter 10.3. It is conservative to ignore axial compression. Required stirrup area is calculated if diagonal shear strength is less than equivalent static reactions. Calculated stirrup areas include steel static and dynamic increase factors. The distance “d” used in SBEDS for shear calculations is equal to (thickness – applicable concrete cover), where the cover is the cover depth to the top layer of reinforcing steel at the supports of one-way spans, except for a simply support span where it is the cover depth to bottom steel at midspan. For two way spans, the above approach is used except the depths in both span directions are averaged. If the two-way span is fixed on two opposite sides and simply supported on two opposite sides, then it is the cover depth to the top steel only in the direction of the fixed span. This is summarized in Table 10. |
| Response Criteria for Columns | <p>The response criteria for the subcategory “Columns with Shear Failure” is meant to be applied with shear controlled response in SBEDS, where the maximum resistance is based on shear capacity of the column (i.e., the shear flag and message stating that shear controls component response is displayed by SBEDS). The other response criteria subcategories for columns are meant to be applied if flexure controls the ultimate resistance of the column.</p> |
| Rerunning SDOF Calculations for Shear Controlled Components | <p>Sufficient stirrups are normally provided so that beams are not actually controlled by shear. Therefore, no automatic option is provided in SBEDS for rerunning reinforced concrete beams or columns using a shear controlled capacity based on concrete strength only. However, for the case where a beam/column does not have sufficient stirrups and the shear capacity is less than the flexural capacity, the user can reanalyze the beam using the General SDOF Analysis option where an ultimate resistance based on shear (R_{u_shear}), as shown in Equation 15, is substituted for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. Otherwise all mass, stiffness, and resistance shown for the beam/column in the SDOF Properties section of the <i>Input</i> sheet can be input into appropriate input cells in the General SDOF Analysis input sheet.</p> |
| ReRunning SDOF with Resistance Controlled by Shear Capacity (Shear Flag) | <ul style="list-style-type: none"> Sufficient stirrups are normally provided so that beams are not actually controlled by shear. Therefore, no automatic option is provided in SBEDS for rerunning reinforced concrete beams or columns using a shear controlled capacity based on concrete strength only. However, for the case where a beam/column does not have sufficient stirrups and the shear capacity is less than the flexural capacity, the user can reanalyze the beam using the General SDOF Analysis option where an ultimate resistance based on shear (R_{u_shear}), as shown in Equation 15, is substituted for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. Otherwise all mass, stiffness, and resistance shown for the beam/column in the SDOF Properties section of the <i>Input</i> sheet can be input into appropriate input cells in the General SDOF Analysis input sheet. SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response. |
| All Other Items | <p>Return to top of document and link to Help on General Input and Output Items Including Blast Load</p> |

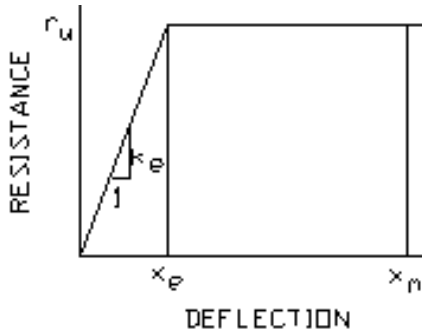

Determinate Boundary Conditions

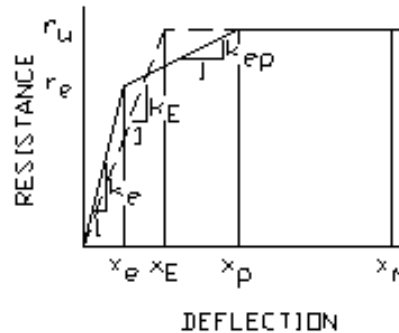


Indeterminate Boundary Conditions

(Solid Curve Used for Flexure Only)

(Dashed Curve for Flexure and Tension Membrane)

Figure 19. Resistance-Deflection Curve For Flexural Response

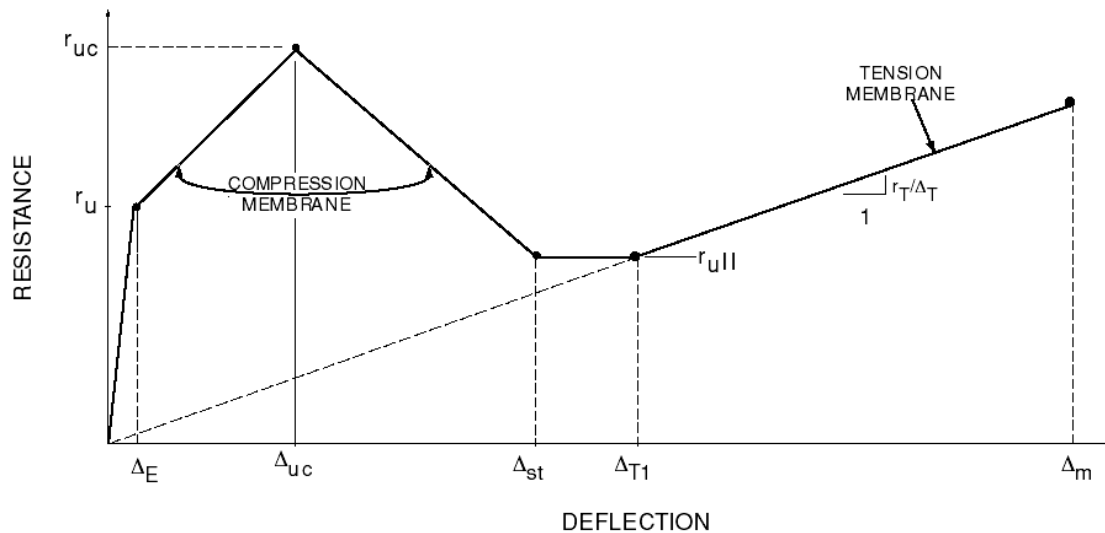

- r_{uc} = COMPRESSIVE MEMBRANE ULTIMATE RESISTANCE TO UNIFORM LOAD (PARAGRAPH 10.4.2)
- Δ_{uc} = CENTRAL DEFLECTION OCCURRING AT r_{uc} (PARAGRAPH 10.4.2)
- r_{uII} = FLEXURAL RESISTANCE USING TYPE II ULTIMATE MOMENT CAPACITY (PARAGRAPHS 10.3.3.2 AND 10.9.1)
- r_T/Δ_T = TENSILE MEMBRANE RESISTANCE/CENTRAL DEFLECTION (PARAGRAPH 10.4.3)
- Δ_m = MAXIMUM CENTRAL DEFLECTION, CORRESPONDING TO DESIGN RESPONSE LIMIT (PARAGRAPH 10.10)

- Δ_{st} = CENTRAL DEFLECTION AT SNAP-THROUGH (PARAGRAPH 10.4.2)
- Δ_{T1} = CENTRAL DEFLECTION WHERE TENSILE MEMBRANE SLOPE THROUGH ORIGIN REACHES r_{uII} (BUT $\Delta_{T1} \geq \Delta_{st}$)
- r_u = ULTIMATE FLEXURAL RESISTANCE TO UNIFORM LOAD (PARAGRAPH 10.9.1)
- Δ_E = EQUIVALENT ELASTIC DEFLECTION IN FLEXURE (PARAGRAPH 10.9.1)

Figure 20. Resistance-Deflection Curve for Reinforced Concrete Components with Compression and Tension Membrane (from UFC 3-340-01)


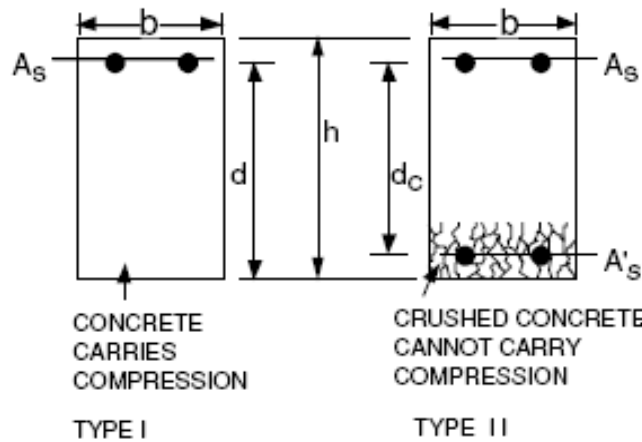


Figure 21. Type I and Type II Cross Sections

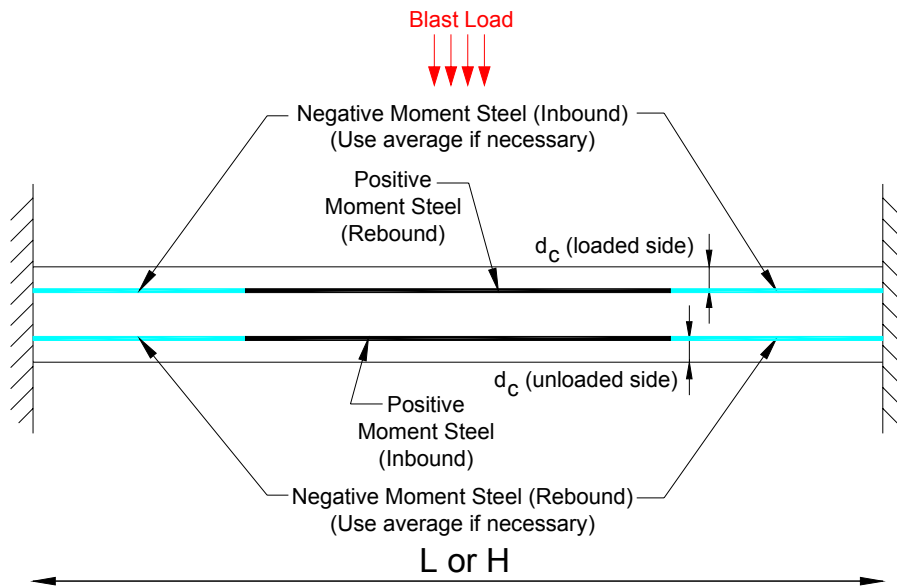

Note: Averaging is necessary for cases with unequal steel - SBEDS allows only one input for this steel.

Figure 22. Information for Input of Steel Area and Distance of Cover Depth (d_c)


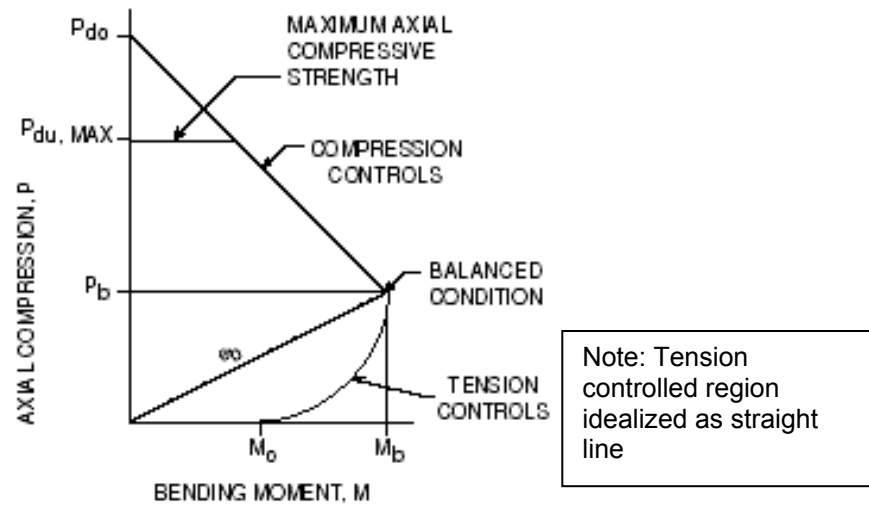


Figure 23. Reinforced Concrete Column Axial Load Moment Capacity Interaction Diagram

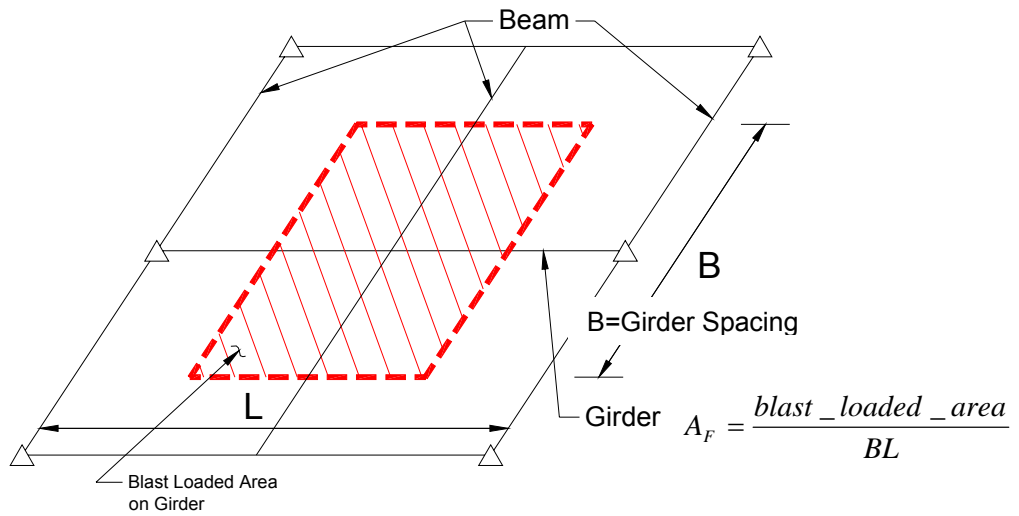

Note that beams only transfer blast load from 50% of the area $B \cdot L$ into girder in this example where the beams have a pinned connection to girders. The blast load from the rest of this area is transferred by beams directly into columns supporting girder.

Figure 24. Example of Girder with Loaded Area Factor (A_F) of 0.5

$$w_{equiv} = W_F \left(\frac{P}{B_L} + P_{DYN}(t) \frac{B_a}{B_L} \right) \Delta(t)$$

$$W_F = \frac{K}{L^2} C$$

Note: $W_F = 0$ when $\frac{L}{\sqrt{\frac{I_{avg}}{A}}} < 22$ for concrete and masonry components

Equation 13

- where:
- $w_{equiv}(t)$ = equivalent lateral load with same spatial distribution as blast load causing P-delta moments in component (added to applied blast load)
 - W_F = equivalent P-delta load factor
 - K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
= 4 for component supported top and bottom with concentrated midspan load
= 2 for uniform load component supported at bottom of axially loaded span
 - C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 $C = 0.64$ for all two-way spans (this is conservative in some cases)
 $C = 1.0$ for all one-way spans
 - L = span length (in direction of axial load for 2-way spanning components)
 - P = total static axial load on component
 - $P_{DYN}(t)$ = dynamic axial load per unit width from supported component (usually the dynamic reaction force from a supported component along its support)
 - $\Delta(t)$ = displacement of SDOF system at each time step
 - I_{avg} = average of gross and cracked moment of inertia
 - A = cross sectional area
 - B_a = loaded width of analyzed component subject to dynamic axial load
 - B_L = blast loaded width of analyzed component

$$P_{DYN}(t) = V(t)L_s$$

Equation 14

where: P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
 $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers) as explained in Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
 L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
 (Example: $L_s = 60$ in for a 10 ft simply supported or fixed-simple beam.
 $L_s = 120$ in for axial load 20 ft high wall slab)

$$R_{u_shear} = \frac{V_s K_d}{K_L LB} \quad K_d = \frac{K_L L - d}{K_L L}$$

Equation 15

where: R_{u_shear} = Ultimate resistance of component per unit loaded area based on shear capacity
 V_s = Dynamic shear capacity in units of force including contribution from any stirrups
 $K_L L$ = Ratio K_L of span L causing highest shear force at supports based on boundary conditions (Example: $K_L=0.5$ for simply supported beam, $K_L=0.625$ for beam with simple-fixed supports)
 B = Width of blast loaded area supported by beam
 d = Distance from blast loaded face to reinforcing steel on opposite face
 K_d = Factor applicable when shear is controlled at distance d from support, which generally occurs when supports on are opposite side of slab from blast load.

Note: Use $K_d=1.0$ when critical shear section is at support.

Table 10. Depth to Reinforcing Steel Used by SBEDS for Shear Strength Calculations

| Boundary Condition | Depth (d) Used for Shear Strength Calculations |
|----------------------------------------------------|------------------------------------------------|
| One-way, Cantilever | d at support |
| One-way, Fixed-Fixed | d at supports |
| One-way, Fixed-Simple | d at fixed support* |
| One-way, Simple-Simple | d at midspan |
| Two-Way, All Edges Simply Supported | Average d at midspan in both directions |
| Two-Way, All Edges Fixed | Average d at supports in both directions |
| Two-Way, Opposite Edges Fixed and Simply Supported | d at fixed supports * |
| *Highest shear load is at fixed support | |


Prestressed Concrete Beam or Slab

| Item | Explanation |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flexural Response | <ul style="list-style-type: none"> • Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 25. Load-mass, stiffness, and ultimate flexural resistance values for all one-way and two-way components are based on Chapter 3 in TM 5-1300, except as below. • SBEDS calculates all moment capacities based only on the input tension reinforcing steel. There is no consideration of reinforcing steel input for the opposite face of the member. • The elastic resistances for two-way components with fixed supports are based on Table 10-5 in UFC 3-340-01. For components with adjacent fixed supports, the elastic resistance is from only the negative moment capacity acting on the yield line pattern at ultimate resistance. • All ultimate resistances for two-way spanning components are calculated based on TM 5-1300 with a 1.08 increase factor to account for conservative approach in TM 5-1300 where only 2/3 maximum moment capacity is assumed in corners. |
| Input of Cross Sectional Dimensions for Beams | <ul style="list-style-type: none"> • Non-rectangular prestressed beams (i.e. AASHTO bridge beams or T-beams) can be input. It assumed for simplicity that there is no tension flange, which is conservative for the moment of inertia and does not affect the moment capacity. It is assumed that the compression block stays within the beam flange for moment calculations and a warning message is output if this is not the case, but no recalculation of the moment capacity is performed. If this error message occurs, see <i>Beam Compression Block/Flange Thickness Ratio</i> under <i>Calculated Properties</i> on cell D53 of the <i>Input</i> sheet. As long as this ratio is less than approximately 1.25, there is very little error. |
| Reinforcing and Prestressed Steel Areas and Spacing | <ul style="list-style-type: none"> • See Figure 26 for definition of terms used for input of reinforcing steel areas • SBEDS assumes that there is only one layer of prestressed steel that contributes to both and inbound and rebound response. • Input conventional steel areas for the positive and negative moment regions are assumed equal in the L and H directions of a two-way panel in SBEDS, but differences in moment capacity in the two directions can be accounted for by adjusting the input reinforcing steel spacing in each direction. Check calculated positive and negative moments in the L and H directions under <i>Calculated Properties</i>, which include the effects of both prestressed and conventional steel. Input zero prestressed steel to check moment capacity of conventional steel and then reset to correct value. |
| Distance of Cover to Center of Bars | <ul style="list-style-type: none"> • See Figure 26 for definition of terms used for input cover distance (d_c) over reinforcing bars. |
| Supported Weight | <ul style="list-style-type: none"> • Input the supported weight that moves through same deflection as component. This is equal to the total supported weight for panels and closely spaced beams (i.e. up to approximately 7 ft). Conservatively, 20% of the supported weight over total tributary area can be input for beams at further spacing. |
| Concrete Static | <ul style="list-style-type: none"> • This is ratio of the actual expected concrete strength to the minimum |


| Item | Explanation |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Strength Increase Factor | specified strength. UFC 3-340-01 recommends a static increase factor of 1.1, unless available test data indicates otherwise, and an aging factor of 1.1 for concrete aged at least 6 months or 1.15 for concrete aged at least 1 year. These two increase factors may be combined for a maximum input static increase factor of 1.26. Conservatively, no static increase factor is recommended in TM 5-1300. This factor can also be referred to as an average strength factor (ASF). |
| Concrete Dynamic Strength Increase Factor | <ul style="list-style-type: none"> This is ratio of the dynamic concrete strength including strain-rate effects to the expected static strength. TM 5-1300 recommends a value of 1.19 for far range loading and 1.23 for close-in loading (i.e. scaled standoff < 3 ft/lb^{1/3}). See UFC 3-340-01, Chapter 4 for more detailed information on the concrete dynamic increase factor as a function of strain-rate. The concrete strain-rate to first yield on <i>Results</i> sheet is based on a 0.002 yield strain. |
| Dynamic and Static Strength Increase Factors for Reinforcing Steel | <ul style="list-style-type: none"> For conventional reinforcing steel, default values of 1.1 for the static increase factor (this factor can also be referred to as an average strength factor (ASF)) and 1.17 for the dynamic increase factor are used as recommended in TM 5-1300. See UFC 3-340-01 Chapter 4 for more detailed information as a dynamic increase factor as a function of strain-rate. The steel strain-rate to yield is reported on the <i>Results</i> sheet. The increase factors can be modified using the “User Defined” input for the reinforcing steel. No increase factors are assumed for prestressed steel since these factors are typically very near 1.0 for steel with high yield strengths. |
| Prestressed Steel Yield Strength | <ul style="list-style-type: none"> The yield strengths for bonded and unbonded prestressed steel are calculated from the input ultimate strength, concrete strength, and steel ratios as recommended in Chapter 6, Section 13 of TM 5-1300. This method is related to similar formulas in ACI 318 with dynamic yield strengths for concrete and reinforcing steel. |
| Moment Capacity | <ul style="list-style-type: none"> The moment capacities are the sum of the ultimate dynamic moment capacities from both conventional and prestressed reinforcing steel as recommended in Chapter 6 of TM 5-1300. See <i>Input of Cross Sectional Dimensions for Beams</i> on preceding page for note on flanged beams. |
| Moments of Inertia | <ul style="list-style-type: none"> The gross moment of inertia is calculated in the conventional manner except that any tension flange is ignored in flanged beams. See <i>Input of Cross Sectional Dimensions for Beams</i> for more information. The cracked moment of inertia is calculated as recommended for prestressed components in Chapter 6 of TM 5-1300. The average of the cracked and gross moments of inertia are used to calculate the beam or slab stiffness for dynamic response calculations. |
| Equivalent Static Reactions | <ul style="list-style-type: none"> Equivalent static reactions on the Input sheet are based on Table 3-9 and Table 3-10 in TM 5-1300 using the ultimate flexural resistance. These reactions are treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors on the <i>Input</i> sheet are shown on the “Results” sheet, but are not used to calculate Peak Equivalent Static Reactions. The calculated maximum reactions at distance “d” from the support is applicable when support is on opposite face of component from blast load. For two-way components, the support reactions are multiplied by $(L'-d)/L'$, where L' is the shortest distance between the support and point of maximum deflection in the yield line pattern for the given direction. <i>This is simplified, conservative value for two-way components (see Table 4.7 in TM 5-1300 for more exact values).</i> |
| Shear Strength | <ul style="list-style-type: none"> The direct and diagonal shear strengths are based on Chap. 10 in UFC 3- |

| Item | Explanation |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Calculations | <p>340-01, except no DIF for concrete in tension is used for the diagonal shear strength. However, the concrete compression strength used in the diagonal shear strength calculations includes the effects of the static and dynamic increase factors. No effects of axial compression or tension on shear strength are included, these should be added if they are applicable as described in UFC 3-340-01, Chapter 10.3. It is conservative to ignore axial compression. Required stirrup area is calculated if diagonal shear strength is less than equivalent static reactions. Calculated stirrup areas include steel static and dynamic increase factors.</p> <ul style="list-style-type: none"> • Required stirrup area is calculated if diagonal shear strength is less than equivalent static reactions. Stirrup calculations include steel static and dynamic increase factors. • The distance “d” used in SBEDS for shear calculations is equal to (thickness – applicable concrete cover), where the cover is the cover depth to the top layer of reinforcing steel (i.e., prestressed or conventional steel, whichever is closer to the surface) at the supports of one-way spans, except for a simply support span where it is the cover depth to bottom steel at midspan. For two way spans, the above approach is used except the depths in both span directions are averaged. If the two-way span is fixed on two opposite sides and simply supported on two opposite sides, then it is the cover depth to the top steel only in the direction of the fixed span. This is summarized in Table 11. • The shear reinforcing steel area shown in SBEDS for slabs, which has units of in^2/in^2, is multiplied by the stirrup spacing in each direction to get a stirrup area. |
| Rerunning SDOF Calculations for Shear Controlled Components (Shear Flag) | <ul style="list-style-type: none"> • <u>For prestressed slabs only</u>, if the diagonal concrete shear capacity $V_c < \text{Peak Equivalent Static Reactions}$, SBEDS provides a user option to recalculate dynamic response using R_{u_shear} from Equation 16 for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. The user must enter a value of 1 (max shear stress at supports) or 2 (max shear stress at distance “d” from supports) in the Shear Flag input cell created by SBEDS to rerun SBEDS with maximum resistances of R_{u_shear} where $R_i > R_{u_shear}$. Resistances based on compression membrane, tension membrane, and arching are not affected. The Error Message area on the Input Sheet provides directions for rerunning the SDOF analysis using R_{u_shear}. This option should only be used if sufficient stirrups are not provided. • <u>For prestressed beams</u>, sufficient stirrups are normally provided so that the component is not actually controlled by shear. Therefore, no shear controlled option for prestressed beams is provided in SBEDS. However, for the case where a beam does not have sufficient stirrups and the shear capacity is less than the flexural capacity, the user can reanalyze the beam using the General SDOF Analysis component type where an ultimate resistance based on shear (R_{u_shear}), as shown in Equation 16, is substituted for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. Otherwise all mass, stiffness, and resistance shown in the SDOF Properties section of the <i>Input</i> sheet for the prestressed beam can be input the General SDOF Analysis <i>Input</i> sheet. • Note that the Peak Equivalent Static Reactions in SBEDS are based on the ultimate flexural resistance (R_u), not the maximum calculated resistance (R_{max}) from the SDOF analysis. If the shear flag is calculated for a case where $R_{max} < R_u$, the actual reactions may not exceed the shear strength as displayed by SBEDS in a message box. • DoD design methods may require that the component shear capacity, |

| Item | Explanation |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | $V_s \geq$ Peak Equivalent Static Reactions. In this case, redesign the component and do not use the shear flag. <ul style="list-style-type: none"> Use of the shear flag is generally recommended for analysis of existing components. HOWEVER, SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

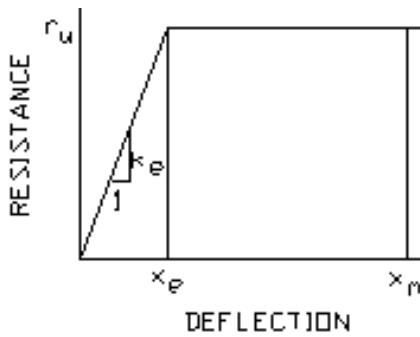


Determinate Boundary Conditions

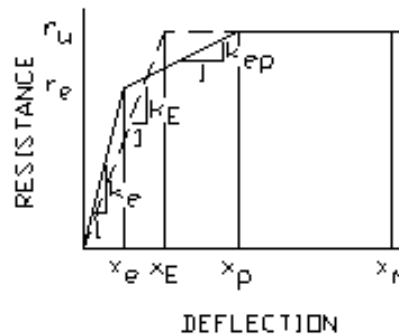

Indeterminate Boundary Conditions

(Solid Curve Used for Flexure Only)
(Dashed Curve is used to calculate ductility ratio)

Figure 25. Resistance-Deflection Curve For Flexural Response

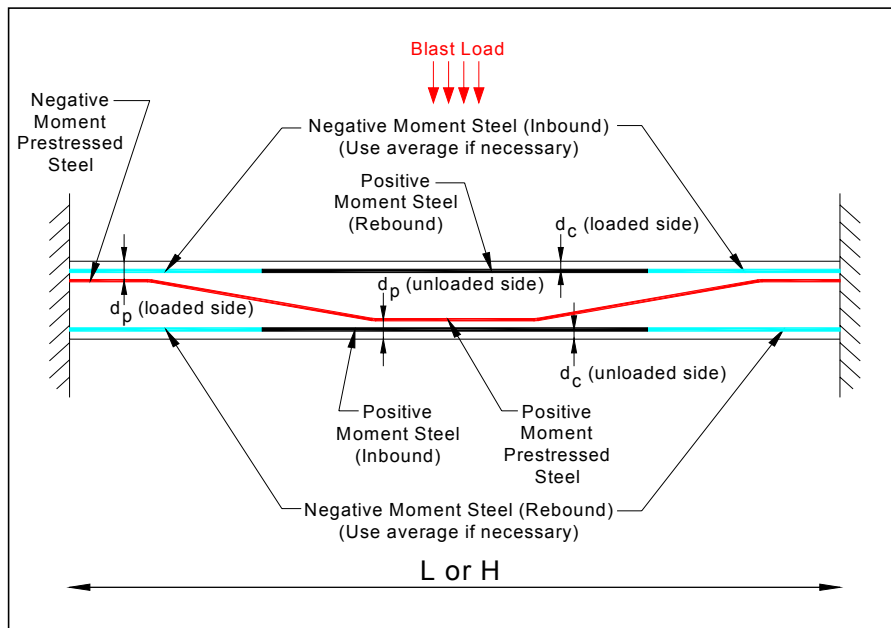

Note: Averaging is necessary for cases with unequal steel since SBEDS allows one input for these steel

Figure 26. Information for Input of Conventional and Prestressing Steel Areas and Distance of Cover Depth

$$R_{u_shear} = \frac{V_s K_d}{K_L L} \quad K_d = \frac{K_L L - d}{K_L L} \quad \text{for slabs}$$

$$R_{u_shear} = \frac{V_s K_d}{K_L LB} \quad K_d = \frac{K_L L - d}{K_L L} \quad \text{for beams}$$

Equation 16

- where:
- R_{u_shear} = Ultimate resistance of component per unit loaded area based on shear capacity
 - V_s = Shear capacity in units of force per unit length for slabs based on concrete strength only without benefits of prestressing. (Use shear capacity in units of force including effects of stirrups to calculate R_{u_shear} for beams.)
 - $K_L L$ = Ratio K_L of span L causing highest shear force at supports based on boundary conditions (Note: $K_L=0.5$ for simply supported beam, $K_L=0.625$ for beam with simple-fixed supports, K_L conservatively based on shortest distance from maximum deflection to support in yield line pattern – see Table 4-7 in TM5-1300 for more exact calculation of shear at distance d from supports of two way spanning components)
 - B = Width of blast loaded area supported by beam
 - d = Distance from blast loaded face to reinforcing steel on opposite face (see table above for more explanation)
 - K_d = Factor applicable when shear is controlled at distance d from support, which generally occurs when supports on are opposite side of beam from blast load. **$K_d = 1.0$ when shear is controlled at the support.**

Table 11. Depth to Reinforcing Steel Used by SBEDS for Shear Strength Calculations

| Boundary Condition | Depth (d) Used for Shear Strength Calculations |
|----------------------------------------------------|------------------------------------------------|
| One-way, Cantilever | d at support |
| One-way, Fixed-Fixed | d at supports |
| One-way, Fixed-Simple | d at fixed support* |
| One-way, Simple-Simple | d at midspan |
| Two-Way, All Edges Simply Supported | Average d at midspan in both directions |
| Two-Way, All Edges Fixed | Average d at supports in both directions |
| Two-Way, Opposite Edges Fixed and Simply Supported | d at fixed supports * |
| *Highest shear load is at fixed support | |


Reinforced Masonry Component Input Information

| Item | Explanation |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Width Resisting Blast Load / Loaded Width; B_w | <ul style="list-style-type: none"> For one-way spanning slabs only, SBEDS allows input of a width resisting blast load that is less than the loaded width. Therefore, $0 < B_w \leq 1.0$. This is particularly applicable for analyzing the wall area between windows, where B_w would equal the (wall width between windows/ center-to-center distance between windows). If $0 < B_w \leq 1$ is not input, SBEDS will give an error message. <i>Input $B_w=1.0$ for the typical case of slab without openings.</i> |
| Flexural Response | <ul style="list-style-type: none"> Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 6. Load-mass, stiffness, and ultimate flexural resistance values for all one-way and two-way components are based on Chapter 3 in TM 5-1300, except as stated below. The moment capacity is based only on the input tension reinforcing steel. SBEDS assumes symmetric steel reinforcement only for the purposes of determining tension reinforcement at negative moment locations and for rebound. The elastic resistances for two-way components with fixed supports are based on Table 10-5 in UFC 3-340-01. For components with adjacent fixed supports, the elastic resistance is from only the negative moment capacity acting on the yield line pattern corresponding to the ultimate resistance. All ultimate resistances for two-way spanning components are calculated based on TM 5-1300 with a 1.08 increase factor to account for conservative approach in TM 5-1300 where only 2/3 maximum moment capacity is assumed in corners. |
| Flexural and Compression Membrane Response | <ul style="list-style-type: none"> See above discussion for flexural response. An equivalent elastic stiffness (K_E in Figure 27) is used for flexural response. For two-way components with fixed boundaries, K_E is based on Equation 3.34 in TM 5-1300 assuming equal positive and negative moment capacities. Compression membrane response is calculated as described in UFC 3-340-01, with no allowance for ungrouted cells of reinforced masonry. This is a somewhat unconservative simplification, but most of the resisting moment from compression membrane comes from the masonry shells at the outer fibers and grouted cells, which are always present in reinforced masonry. Boundary conditions must be as shown in Figure 32. The supports should be very stiff against in-plane forces so that they cause material crushing as the wall or slab rotates at the supports under lateral load. Typically, this can be achieved by symmetry for a wall continuous over supports or by an infill wall built with a tight fit (i.e. no gap) between heavy reinforced concrete framing members. Otherwise, compression membrane effects should be ignored. The resistance deflection curve is similar to that shown in the portion of Figure 28 for flexural and compression membrane response. |
| Flexural and Tension Membrane Response | <ul style="list-style-type: none"> See above discussion for flexural response. An equivalent elastic stiffness (K_E in Figure 27) is used for flexural response. For two-way components with fixed boundaries, K_E is based on Equation 3.34 in TM 5-1300 assuming equal positive and negative moment capacities. Tension membrane response is calculated as described in Chapter 10 in UFC 3-340-01. Tension membrane response should only be based on unspliced, continuous steel along at least one face of the component. Boundary conditions must be as shown in Figure 32. Otherwise, tension membrane effects should not be included. The resistance deflection curve is similar to that shown Figure 28 for flexural and tension membrane response. |
| Flexural, | <ul style="list-style-type: none"> See above discussion for flexural, compression/tension membrane response. |


| Item | Explanation |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compression and Tension Membrane Response | <ul style="list-style-type: none"> The resistance deflection curve is based on Chapter 10 in UFC 3-340-01 and is similar to that shown in Figure 28. There is no rebound tension membrane stiffness for flexural response with compression and tension membrane due to limited number of rebound stiffnesses in SBEDS. |
| Type of Cross Section | <ul style="list-style-type: none"> For a Type I cross section, the entire dynamic response is calculated assuming the compression force of the resisting moment is provided by the masonry at all maximum moment regions - even at large support rotations. A Type I cross section should always be assumed if there is no compression face reinforcing steel. For a Type II cross section, the dynamic response is calculated assuming a Type I cross section at all maximum moment regions up to a support rotation of 2 degrees, and a Type II cross section at larger support rotations. The compression force of the resisting moment is provided by the reinforcing steel at the compression face in a Type II cross section. This only affects the ultimate resistance of the equivalent SDOF system. SBEDS transitions to a Type II cross section over a support rotation of 0.2 degrees (i.e. between 2 and 2.2 degrees). The user can see this effect on the resistance-deflection curve shown on the Input worksheet. See Figure 29 for a comparison of Type I and Type II cross sections. According to UFC 3-340-01 and TM 5-1300, a Type I cross section is only applicable up to 2 degrees of support rotation. However, available test data indicates that this assumption is conservative, except possibly at very high steel reinforcing ratios as discussed in the SBEDS Methodology Manual. If the calculated support rotation exceeds 2 degrees for a Type II cross section, SBEDS provides a warning message that stirrups are required to provide lateral support for compression reinforcing steel in all maximum moment regions. |
| Reinforcing Steel Areas | <ul style="list-style-type: none"> See Figure 30 for definition of terms used for input of reinforcing steel areas SBEDS assumes that the lesser area of steel input for inbound and rebound steel in the positive and negative moment regions (see Figure 30) at each face is continuous and unspliced along that face for any calculations related to tension membrane response. |
| Cover Distance to Center of Bars | <ul style="list-style-type: none"> See Figure 30 for definition of terms used for input cover distance (d_c) over reinforcing bars. |
| Masonry Type | <ul style="list-style-type: none"> See Table 12 and Table 13 for assumptions for each available masonry type. The user can also choose the User Defined option. The User Defined option requires input of "Percent Solid Through Webs" (see Figure 31 for definition), which is used for masonry shear strength calculations. |
| Static Compressive Strength, f'_m | <ul style="list-style-type: none"> Input masonry prism strength. If no measured values are available, see conservative recommended values in Table 14 from TM 5-1300. |
| Dynamic Compr. Increase Factor (DIF) | <ul style="list-style-type: none"> This is ratio of the dynamic masonry strength including strain-rate effects to the static strength. A value of 1.19 is recommended in TM 5-1300. |
| Reinforcing Steel Yield Strength Dynamic and Static Strength Increase Factors | <ul style="list-style-type: none"> Default values of 1.1 for the static increase factor (this can also be referred to as an average strength factor (ASF)) and 1.17 for the dynamic increase factor are used in SBEDS, as recommended in TM 5-1300. See UFC 3-340-01 Chapter 4 for more detailed information as a dynamic increase factor as a function of strain-rate. The steel strain-rate to yield is reported on the <i>Results</i> sheet. These increase factors can be modified using the "User Defined" input for the reinforcing steel. |
| Moment of Inertia | <ul style="list-style-type: none"> I is calculated as the average of the gross and cracked moment of inertias |

| Item | Explanation |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (I) | using Equation 6-6 in TM5-1300. Equation 6-7 in TM 5-1300 is used to calculate $I_{cracked}$ for reinforced masonry. |
| Supported Weight | <ul style="list-style-type: none"> Input supported weight that moves through same deflection as component. Do not include wall or slab self-weight. |
| Static Axial Load for P-delta Loading, P' (Only for load bearing walls) | <ul style="list-style-type: none"> User should input static axial load per unit width loaded by blast, P', causing P-delta moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on $(P+P_{DYN}) \times (\text{deflection at each time step})$ assuming no resisting moment at the supports, at each time step in SDOF calculations. w_{equiv} is calculated as shown in Equation 3 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is approximate, especially for two-way spans and one-way spans with fixed boundary conditions. Do not input static or blast load from roof components if also inputting dynamic axial load. Also, see Section 4.4 of SBEDS Methodology Manual. <p>Note: See Table 7 for comparison of equivalent lateral load method in SBEDS to theory where elastic, essentially static lateral load was input in SBEDS with axial load.</p> |
| Dynamic Axial Load for P-delta Loading, P _{DYN} (Only for load bearing walls) | <ul style="list-style-type: none"> <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with dynamic reaction load from a supported roof or overhead component. The load is applied over the blast-loaded width of the analyzed component. The input text file can be modified for cases where the axially loaded width is not equal to the blast loaded width as discussed in Appendix A. The input file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. The last line of input file has -999 followed by a comma and the span length, L_s (inch or mm) of the supported component that applies the dynamic reaction pressures (Equation 18). SBEDS determines P_{DYN} as shown in Equation 18 and uses it to determine an equivalent P-delta load as shown in Equation 17. See Appendix A for an example of an input dynamic axial load input file. See Section 4.4 of SBEDS Methodology Manual for more discussion. <p>Note: The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file into SBEDS later as a dynamic axial load input file on a supporting component..</p> |
| Equivalent Static Reactions | <ul style="list-style-type: none"> Equivalent static reactions on the <i>Input</i> sheet are based on Table 3-9 and Table 3-10 in TM 5-1300 using the larger of the inbound and rebound ultimate flexural resistance. These reactions, which are per unit width over the full blast loaded area, are equivalent static shear loads compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors is shown on the <i>Results</i> sheet, but are not used to determine maximum equivalent static reactions. The calculated maximum reaction at distance "d" from the support is applicable when support is on opposite face of component from blast load. For two-way components, the support reactions are multiplied by $(L'-d)/L'$, where L' is the shortest distance between the support and point of maximum deflection for the given direction and the maximum value is reported. <i>This is a simplified, conservative value (see Table 4.7 in TM 5-1300 for exact values).</i> |

| Item | Explanation |
|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shear Strength Calculations | <ul style="list-style-type: none"> • The diagonal shear strength is based on Chap. 10 in UFC 3-340-01, except no DIF for tension is used and the dynamic masonry prism strength is used in place of the concrete compressive strength. No effects of axial compression or tension on shear strength are included, these should be added if they are applicable as described in UFC 3-340-01, Chapter 10.3. It is conservative to ignore axial compression. • Required stirrup area is calculated if diagonal shear strength is less than equivalent static reactions. Calculated stirrup areas include steel static and dynamic increase factors. • The diagonal masonry shear strength is based on a depth “d” equal to (thickness – applicable masonry cover), where the cover is the cover depth to the top layer of reinforcing steel at the supports of one-way spans, except for a simply support span where it is the cover depth to bottom steel at midspan. For two way spans, the above approach is used except the depths in both span directions are averaged. If the two-way span is fixed on two opposite sides and simply supported on two opposite sides, then it is the cover depth to the top steel only in the direction of the fixed span. This is summarized in Table 15. • SBEDS assumes the entire blast loaded width resists shear at the supports. If openings reduce width of wall resisting shear, multiply shear capacity by Bw and manually check shear. • The shear reinforcing steel area shown in SBEDS for slabs, which has units of in²/in², is multiplied by the stirrup spacing in each direction to get a stirrup area. |
| Rerunning SDOF Calculations for Shear Controlled Slabs (Shear Flag) | <ul style="list-style-type: none"> • If the diagonal concrete shear capacity $V_c < \text{Peak Equivalent Static Reactions}$, SBEDS provides a user option to recalculate dynamic response using R_{u_shear} from Equation 19 (based only on diagonal concrete shear strength) for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. The user must enter a value of 1 (max shear stress at supports) or 2 (max shear stress at distance “d” from supports) in the Shear Flag input cell created by SBEDS to rerun SBEDS with maximum resistances of R_{u_shear} where $R_i > R_{u_shear}$. Resistances based on compression membrane, tension membrane, and arching are not affected. The Error Message area on the Input Sheet provides directions for rerunning the SDOF analysis using R_{u_shear}. This option should only be used if sufficient stirrups are not provided. • Note that the Peak Equivalent Static Reactions in SBEDS are based on the ultimate flexural resistance (R_u), not the maximum calculated resistance (R_{max}) from the SDOF analysis. If the shear flag is calculated for a case where $R_{max} < R_u$, the actual reactions may not exceed the shear strength as displayed by SBEDS in a message box. • DoD design methods may require that the wall shear capacity $\geq \text{Peak Equivalent Static Reactions}$. In this case, redesign the component and do not use the shear flag. • Use of the shear flag is generally only recommended for analysis of existing components. HOWEVER, SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response. |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

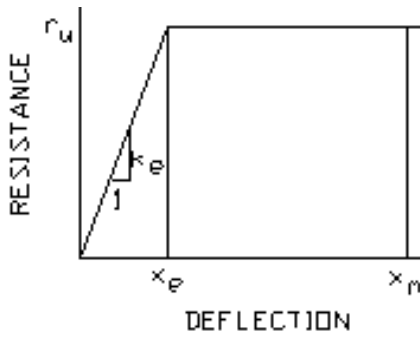

Determinate Boundary Conditions

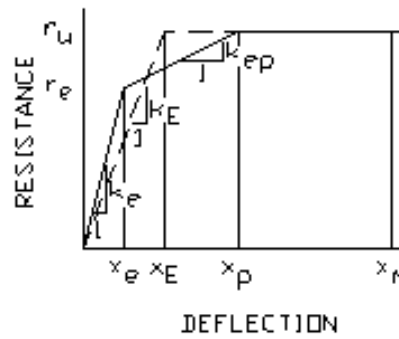


Indeterminate Boundary Conditions

(Solid Curve Used for Flexure Only)

(Dashed Curve for Flexure and Tension Membrane)

Figure 27. Resistance-Deflection Curve For Flexural Response

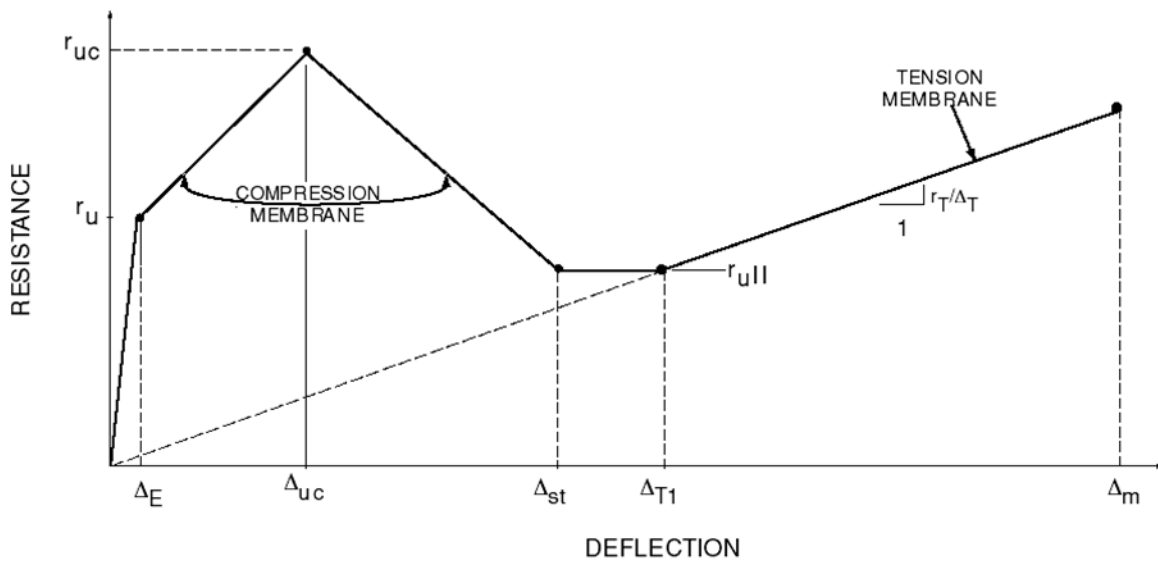

- r_{uc} = COMPRESSIVE MEMBRANE ULTIMATE RESISTANCE TO UNIFORM LOAD (PARAGRAPH 10.4.2)
- Δ_{uc} = CENTRAL DEFLECTION OCCURRING AT r_{uc} (PARAGRAPH 10.4.2)
- r_{uII} = FLEXURAL RESISTANCE USING TYPE II ULTIMATE MOMENT CAPACITY (PARAGRAPHS 10.3.3.2 AND 10.9.1)
- r_T/Δ_T = TENSILE MEMBRANE RESISTANCE/CENTRAL DEFLECTION (PARAGRAPH 10.4.3)
- Δ_m = MAXIMUM CENTRAL DEFLECTION, CORRESPONDING TO DESIGN RESPONSE LIMIT (PARAGRAPH 10.10)

- Δ_{st} = CENTRAL DEFLECTION AT SNAP-THROUGH (PARAGRAPH 10.4.2)
- Δ_{T1} = CENTRAL DEFLECTION WHERE TENSILE MEMBRANE SLOPETHROUGH ORIGIN REACHES r_{uII} (BUT $\Delta_{T1} \geq \Delta_{st}$)
- r_u = ULTIMATE FLEXURAL RESISTANCE TO UNIFORM LOAD (PARAGRAPH 10.9.1)
- Δ_E = EQUIVALENT ELASTIC DEFLECTION IN FLEXURE (PARAGRAPH 10.9.1)

Figure 28. Resistance-Deflection Curve for Reinforced Masonry Components with Compression and Tension Membrane (from UFC 3-340-01)


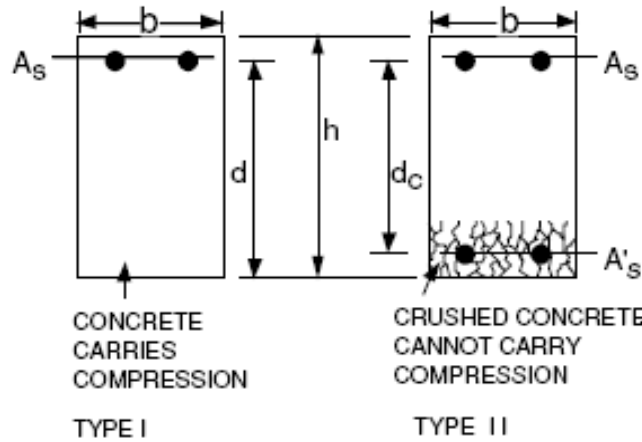


Figure 29. Type I and Type II Cross Sections

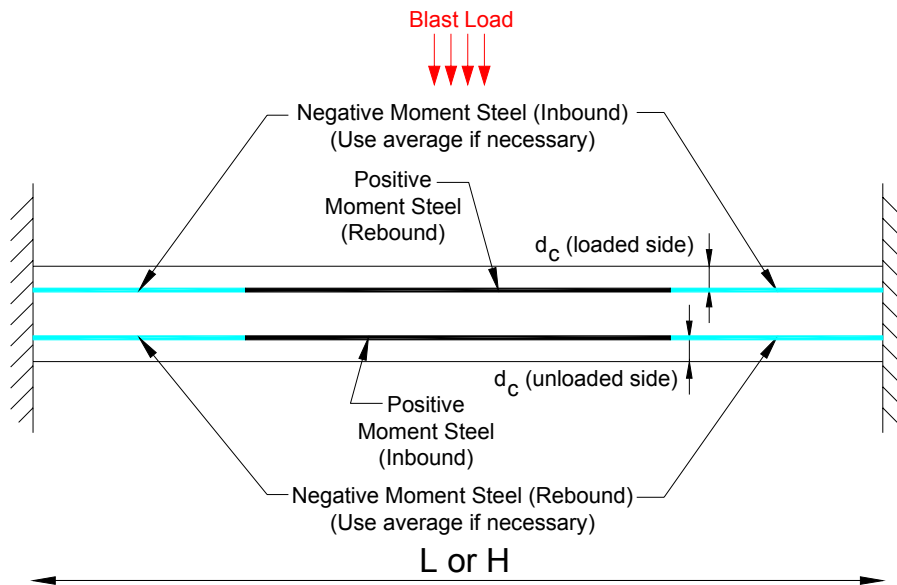

Note: Averaging is necessary for cases with unequal steel - SBEDS allows only one input for this steel.

Figure 30. Information for Input of Steel Area and Distance of Cover Depth (d_c)

$$w_{equiv} = W_F \{P' + P_{DYN}(t)\} \Delta(t)$$

$$W_F = \frac{K}{L^2} C$$

Note: $W_F = 0$ when $\frac{L}{\sqrt{\frac{I_{avg}}{A}}} < 22$ for concrete and masonry components

Equation 17


- where: w_{equiv} = equivalent lateral load with same spatial distribution as blast load causing $P\Delta$ moments in component (added to applied blast load)
- where: w_{equiv} = equivalent lateral load with same spatial distribution as blast load causing $P\Delta$ moments in component (added to applied blast load)
- W_F = equivalent P-delta load factor
- K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
= 4 for component supported top and bottom with concentrated midspan load
= 2 for uniform load component supported at bottom of axially loaded span
- C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 $C = 0.64$ for all two-way spans (this is conservative in some cases)
 $C = 1.0$ for all one-way spans
- L = span length (span in direction causing axial load for 2-way spanning components)
- P' = total static axial load applied over blast loaded width of analyzed component divided by the blast loaded width
- $P_{DYN}(t)$ = dynamic axial load per unit loaded width (usually the dynamic reaction force from a supported component loaded by blast)
- $\Delta(t)$ = maximum component displacement at each time step
- I_{avg} = average of gross and cracked moment of inertia
- A = cross sectional area

$$P_{DYN}(t) = V(t)L_s$$

Equation 18

- where: P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
- $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers) as explained in Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
- L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
(Example: $L_s = 60$ in for a 10 ft simply supported or fixed-simple beam.
 $L_s = 120$ in for axial load 20 ft high wall slab)
- Note: L_s can be modified in the saved file for cases where P_{DYN} is applied

over a width different from the blast loaded width – see Appendix A.

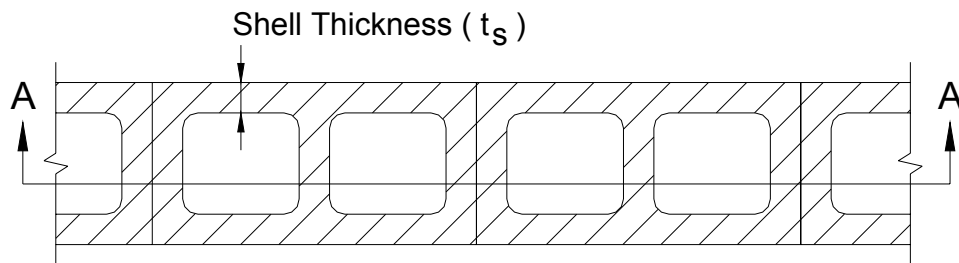

Percent Solid Through Web = 100 x (width of solid space through block along A-A)/(block width)
(Note: Do not include any grout, this is accounted for separately in SBEDS input)

Figure 31. Percent Solid Through Webs for CMU Cross Section

Table 12. Masonry Block Information Assumed In SBEDS

| Type | Density (pcf) | Percentage Solid Cross Section (%) | Percentage Solid Through Webs (%) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------------|-----------------------------------|
| Brick | 120 | 100 | 100 |
| European Insulated Block | 60 – 120* | 50** | 50** |
| Heavy Weight CMU | 135 | See Table 13 | See Table 13 |
| Light Weight CMU | 95 | | |
| Medium Weight CMU | 120 | | |
| <ul style="list-style-type: none"> • 87 pcf assumed in SBEDS calculations – use User Defined option if incorrect. ** An approximate, generally conservative value for blocks shown in Figure 33 | | | |

Table 13. Assumed Cross Sectional Parameters for CMU Blocks

| Block Thickness (in) | Face Shell Thickness (in) | Web Thickness (in) | Percent Solid Cross Section (%) | Percent Solid Through Webs (%) |
|----------------------|---------------------------|--------------------|---------------------------------|--------------------------------|
| 4 | 0.75 | 0.75 | 50 | 14 |
| 6 | 1.25 | 1.0 | 55 | 19 |
| 8 | 1.25 | 1.25 | 49 | 23 |
| 10 | 1.25 | 1.25 | 43 | 23 |
| 12 | 1.25 | 1.25 | 40 | 23 |

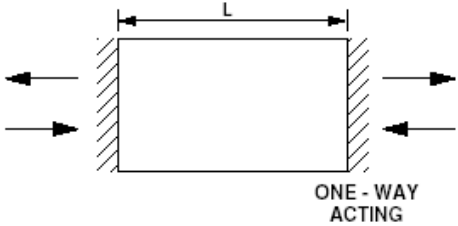
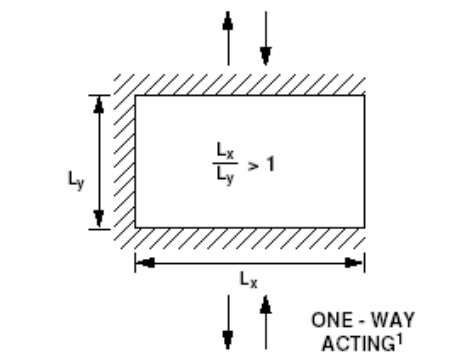
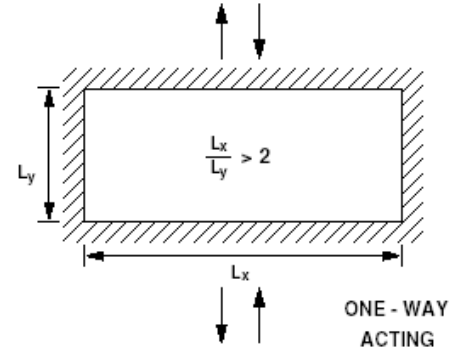
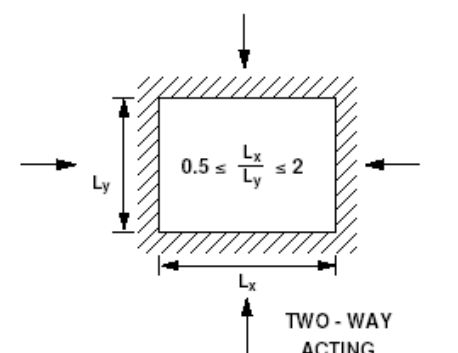
| EDGE SUPPORT CONDITIONS | EXTERNAL LATERAL RESTRAINT REQUIREMENTS |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p style="text-align: center;">ONE - WAY ACTING</p> | <p style="text-align: center;">OPPOSITE EDGES</p> |
|  <p style="text-align: center;">ONE - WAY ACTING¹</p> | <p style="text-align: center;">OPPOSITE EDGES SHORT DIRECTION</p> <p style="text-align: center;">¹AT L_x/L_y NEAR 1.0 TWO-WAY FLEXURE MAY CONTROL OVER ONE-WAY MEMBRANE</p> |
|  <p style="text-align: center;">ONE - WAY ACTING</p> | <p style="text-align: center;">OPPOSITE EDGES SHORT DIRECTION</p> |
|  <p style="text-align: center;">TWO - WAY ACTING</p> | <p style="text-align: center;">ALL EDGES FOR COMPRESSION MEMBRANE (NONE REQUIRED FOR TENSION MEMBRANE)</p> |

Figure 32. Boundary Conditions for Tension and Compression Membrane Response

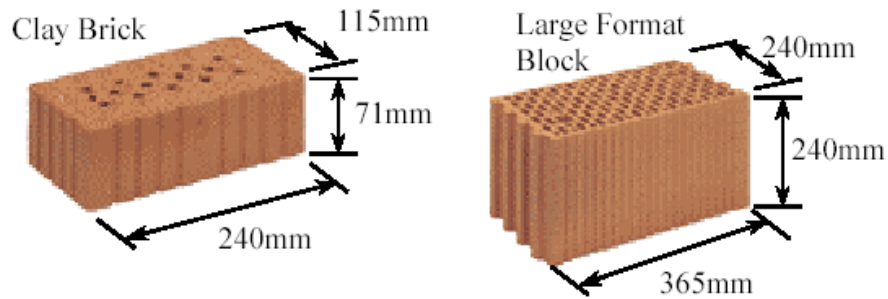


Figure 33. Small and Large European Insulated Blocks

Table 14. Recommended Conservative Values for Compressive Strength

| Type of Masonry Unit | Compressive Strength (f'm)* |
|------------------------|-----------------------------|
| UngROUTED CMU | 1350 psi |
| Fully Grouted CMU | 1500 psi |
| Brick or Solid Masonry | 1800 psi |

*Note: Values of 500 psi or less may be appropriate for old masonry walls (i.e., more than approximately than 50 yrs old). Also, modifications from original construction and structural discontinuities (e.g. bricked-up openings, large bearing plates and lintels, etc.) may affect strength.

$$R_{u_shear} = \frac{V_s K_d}{K_L L}$$

When Shear Flag = 2, $K_d = \frac{K_L L - d}{K_L L}$ When Shear Flag = 1, $K_d = 1$

Equation 19

- where:
- R_{u_shear} = Ultimate resistance of component based on shear capacity per unit loaded area
 - V_s = Shear capacity force per unit width based only on masonry shear strength
 - $K_L L$ = Ratio K_L of span L causing maximum shear force at support based on boundary conditions (Note: $K_L=0.5$ for simply supported beam, $K_L=0.625$ for beam with simple-fixed supports, $K_L L$ conservatively equals the shortest distance from maximum deflection to support in yield line pattern – see Table 4-7 in TM5-1300 for more exact calculation of shear at distance d from supports of two way spanning components)
 - d = distance from blast loaded face to reinforcing steel on opposite face (see discussion in table above)
 - K_d = Factor applicable when shear is controlled at distance d from support, which generally occurs when supports on are opposite side of slab from blast load.

Note: $K_d=1.0$ when shear is controlled at the support.

Table 15. Depth to Reinforcing Steel Used by SBEDS for Shear Strength Calculations


| Boundary Condition | Depth (d) Used for Shear Strength Calculations |
|----------------------------------------------------|-------------------------------------------------------|
| One-way, Cantilever | d at support |
| One-way, Fixed-Fixed | d at supports |
| One-way, Fixed-Simple | d at fixed support* |
| One-way, Simple-Simple | d at midspan |
| Two-Way, All Edges Simply Supported | Average d at midspan in both directions |
| Two-Way, All Edges Fixed | Average d at supports in both directions |
| Two-Way, Opposite Edges Fixed and Simply Supported | d at fixed supports * |
| *Highest shear load is at fixed support | |

Unreinforced Masonry Input Information


| Item | Explanation |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Width Resisting Blast Load / Loaded Width; Bw | <ul style="list-style-type: none"> For one-way spanning slabs only, SBEDS allows input of a width resisting blast load that is less than the loaded width. Therefore, $0 < Bw \leq 1.0$. This is particularly applicable for analyzing the wall area between windows, where Bw would equal the (wall width between windows/ center-to-center distance between windows). If $0 < Bw \leq 1$ is not input, SBEDS will give an error message. <i>Input Bw=1.0 for the typical case of slab without openings.</i> |
| Brittle Flexural Response with Axial Load | <ul style="list-style-type: none"> The response is based on assumptions summarized in Figure 35. The methodology for this response mode is largely based on the WAC computer program. r_1 and r_2 are the initial flexural yield and ultimate flexural resistance. r_3 is calculated based on axial load and self-weight, see Equation 20. Figure 36 shows resistance-deflection curves used in SBEDS for this response mode. Flexural response is only assumed to occur up to the deflection causing ultimate flexural resistance. Arching from axial load controls the resistance at all larger deflections. For two-way spans, arching from axial load is assumed in the shorter span direction since two-way walls are typically wider than they are tall. Otherwise, the axial load can be increased to cause the correct value r_3 in Equation 20. This will cause conservative P-delta calculations, but they are typically not very significant. See comments on flexural response in next row. |
| Elastic-Plastic Flexural Response | <ul style="list-style-type: none"> This approach is not typically recommended because static testing shows that unreinforced masonry walls to not typically exhibit plastic response. It is included only because limited plastic response has been used as an approximate approach for analyzing blast response of unreinforced masonry walls in the past. Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 6. Load-mass, stiffness, and ultimate flexural resistance for all one-way and two-way components are based on TM 5-1300 (Chapter 3), except as stated below. The elastic resistances for two-way components with fixed supports are based on Table 10-5 in UFC 3-340-01. For components with adjacent fixed supports, the elastic resistance is from only the negative moment capacity acting on the yield line pattern corresponding to the ultimate resistance. All ultimate resistances for two-way spanning components are calculated based on TM 5-1300 with a 1.08 increase factor to account for conservative approach in TM 5-1300 where only 2/3 maximum moment capacity is assumed in corners. See calculation of flexural moment capacity below. |
| Rigid Arching (Compression Membrane Response) | <ul style="list-style-type: none"> Flexural response not included, assumed negligible compared to arching. Arching response is calculated as shown in Equation 21 and Equation 22 for one-way and two-way arching, respectively, based on the methodology in Chapter 12 of "Reinforced Concrete Slabs" by Park and Gamble (2000) assuming zero reinforcing steel and allowing for ungrouted masonry voids and a gap between edge of wall and rigid supports. The gap is treated as a "support movement" independent of compression force in the methodology. The resistance deflection curve is similar to that shown in Figure 37. No rebound is calculated for arching if there is an input gap dimension between the wall and support. This causes a very low initial stiffness and the rebound SDOF calculation method in SBEDS is set up for initial stiffness > other stiffnesses. If rebound is critical, another methodology should be used to calculate response. |

| Item | Explanation |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Double Wythe Wall Systems | <ul style="list-style-type: none"> • SBEDS allows input of double wythe walls, where the walls are assumed to deflect together. Both walls must have the same height and/or width dimensions and the same boundary conditions. They can have different cross sectional properties. • The load resisted by each wall in flexural response is based on the relative wall stiffnesses, as recommended in ACI 530-02, Section 2.1.5.3.1. The walls are assumed to act in flexural as two springs in parallel until one of the walls yields, when the two wall system is assumed to achieve maximum flexural resistance. See Equation 23 and Equation 24. • All rigid boundary arching and applied axial load is assumed to act only on the inner wall. The outer wall only contributes to the mass. • Axial load arching includes the summed effect of self-weight load on the outer wall and self-weight plus input axial load on the inner wall. |
| Masonry Type | <ul style="list-style-type: none"> • See Table 16 and Table 17 for assumptions for each available masonry type. The user can also choose the User Defined option. The User Defined option requires input of "Percent Solid Through Webs". See Figure 38 for definition of this variable. |
| Masonry Dynamic Tensile Strength, f_{dt} | <ul style="list-style-type: none"> • Input dynamic tensile strength for flexural response calculations. Recommended input value is $0.1f'_m \geq 200$ psi. |
| Masonry Static Prism Strength, f'_m | <ul style="list-style-type: none"> • Input masonry prism strength. If no measured values are available, see recommended values in Table 14 from TM 5-1300. |
| Masonry Dynamic Increase Factor, DIF | <ul style="list-style-type: none"> • This is the ratio of the dynamic masonry <i>compressive</i> strength, including strain-rate effects, to the static strength. A value of 1.19 is recommended in TM 5-1300. |
| Moment Capacity | <ul style="list-style-type: none"> • The moment capacity for flexural response is $S*(f_{dt} + P_{axial}/A)$, where S=elastic section modulus, A=cross sectional area, f_{dt} and P_{axial} are input values. |
| Axial Load, P_{axial} | <ul style="list-style-type: none"> • User should input axial load only if rigid arching response mode has <u>not</u> been selected. In this case, P_{axial} is used to determine moment capacity and the post-peak resistance for brittle response. The axial load is always applied over the full blast loaded width of one-way slabs regardless of input B_w value defined above. Unlike other components, axial load enhances strength of unreinforced masonry and the resistance generally goes to zero at deflections greater than its thickness. Therefore, P-delta (and thus dynamic axial load) effects are not included. |
| Gap from Edge of Wall to Rigid Support | <ul style="list-style-type: none"> • If arching response mode is selected, input total gap dimension from edges of wall to rigid supports in direction of input arching. This will be sum of gap on both sides for horizontal arching, gap at top of wall for vertical arching, or average of these values for two-way arching. There is often a 0.25 inch to 0.5 inch gap at the edges of masonry walls (usually filled with a flexible material) to allow masonry to expand/contract with temperature change. • In most cases, rigid arching can only be assumed for an in-fill masonry wall built within a substantial reinforced concrete frame or a wall panel that is continuous over its supports. |
| Damping | <ul style="list-style-type: none"> • Small amounts of damping have much more of an affect on unreinforced masonry with brittle flexure and arching from axial load than on other cases. Based on SDOF comparisons to unreinforced masonry data with this response type performed while developing the CEDAW methodology, 2% of critical damping is recommended for this case. |

| Item | Explanation |
|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equivalent Static Reactions | <ul style="list-style-type: none"> Equivalent static reactions on the <i>Input</i> sheet are based on Table 3-9 and Table 3-10 in TM 5-1300 and the ultimate flexural resistance. These reactions are treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors on the <i>Input</i> sheet are shown on the <i>Results</i> sheet. The calculated maximum reaction at distance equal to the wall thickness (t) from the support is applicable when support is on opposite face of component from blast load. For two-way components, the support reactions are multiplied by $(L'-t)/L'$, where L' is the shortest distance between the support and point of maximum deflection for the given direction and the maximum value is reported. <i>This is a simplified, conservative value for two-way components (see Table 4.7 in TM 5-1300 for more exact values).</i> |
| Shear Strength Calculations | <ul style="list-style-type: none"> The diagonal shear strength is based on Chap. 10 in UFC 3-340-01, except no DIF for tension is used and the dynamic masonry prism strength is used in place of the concrete compressive strength. No effects of axial compression or tension on shear strength are included, these should be added if they are applicable as described in UFC 3-340-01, Chapter 10.3. It is conservative to ignore axial compression. The shear area is based only on the solid area through the webs in Figure 38, plus grouted cells. <p>Note: A vertical span is assumed in the shear area calculations. For a horizontal spanning wall, the shear area per unit width is equal to twice the shell thicknesses divided by the wall thickness.</p> |
| Rerunning SDOF Calculations for Shear Controlled Slabs (Shear Flag) | <ul style="list-style-type: none"> If the shear capacity $V_s < \text{Peak Equivalent Static Reactions}$, SBEDS provides a user option to recalculate dynamic response using R_{u_shear} from Equation 25 for all resistances (R_i) based on flexure capacity where $R_i > R_{u_shear}$. The user must enter a value of 1 (max shear stress at supports) or 2 (max shear stress at distance “d” from supports) in the Shear Flag input cell created by SBEDS to rerun SBEDS with maximum resistances of R_{u_shear} where $R_i > R_{u_shear}$. Resistances based on compression membrane, tension membrane, and arching are not affected. The Error Message area on the Input Sheet provides directions for rerunning the SDOF analysis using R_{u_shear}. This option is generally recommended, but there may be cases where the shear capacity is conservatively calculated and the user may elect not to rerun the SDOF calculations. Note that the Peak Equivalent Static Reactions in SBEDS are based on the ultimate flexural resistance (R_u), not the maximum calculated resistance (R_{max}) from the SDOF analysis. If the shear flag is calculated for a case where $R_{max} < R_u$, the actual reactions may not exceed the shear strength as displayed by SBEDS in a message box. DoD design methods may require that the wall shear capacity \geq Peak Equivalent Static Reactions. In this case, redesign the component and do not use the shear flag. Use of the shear flag is generally only recommended for analysis of existing components. HOWEVER, SBEDS only includes response criteria for flexural response. See Section 4.5.2 of the SBEDS Methodology Manual for alternative response criteria for shear-controlled component response. |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

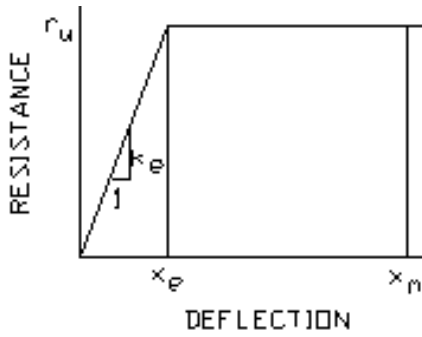


Determinate Boundary Conditions

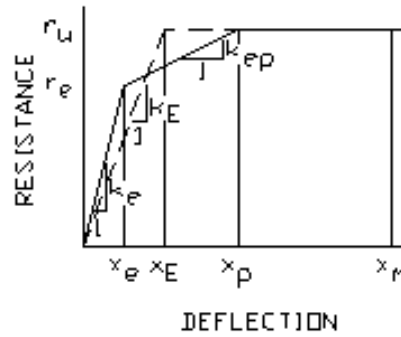

Indeterminate Boundary Conditions
(Solid Curve Used for Flexure Only)
(Dashed Curve is used to calculate ductility ratio)

Figure 34. Resistance-Deflection Curve For Flexural Response

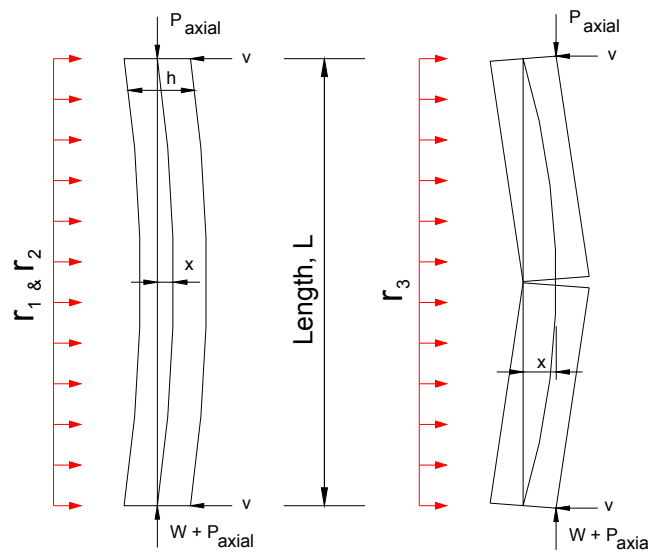

Response prior to ultimate flexural resistance, r_2 Response after r_2 where x = arching moment arm

Figure 35. Response of Brittle Unreinforced Masonry Wall Under Combined Lateral and Axial Load

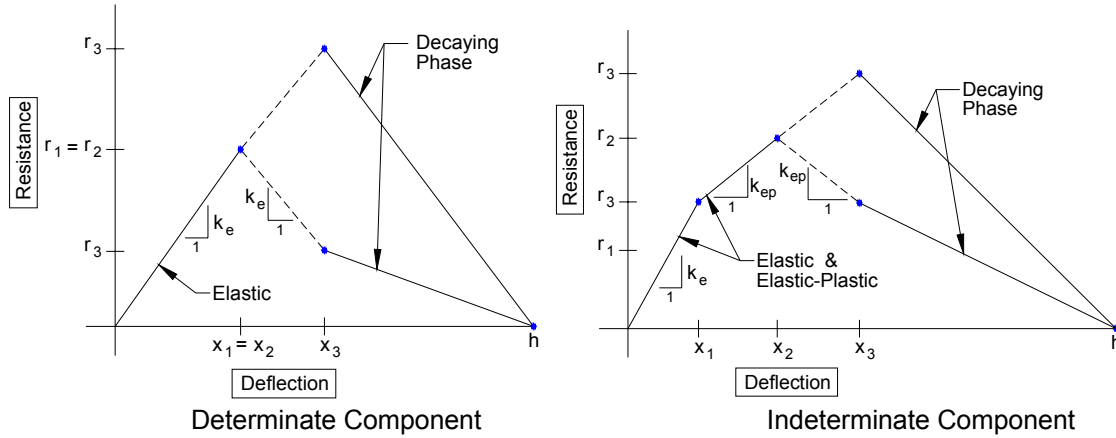


Figure 36. Resistance-Deflection Curves for Unreinforced Masonry with Brittle Flexural Response and Axial Load From WAC Program

$$r_3 = \frac{8}{L^2} (h - x_2) \left(P + \frac{WL}{2} \right)$$

Equation 20

- where:
- r_3 = maximum resistance from axial load effects
 - x_3 = flexural deflection at $r_2 + (r_3 - r_2)/K_{ep}$
 - K_{ep} = elastic-plastic stiffness for indeterminate components, otherwise equal to elastic stiffness
 - h = overall wall thickness
 - P = input axial load per unit width along wall, P_{axial}
 - W = areal self-weight and supported weight of wall
 - L = span length equal to wall height

$$r_{max} = \frac{8}{L^2} \left[2C_1 \left(\frac{h}{2} - \frac{t_s}{2} \right) + 2C_2 \left(\frac{h}{2} - t_s - \frac{(0.85c - t_s)}{2} \right) - (C_1 + C_2) \Delta_m \right]$$

$$c = \frac{h}{2} - \frac{\Delta_m}{2} - \beta L^2 \left(\varepsilon' + \frac{\delta_g}{L} \right) \quad \text{where} \quad \varepsilon' = \varepsilon + \frac{2t}{L}$$

$$C_1 = 0.85 f'_m t_s$$

$$C_2 = 0.85 f'_m k (0.85c - t_s)$$

$$\Delta_m = \text{MIN} \left(\frac{L}{30}, \frac{h}{2} \right) + \Delta_g$$

$$\Delta_g = h - \sqrt{\left(\frac{L}{2} \right)^2 + h^2 - \left(\frac{L + \delta_g}{2} \right)^2}$$

$$\Delta_{st} = \left[\text{MIN}(0.08L, 0.8h) + \Delta_g \right] \leq h$$

Equation 21

where: r_{\max} = maximum one-way rigid arching resistance occurring at Δ_m
 Δ_m = midspan deflection at maximum resistance
 c = compression block depth
 h = overall wall thickness
 ε' = compression strain due to arching forces and support movement strain
 (see Eq. 10-39 in UFC 3-340-01 with no steel forces for calculation of ε')
 t = outward movement of each support caused by arching forces
 (Note: support stiffness assumed equal to $0.2E_m$ per UFC 3-340-01)
 δ_g = gap between edge of wall and rigid supports
 f'_m = masonry compressive prism strength
 t_s = masonry shell thickness (see Figure 31)
 k = solid ratio of masonry through webs (i.e. cross section A-A in Figure 31)
 ($k = 0$ assumed for horizontal span arching if not fully grouted)
 L = span length
 C_1 = compression force per unit width in shell
 C_2 = compression force per unit width in webs
 Δ_g = deflection when corner of wall engages rigid support ($\Delta_g = 0$ if $\delta_g = 0$)
 Δ_{st} = arching snap through deflection causing zero arching resistance
 β = distance from support to yield location divided by span length = 0.5

$$r_{\max} = \frac{24}{L_y(3L_x - L_y)} \left[m'_x + m_x + m'_y + m_y + (m_y + m'_y) \frac{L_x - L_y}{L_y} - \frac{\Delta_m}{2} \left(n_x - n_y + 2n_y \frac{L_x}{L_y} \right) \right]$$

$$m_x = m'_x = C_{1x} \left(\frac{h}{2} - \frac{t_s}{2} \right) + C_{2x} \left(\frac{h}{2} - t_s - \frac{(0.85c_x - t_s)}{2} \right)$$

$$m_y = m'_y = C_{1y} \left(\frac{h}{2} - \frac{t_s}{2} \right) + C_{2y} \left(\frac{h}{2} - t_s - \frac{(0.85c_y - t_s)}{2} \right)$$

$$C_{1x} = C_{2x} = 0.85 f'_m t_s$$

$$C_{2x} = 0.85 f'_m k_x (.85c_x - t_s)$$

$$C_{2y} = 0.85 f'_m k_y (.85c_y - t_s)$$

$$c_x = \frac{h}{2} - \frac{\Delta_m}{2} - \beta L_x^2 \left(\varepsilon' + \frac{\delta_g}{L_x} \right) \quad \text{where} \quad \varepsilon' = \varepsilon + \frac{2t}{L_x}$$

$$c_y = \frac{h}{2} - \frac{\Delta_m}{2} - \beta L_y^2 \left(\varepsilon' + \frac{\delta_g}{L_y} \right) \quad \text{where} \quad \varepsilon' = \varepsilon + \frac{2t}{L_y}$$

$$n_x = C_{1x} + C_{2x}$$

$$n_y = C_{1y} + C_{2y}$$

Equation 22

where: r_{max} = maximum two-way rigid arching resistance occurring at Δ_m
 x = designates long span direction
 y = designates short span direction
 m_i = resisting positive moment from arching per unit width in the i direction
 m'_i = resisting moment at supports from arching per unit width in the i direction
 n_i = compression force from arching per unit width in the i direction
 All other parameters similar to Equation 21 where x and y subscripts refer to long and short directions, respectively
 Note: $\beta(x,y) \leq 0.5$ for two-way component depending on yield line pattern, however, conservatively $\beta = 0.5$ in SBEDS
 Δ_{st} , Δ_m based on short span length and δ_g assumed equal in both directions

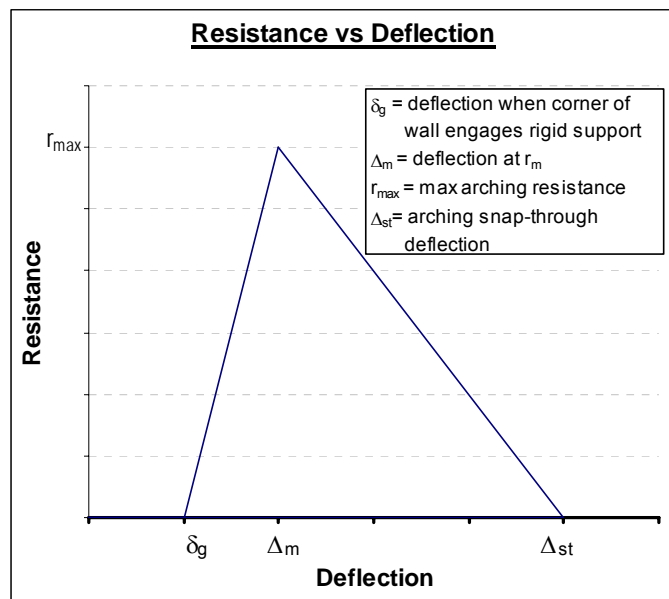


Figure 37. Arching Resistance-Deflection Curve

$$R_1 = K_1 \Delta \quad R_2 = K_2 \Delta \quad \text{therefore} \quad \frac{R_1}{R_2} = \frac{K_1}{K_2} \quad \text{and} \quad K_i \propto \frac{C_K E_i I_i}{L^4} \quad \text{so} \quad \frac{R_1}{R_2} = \frac{K_1}{K_2} = \frac{E_1 I_1}{E_2 I_2}$$

$$R_i \propto \frac{C_m M_i}{L^2} \quad \text{therefore} \quad \frac{R_1}{R_2} = \frac{M_1}{M_2} = \frac{\sigma_1 S_1}{\sigma_2 S_2} \quad \text{and} \quad \frac{\sigma_1}{\sigma_2} = \frac{R_1 S_2}{R_2 S_1} = \frac{E_1 I_1 S_2}{E_2 I_2 S_1} = \sigma_r, \quad \text{Let} \quad \sigma_{ry} = \frac{\sigma_{1y}}{\sigma_{2y}}$$

If $\frac{\sigma_r}{\sigma_{ry}} \geq 1$, Wall 1 yields first and $R_u = R_{1u} + R_2 = R_{1u} \left(1 + \frac{E_2 I_2}{E_1 I_1} \right)$,

Else, $R_u = R_{2u} + R_1 = R_{2u} \left(1 + \frac{E_1 I_1}{E_2 I_2} \right)$ Also, $\text{Max}(R_{1u}, R_{2u}) \leq R_u \leq (R_{1u} + R_{2u})$


Equation 23

$$K = K_1 + K_2$$

Equation 24

where:

- $i = 1$ for inner wall and 2 for outer wall
- R_i = resistance i^{th} wall
- R_{iu} = ultimate or maximum resistance of i^{th} wall
- R_u = ultimate or maximum resistance of two-wall system
- K_i = flexural stiffness of i^{th} wall
- K = flexural stiffness of two-wall system
- E_i = Young's modulus of walls
- I_i = moment of inertia of i^{th} wall
- S_i = section modulus of i^{th} wall
- Δ = equal midspan deflections of both walls
- L = equal spans of both walls
- σ_i = maximum flexural stress in walls
- M_i = maximum moment capacity of i^{th} wall
- σ_{iy} = yield stress of i^{th} wall
- C_m = moment constants dependent on boundary conditions - same for each wall
- C_K = stiffness constants dependent on boundary conditions - same for each wall

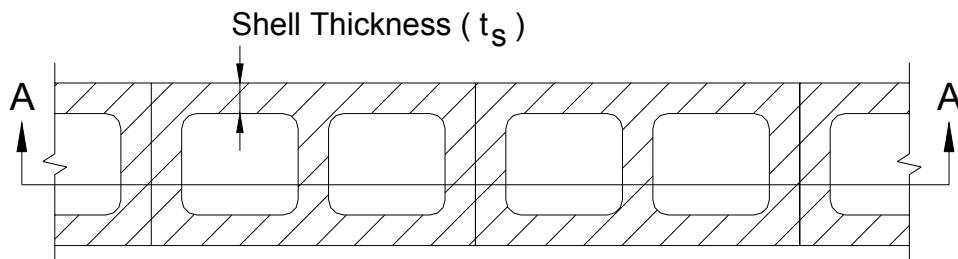

Percent Solid Through Web = $100 \times (\text{width of solid space through block along A-A}) / (\text{block width})$
(Note: Do not include any grout, this is accounted for separately in SBEDS input)

Figure 38. Percent Solid Through Web of CMU Cross Section

Table 16. Masonry Block Information Assumed In SBEDS

| Type | Density (pcf) | Percentage Solid Cross Section (%) | Percent Solid Through Webs (%) |
|--------------------------|------------------|---------------------------------------------|--------------------------------------|
| Brick | 120 | 100 | 100 |
| European Insulated Block | 60 – 120* | 50** | 50** |
| Heavy Weight CMU | 135 | See Table 17 | See Table 17 |
| Light Weight CMU | 95 | | |
| Medium Weight CMU | 120 | | |

* 87 pcf assumed in SBEDS calculations – use User Defined option if incorrect.
** An approximate, generally conservative value for blocks shown in Figure 39

Table 17. Assumed Cross Section Parameters for CMU Blocks

| Block Thickness (in) | Face Shell Thickness (in) | Web Thickness (in) | Percentage Solid Cross Section (%) | Percentage Solid Through Webs (%) |
|----------------------|---------------------------|--------------------|------------------------------------|-----------------------------------|
| 4 | 0.75 | 0.75 | 50 | 14 |
| 6 | 1.25 | 1.0 | 55 | 19 |
| 8 | 1.25 | 1.25 | 49 | 23 |
| 10 | 1.25 | 1.25 | 43 | 23 |
| 12 | 1.25 | 1.25 | 40 | 23 |

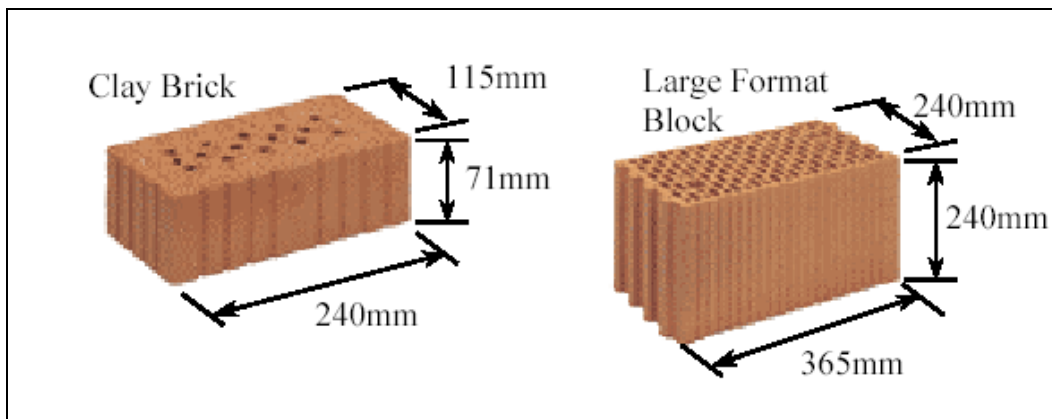


Figure 39. Small and Large European Insulated Blocks

Table 18. Recommended Conservative Values for Compressive Strength

| Type of Masonry Unit | Compressive Strength (f'm)* |
|------------------------|-----------------------------|
| UngROUTED CMU | 1350 psi |
| Fully Grouted CMU | 1500 psi |
| Brick or Solid Masonry | 1800 psi |

*Note: Values of 500 psi or less may be appropriate for old masonry walls (i.e., more than approximately than 50 yrs old). Also, modifications from original construction and structural discontinuities (e.g. bricked-up openings, large bearing plates and lintels, etc.) may affect strength.

$$R_{u_shear} = \frac{V_s K_d}{K_L L}$$

When Shear Flag = 2, $K_d = \frac{K_L L - d}{K_L L}$ When Shear Flag = 1, $K_d = 1$

Equation 25

- where:
- R_{u_shear} = Ultimate resistance of component based on shear capacity per unit loaded area
 - V_s = Shear capacity force per unit width based on masonry shear strength. This is equal to V_u in Equation 26 for the case of a double wythe wall.
 - $K_L L$ = Ratio K_L of span L causing maximum shear force at support based on boundary conditions (Note: $K_L=0.5$ for simply supported beam, $K_L=0.625$ for beam with simple-fixed supports, $K_L L$ conservatively equals the shortest distance from maximum deflection to support in yield line pattern – see Table 4-7 in TM5-1300 for more exact calculation of shear at distance d from supports of two way spanning components)
 - d = distance from blast loaded face to reinforcing steel on opposite face (see discussion in table above)
 - K_d = Factor applicable when shear is controlled at distance d from support, which generally occurs when supports on are opposite side of slab from blast load.

Note: $K_d=1.0$ when shear is controlled at the support.

$$V_i \propto \frac{C_v R_i}{L} \quad \text{therefore} \quad \frac{V_1}{V_2} = \frac{R_1}{R_2} = \frac{K_1}{K_2} = \frac{E_1 I_1}{E_2 I_2} *$$

$$\frac{V_1}{V_2} = \frac{v_1 A_1}{v_2 A_2} \quad \text{let} \quad v_r = \frac{v_1}{v_2} = \frac{A_2 R_1}{A_1 R_2} = \frac{A_2 K_1}{A_1 K_2} \quad \text{and} \quad v_{yr} = \frac{v_{y1}}{v_{y2}}$$

If $\frac{v_r}{v_{ry}} \geq 1$, then Wall 1 yields first and $V_u = V_{1u} + V_2 = V_{1u} \left(1 + \frac{E_2 I_2}{E_1 I_1} \right)$

Else, Wall 2 yields first and $V_u = V_{2u} + V_1 = V_{2u} \left(1 + \frac{E_1 I_1}{E_2 I_2} \right)$

*See first line of Equation 24


Equation 26

- where:
- i = 1 for inner wall and 2 for outer wall
 - V_i = shear force on of i^{th} wall per unit width
 - V_{iu} = ultimate resisting shear force of i^{th} wall
 - V_u = ultimate resisting shear force of two wall system
 - R_i = ultimate flexural resistance of walls
 - K_i = flexural stiffness of walls
 - A_i = shear area of i^{th} wall per unit width
 - L = equal spans of both walls
 - v_i = maximum shear stress in i^{th} wall
 - v_{yi} = yield shear stress of i^{th} wall
 - C_v = shear force constants dependent on boundary conditions, which are the same for each wall

Wood Beam-Column Component Input Information

| Item | Explanation |
|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response Mode | <ul style="list-style-type: none"> Only flexural response is considered for wood components with a number of available boundary and load conditions. Load-mass, stiffness, and ultimate resistance values are based on Chapter 3 of TM 5-1300. |
| Wood Density | <ul style="list-style-type: none"> Wood density ranges based on wood type from 25 to 60 lb/ft³. The AISC Manual of Steel Construction has a wide range of values in Part 6 under Miscellaneous Data. |
| Wood Species and Grade | <ul style="list-style-type: none"> A wood species and grade can be selected and SBEDS will use properties from the National Design Specification® (NDS) for Wood Construction Supplement: Design Values for Wood Construction, 2005 Edition in Table 19. The user can also choose the User Defined option and directly enter wood properties. |
| Modulus of Elasticity, E | <ul style="list-style-type: none"> Wood modulus of elasticity generally ranges from 1x10⁶ psi to 2x10⁶ psi. SBEDS will use a value from Table 19 for a user designated wood species and grade. |
| Dynamic Yield Strength in flexure, f_{dy} | <ul style="list-style-type: none"> Input the ultimate dynamic rupture strength for wood in flexure. Typically, there is at least a 2.5 safety factor on allowable static strengths and a dynamic increase factor of 2.0 for very short term loading. Therefore, allowable static wood flexural strengths can be increased by at least a factor of 5.0. SBEDS will calculate a dynamic flexural strength equal to five times the allowable strength in Table 19 for a user designated wood species and grade. |
| Loaded Area Factor, A_F | <ul style="list-style-type: none"> Ratio of [blast loaded area on component] to [component spacing*span]. $A_F = 1$ for any uniformly distributed blast load, $A_F \leq 1$ for concentrated loads where attached components transfer load from area that does not include full span. See Figure 40 for example case where $A_F = 0.5$. Stiffness and resistance values are based on a blast loaded area = A_F BL. Mass calculations unaffected by A_F since supported mass per unit loaded area is input directly and the self-weight mass is independent of A_F. |
| Moment Capacity | <ul style="list-style-type: none"> The moment capacity for flexural response is $S(f_{dy} + P_T/A)$, where S=elastic section modulus, A=cross sectional area, and f_{dy} are input values. P_T includes the input static axial load and the peak dynamic axial load. |
| Static Axial Load for Compression and P-delta Loading, P (Only for Beam-Columns) | <p>User should input static axial load P on beam/column causing compression and P-delta moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on $(P/B+P_{DYN})(\text{deflection at each time step})$ assuming no resisting moment at the supports, at each time step in SDOF calculations. B is the beam-column spacing and P_{DYN} is explained in the next row. w_{equiv} is calculated as shown in Equation 27 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is an approximate approach, especially for two-way spans and one-way spans with fixed boundary conditions.</p> <p>Note: See Table 7 for comparison of equivalent lateral load method in SBEDS to theory where elastic, essentially static lateral load was input in SBEDS with axial load.</p> |

| | |
|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Dynamic Axial Load for Compression and P-delta Loading, P_{DYN}</p> <p>(Only for Beam-Columns)</p> | <ul style="list-style-type: none"> • <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. • <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with a dynamic reaction load from a supported roof or overhead component. This file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. Usually this input file is generated by SBEDS as described in note below. The last line of input file has -999 followed by a comma and the span length, L_s (inch or mm) of the supported component that applies the dynamic reaction pressure (Equation 28). SBEDS determines P_{DYN} as shown in Equation 28 and uses it to determine an equivalent P-delta load as shown in Equation 27. See Appendix A for an example of an input dynamic axial load input file. See Section 4.4. in the SBEDS Methodology Manual for more discussion. <p>Note: The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file into SBEDS as a dynamic axial load input file on a supporting component.</p> |
| <p>Loaded Width for Dynamic Axial Load, B_a</p> | <ul style="list-style-type: none"> • Only applicable for cases with input dynamic axial load • Input width along top of component subject to dynamic axial load per unit width (see Equation 27). |
| <p>Equivalent Static Reactions</p> | <ul style="list-style-type: none"> • Equivalent static reactions on the <i>Input</i> sheet are based on Table 3-9 in TM 5-1300 using the ultimate flexural resistance. These reactions can be treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors on the <i>Input</i> sheet are shown on the <i>Results</i> sheet. • The shear strength of wood is almost always controlled by the connections and is outside the scope of SBEDS. |
| <p>All Other Items</p> | <p>Return to top of document and link to Help on General Input and Output Items Including Blast Load</p> |

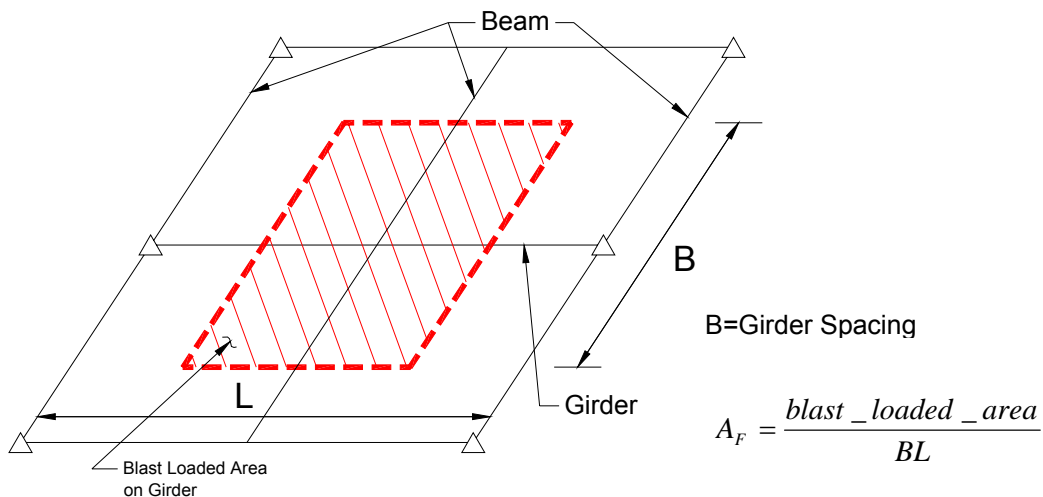

Note that beams only transfer blast load from 50% of the area $B*L$ into girder in this example where the beams have a pinned connection to girders. The blast load from the rest of this area is transferred by beams directly into columns supporting girder.

Figure 40. Example of Girder with Loaded Area Factor (A_F) of 0.5

$$w_{equiv} = W_F \left(\frac{P}{B_L} + P_{DYN}(t) \frac{B_a}{B_L} \right) \Delta(t)$$

$$W_F = \frac{K}{L^2} C$$

Equation 27

- where:
- $w_{equiv}(t)$ = equivalent lateral load with same spatial distribution as blast load causing P-delta moments in component (added to applied blast load)
 - W_F = equivalent P-delta load factor
 - K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
= 4 for component supported top and bottom with concentrated midspan load
= 2 for uniform load component supported at bottom of axially loaded span
 - C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 $C = 0.64$ for all two-way spans (this is conservative in some cases)
 $C = 1.0$ for all one-way spans
 - L = span length (in direction of axial load for 2-way spanning components)
 - P = total static axial load applied beam/column
 - $P_{DYN}(t)$ = dynamic axial load per unit width from supported component (usually the dynamic reaction force from a supported component along its support). See Equation 28.
 - $\Delta(t)$ = displacement of SDOF system at each time step
 - B_a = loaded width of analyzed component subject to dynamic axial load
 - B_L = blast loaded width of analyzed component

$$P_{DYN}(t) = V(t)L_s$$

Equation 28

- where:
- P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
 - $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers) as explained in Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
 - L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
(Example: $L_s = 60$ in for a 10 ft simply supported or fixed-simple beam.)

$L_s = 120$ in for axial load 20 ft high wall slab)


Table 19. NDS Wood Properties

| Species | Allowable Flexural Strength (psi) | | | | | | | | Modulus of Elasticity (psi) | | | | | | | |
|----------------------------|-----------------------------------|-------|-------|-------|------|---------------|-----------|---------|-----------------------------|---------|---------|---------|---------|---------------|-----------|---------|
| | Select Structural | No. 1 | No. 2 | No. 3 | Stud | Con-struction | Stan-dard | Utility | Select Structural | No. 1 | No. 2 | No. 3 | Stud | Con-struction | Stan-dard | Utility |
| ALASKA CEDAR | 1,150 | 975 | 800 | 450 | 625 | 900 | 500 | 250 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 |
| ALASKA HEMLOCK | 1,300 | 900 | 825 | 475 | 650 | 950 | 525 | 250 | 1.7E+06 | 1.6E+06 | 1.5E+06 | 1.4E+06 | 1.4E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 |
| ALASKA SPRUCE | 1,400 | 950 | 875 | 500 | 675 | 1,000 | 550 | 275 | 1.6E+06 | 1.5E+06 | 1.4E+06 | 1.3E+06 | 1.3E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 |
| ALASKA YELLOW CEDAR | 1,350 | 900 | 800 | 475 | 625 | 925 | 500 | 250 | 1.5E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.2E+06 | 1.3E+06 | 1.1E+06 | 1.1E+06 |
| ASPEN | 875 | 625 | 600 | 350 | 475 | 700 | 375 | 175 | 1.1E+06 | 1.1E+06 | 1.0E+06 | 9.0E+05 | 9.0E+05 | 9.0E+05 | 9.0E+05 | 8.0E+05 |
| BALD CYPRESS | 1,200 | 1,000 | 825 | 475 | 650 | 925 | 525 | 250 | 1.4E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.2E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 |
| BEECH-BIRCH-HICKORY | 1,450 | 1,050 | 1,000 | 575 | 775 | 1,150 | 650 | 300 | 1.7E+06 | 1.6E+06 | 1.5E+06 | 1.3E+06 | 1.3E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 |
| COAST SITKA SPRUCE | 1300 | 925 | 925 | 525 | 725 | 1050 | 600 | 275 | 1.7E+06 | 1.5E+06 | 1.5E+06 | 1.4E+06 | 1.4E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 |
| COTTONWOOD | 875 | 625 | 625 | 350 | 475 | 700 | 400 | 175 | 1.2E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 | 1.0E+06 | 1.0E+06 | 9.0E+05 | 9.0E+05 |
| DOUGLAS FIR-LARCH | 1,500 | 1,000 | 900 | 525 | 700 | 1,000 | 575 | 275 | 1.9E+06 | 1.7E+06 | 1.6E+06 | 1.4E+06 | 1.4E+06 | 1.5E+06 | 1.4E+06 | 1.3E+06 |
| DOUGLAS FIR-LARCH (NORTH) | 1,350 | 850 | 850 | 475 | 650 | 950 | 525 | 250 | 1.9E+06 | 1.6E+06 | 1.6E+06 | 1.4E+06 | 1.4E+06 | 1.5E+06 | 1.4E+06 | 1.3E+06 |
| DOUGLAS FIR-SOUTH | 1,350 | 925 | 850 | 500 | 675 | 975 | 550 | 250 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 |
| EASTERN HEMLOCK-BALSAM FIR | 1,250 | 775 | 575 | 350 | 450 | 675 | 375 | 175 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 9.0E+05 | 9.0E+05 | 1.0E+06 | 9.0E+05 | 8.0E+05 |
| EASTERN HEMLOCK-TAMARACK | 1,250 | 775 | 575 | 350 | 450 | 675 | 375 | 175 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 9.0E+05 | 9.0E+05 | 1.0E+06 | 9.0E+05 | 8.0E+05 |
| EASTERN SOFTWOODS | 1,250 | 775 | 575 | 350 | 450 | 675 | 375 | 175 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 9.0E+05 | 9.0E+05 | 1.0E+06 | 9.0E+05 | 8.0E+05 |
| EASTERN WHITE PINE | 1,250 | 775 | 575 | 350 | 450 | 675 | 375 | 175 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 9.0E+05 | 9.0E+05 | 1.0E+06 | 9.0E+05 | 8.0E+05 |
| HEM-FIR | 1,400 | 975 | 850 | 500 | 675 | 975 | 550 | 250 | 1.6E+06 | 1.5E+06 | 1.3E+06 | 1.2E+06 | 1.2E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 |
| HEM-FIR (NORTH) | 1,300 | 1,000 | 1,000 | 575 | 775 | 1,150 | 650 | 300 | 1.7E+06 | 1.6E+06 | 1.6E+06 | 1.4E+06 | 1.4E+06 | 1.5E+06 | 1.4E+06 | 1.3E+06 |
| MIXED MAPLE | 1,000 | 725 | 700 | 400 | 550 | 800 | 450 | 225 | 1.3E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 | 1.0E+06 | 1.1E+06 | 1.0E+06 | 9.0E+05 |
| MIXED OAK | 1,150 | 825 | 800 | 475 | 625 | 925 | 525 | 250 | 1.1E+06 | 1.0E+06 | 9.0E+05 | 8.0E+05 | 8.0E+05 | 9.0E+05 | 8.0E+05 | 8.0E+05 |
| NORTHERN RED OAK | 1,400 | 1,000 | 975 | 550 | 750 | 1,100 | 625 | 300 | 1.4E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.2E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 |


| Species | Allowable Flexural Strength (psi) | | | | | | | | Modulus of Elasticity (psi) | | | | | | | |
|-------------------------|-----------------------------------|-------|-------|-------|------|--------------|----------|---------|-----------------------------|---------|---------|---------|---------|--------------|----------|---------|
| | Select Structural | No. 1 | No. 2 | No. 3 | Stud | Construction | Standard | Utility | Select Structural | No. 1 | No. 2 | No. 3 | Stud | Construction | Standard | Utility |
| NORTHERN SPECIES | 975 | 625 | 625 | 350 | 475 | 700 | 400 | 175 | 1.1E+06 | 1.1E+06 | 1.1E+06 | 1.0E+06 | 1.0E+06 | 1.0E+06 | 9.0E+05 | 900,000 |
| NORTHERN WHITE CEDAR | 775 | 575 | 550 | 325 | 425 | 625 | 350 | 175 | 8.0E+05 | 7.0E+05 | 7.0E+05 | 6.0E+05 | 6.0E+05 | 7.0E+05 | 6.0E+05 | 6.0E+05 |
| RED MAPLE | 1,300 | 925 | 900 | 525 | 700 | 1,050 | 575 | 275 | 1.7E+06 | 1.6E+06 | 1.5E+06 | 1.3E+06 | 1.3E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 |
| RED OAK | 1,150 | 825 | 800 | 475 | 625 | 925 | 525 | 250 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 | 1.1E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 |
| REDWOOD | 1,350 | 975 | 925 | 525 | 575 | 825 | 450 | 225 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 | 9.0E+05 | 9.0E+05 | 9.0E+05 | 8.0E+05 |
| SOUTHERN PINE | 2,850 | 1,850 | 1,500 | 850 | 850 | 1,100 | 625 | 300 | 1.8E+06 | 1.7E+06 | 1.6E+06 | 1.4E+06 | 1.4E+06 | 1.5E+06 | 1.3E+06 | 1.3E+06 |
| SOUTHERN PINE (MIXED) | 2,050 | 1,450 | 1,300 | 750 | 750 | 1,000 | 550 | 275 | 1.6E+06 | 1.5E+06 | 1.4E+06 | 1.2E+06 | 1.2E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 |
| SPRUCE-PINE-FIR | 1,250 | 875 | 875 | 500 | 675 | 1,000 | 550 | 275 | 1.5E+06 | 1.4E+06 | 1.4E+06 | 1.2E+06 | 1.2E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 |
| SPRUCE-PINE-FIR (SOUTH) | 1,300 | 875 | 775 | 450 | 600 | 875 | 500 | 225 | 1.3E+06 | 1.2E+06 | 1.1E+06 | 1.0E+06 | 1.0E+06 | 1.0E+06 | 9.0E+05 | 9.0E+05 |
| WESTERN CEDARS | 1,000 | 725 | 700 | 400 | 550 | 800 | 450 | 225 | 1.1E+06 | 1.0E+06 | 1.0E+06 | 9.0E+05 | 9.0E+05 | 9.0E+05 | 8.0E+05 | 8.0E+05 |
| WESTERN WOODS | 900 | 675 | 675 | 375 | 525 | 775 | 425 | 200 | 1.2E+06 | 1.1E+06 | 1.0E+06 | 9.0E+05 | 9.0E+05 | 1.0E+06 | 9.0E+05 | 8.0E+05 |
| WHITE OAK | 1,200 | 875 | 850 | 475 | 650 | 950 | 525 | 250 | 1.1E+06 | 1.0E+06 | 9.0E+05 | 8.0E+05 | 8.0E+05 | 9.0E+05 | 8.0E+05 | 8.0E+05 |
| YELLOW CEDAR | 1200 | 800 | 800 | 475 | 625 | 925 | 525 | 250 | 1.6E+06 | 1.4E+06 | 1.4E+06 | 1.2E+06 | 1.2E+06 | 1.3E+06 | 1.2E+06 | 1.1E+06 |
| YELLOW POPLAR | 1,000 | 725 | 700 | 400 | 550 | 800 | 450 | 200 | 1.5E+06 | 1.4E+06 | 1.3E+06 | 1.2E+06 | 1.2E+06 | 1.3E+06 | 1.1E+06 | 1.1E+06 |

Wood Panel Component Input Information

| Item | Explanation |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response Mode | <ul style="list-style-type: none"> Only flexural response is considered for wood components with numerous available boundary and load conditions. Flexural response is based on yielding at the maximum moment regions with resistance-deflection curves as shown in Figure 6. Load-mass, stiffness, and ultimate flexural resistance values for all one-way and two-way components are based on Chapter 3 in TM 5-1300, except as stated below. The elastic resistances for two-way components with fixed supports are based on Table 10-5 in UFC 3-340-01. For components with adjacent fixed supports, the elastic resistance is from only the negative moment capacity acting on the yield line pattern corresponding to the ultimate resistance. All ultimate resistances for two-way spanning components are calculated based on TM 5-1300 with a 1.08 increase factor to account for conservative approach in TM 5-1300 where only 2/3 maximum moment capacity is assumed in corners. |
| Wood Density | <ul style="list-style-type: none"> Wood density ranges from 25 to 60 lb/ft³. The AISC Manual of Steel Construction has a range of values in Part 6 under Miscellaneous Data. |
| Modulus of Elasticity, E | <ul style="list-style-type: none"> Wood modulus of elasticity generally ranges from 1x10⁶ psi to 2x10⁶ psi. |
| Dynamic Yield Strength in flexure, f _y | <ul style="list-style-type: none"> Input the ultimate dynamic rupture strength for wood in flexure. Typically, there is at least a 2.5 safety factor on allowable static strengths and a dynamic increase factor of 2.0 for very short term loading. Therefore, allowable static wood flexural strengths can be increased by at least a factor of 5.0. The moment capacity is based on S*f_y, where S=section modulus. |
| Equivalent Static Reactions | <ul style="list-style-type: none"> Equivalent static reactions on the <i>Input</i> sheet are based on Table 3-9 in TM 5-1300 using the ultimate flexural resistance. These reactions can be treated as equivalent static shear loads and compared to shear strength values. Dynamic reactions based on Dynamic Shear Factors on the <i>Input</i> sheet are shown on the <i>Results</i> sheet. The shear strength of wood is almost always controlled by the connections and is outside the scope of SBEDS. |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

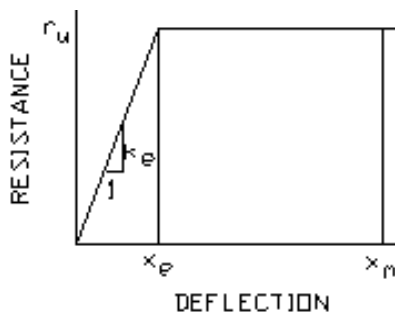

Determinate Boundary Conditions

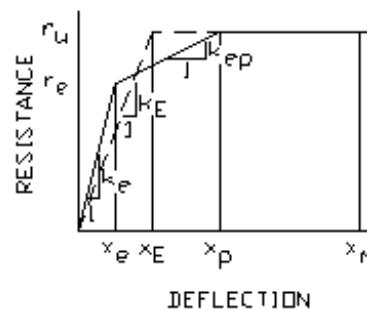

Indeterminate Boundary Conditions


(Solid Curve Used for Flexure Only)
(Dashed Curve is used to calculate ductility ratio)

Figure 41. Resistance-Deflection Curve For Flexural Response

General SDOF Analysis Input Information


| Item | Explanation |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Caution | <p>This form has very general SDOF input, requiring more user care than input for typical SDOF spreadsheets and computer programs that do not have all the available options on this form. Please read the following information carefully. Most typically, all rebound values are equal to inbound values with a negative sign, except stiffness and load-mass factors have the same sign. Error Messages will provide help if an error is detected on the input. Check the Error Messages both before and after Running SDOF. See the <i>General Input and Output Items</i> at the beginning of this document for help on general input items not specifically addressed in this table.</p> |
| Initial Displacement | <p>Input the initial displacement not caused by static conditions (i.e. when a spring is pulled and then let suddenly released). <u>This is rarely applicable in practical blast design problems.</u> This displacement is in addition to any displacement due to gravity effects. Note: All initial displacement is assumed to cause elastic response. The sum of the input initial displacement and any initial displacement from gravity effects should not cause any yielding.</p> |
| Mass | <p>Input the total mass of the component and all supported mass that deflects with the component during dynamic response in the units shown. Note: Mass must be > 0.</p> |
| Load-Mass Factors | <p>Input the applicable Load-Mass factor for each response range 1 to 5 of the resistance-deflection relationship, as illustrated in Figure 42. Different values can be input for inbound and rebound response, although typically they will be equal. See UFC 3-340-01, Chapter 11.5 for information on calculating load-mass factors and typical values. Note: All inbound and rebound load-mass factors must be > 0.</p> |
| Stiffnesses | <p>Input the applicable stiffness for each response range 1 to 5 of the resistance-deflection relationship, as illustrated in Figure 42, in the units shown. See UFC 3-340-01, Chapter 10 for information on calculating stiffnesses for typical components. Different values can be input for inbound and rebound response, although typically they will be equal. Note 1: Stiffnesses can be less than, equal, or greater than 0. Note 2: When $K_i > K_{1_rb}$ for $i > 1$, the SDOF analysis may not correctly calculate rebound and calculations are always stopped at the maximum deflection. If rebound is critical, another methodology should be used to calculate response.</p> |
| Rebound Flag | <p>See to Table 20 for additional information. Rebound flag = 1 for the typical case of no special rules regarding stiffness during rebound that are only applicable for components with compression membrane or brittle flexural cracking indicated by negative input stiffness values.</p> |
| Resistances | <p>Input the applicable resistance for each response range 1 to 5 of the resistance-deflection relationship, as illustrated in Figure 42, in the units shown. Different values can be input for inbound and rebound response. See UFC 3-340-01, Chapter 10 for information on calculating resistances for typical components. Note: Input inbound resistances with $R_i \geq 0$ and input all input rebound resistances with $R_{i_reb} \leq 0$.</p> |
| Yield Displacements | <p>Typically, SBEDS determines yield displacements from input stiffness and resistance information. However, when $K_i = 0$ for a response range that is not part of a perfectly plastic response (i.e., when $K_j > 0$ for $j > i$), the user must input the displacement at the end of the i^{th} response range, in the units shown. For example, the user must input x_4 for inbound and x_{4_reb} for rebound in Figure 42. See the last row in "Error Messages" for any required yield displacement input. Note: Any input inbound yield displacement $x_i \geq 0$ and any input rebound yield displacements $x_{i_reb} \leq 0$.</p> |

| Item | Explanation |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equivalent Elastic Yield (x_e and x_{e_reb}) | Input the equivalent elastic yield for full flexural yielding during inbound and rebound response, in the units shown (see Figure 43). An equivalent elastic stiffness can be input for indeterminate components. These values are used to calculate the worst case ductility ratio for inbound or rebound response. Note: $x_e > 0$ and $x_{e_reb} < 0$ are required input |
| Shortest Yield Line Distance to Determine θ | Input the distance to be used with the maximum inbound or rebound deflection to calculate the support rotation (θ), in the units shown. For one-way spanning members, this is typically one-half the span length. |
| Static Axial Load, P' (Only for P-delta effects on load bearing components) | Input static axial load per unit width loaded by blast, P' , causing P-delta moment as component deflects laterally under blast load. An equivalent lateral load (w_{equiv}) is used by SBEDS to apply a midspan moment based on $(P' + P_{DYN}) \cdot (\text{deflection at each time step})$ assuming no resisting moment at the supports, at each time step in SDOF calculations. P_{DYN} is explained in the next row. w_{equiv} is calculated as shown in Equation 29 and added to applied load at the next time step. It is plotted on the <i>Results</i> sheet. This approach does not account for P-delta moment caused by any sway deflection of the top support of the component relative to the bottom. Also, it is an approximate approach, especially for two-way spans and one-way spans with fixed boundary conditions. <u>Do not include static axial load from roof if dynamic axial load is also input.</u> Note: See Table 7 for comparison of equivalent lateral load method in SBEDS to theory where elastic, essentially static lateral load was input in SBEDS with axial load. |
| Dynamic Axial Load, P_{DYN} (Only for P-delta effects on load bearing components) | <ul style="list-style-type: none"> • <u>No dynamic axial load</u> is the default. In this case, there is no dynamic axial load on the component. There can still be an input static axial load. • <u>Dynamic axial load per unit width</u> prompts the user to select an input text file with a dynamic reaction load from a supported roof or overhead component. The load is applied over the blast-loaded width of the analyzed component. The input text file can be modified for cases where the axially loaded width is not equal to the blast loaded width as discussed in Appendix A. The input file (see Note below) has an optional first line that has the number of time-dynamic reaction pressure pairs (N) followed by N lines with time (ms), dynamic reaction pressure (psi or KPa) pairs where time and pressure are separated by a comma. Usually this input file is generated by SBEDS as described in note below. The last line of input file has -999 followed by a comma and the tributary span length, L_s of the component that applies the dynamic reaction pressure (see Equation 30). SBEDS determines P_{DYN} as shown in Equation 30 and uses it to determine an equivalent P-delta load as shown in Equation. See Appendix A for an example of an input dynamic axial load input file. See Section 4.4 of SBEDS Methodology Manual for more discussion. Note: The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file into SBEDS as a dynamic axial load input file on a supporting component. |
| All Other Items | Return to top of document and link to Help on General Input and Output Items Including Blast Load |

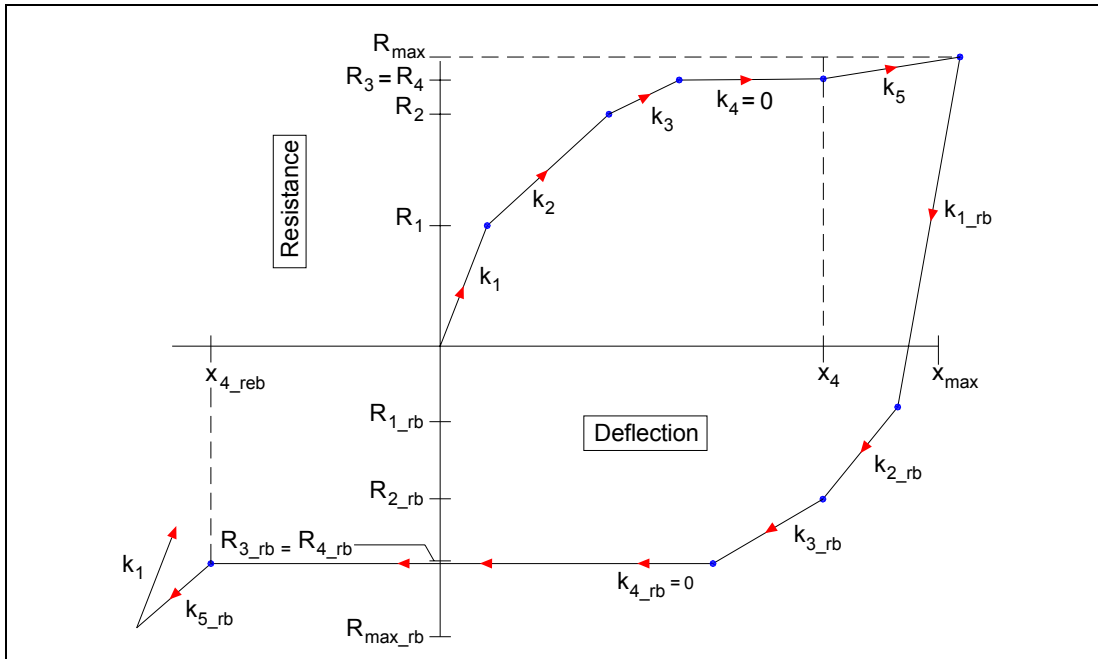


Note: See Table 1 and Table 2 and Figure 2 and Figure 3 under “General Input Items” for more information.

Figure 42. General Resistance-Deflection Diagram Without Softening

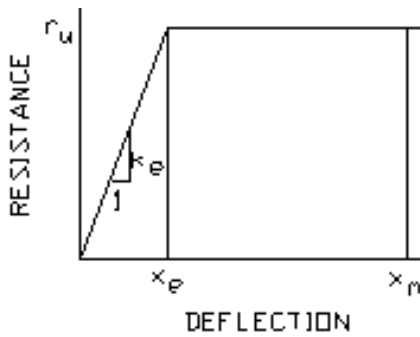

Determinate Boundary Conditions

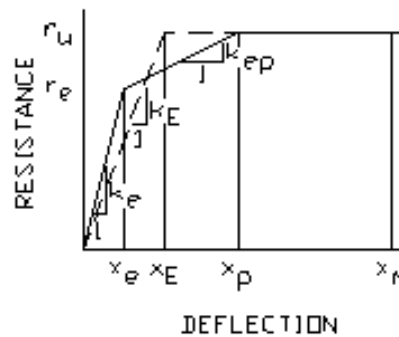

Indeterminate Boundary Conditions

(Solid Curve Used for Flexure Only)
(Dashed Curve for Flexure and Tension Membrane)

Figure 43. Resistance-Deflection Curve For Flexural Response

$$w_{equiv} = W_F \{P' + P_{DYN}(t)\} \Delta(t)$$
$$W_F = \frac{K}{L^2} C$$

Equation 29

- where:
- w_{equiv} = equivalent lateral load with same spatial distribution as blast load causing $P\Delta$ moments in component (added to applied blast load)
 - W_F = equivalent P-delta load factor
 - K = 8 for uniformly loaded component supported top and bottom over axially loaded span (including all 3 side supported component)
 - = 4 for component supported top and bottom with concentrated midspan load
 - = 2 for uniform load component supported at bottom of axially loaded span
 - C = load factor in direction perpendicular to axially loaded span accounting for component deflection distribution over axially loaded width
 - $C = 0.64$ for all two-way spans (this is conservative in some cases)
 - $C = 1.0$ for all one-way spans
 - L = span length (span in direction causing axial load for 2-way spanning components)
 - P' = total static axial load applied over blast loaded width of analyzed component divided by the blast loaded width
 - $P_{DYN}(t)$ = dynamic axial load per unit loaded width (usually the dynamic reaction force from a supported component loaded by blast)
 - $\Delta(t)$ = maximum component displacement at each time step

$$P_{DYN}(t) = V(t)L_s$$

Equation 30

- where:
- P_{DYN} = dynamic reaction load per unit width of component (lb/in or N/m)
 - $V(t)$ = dynamic reaction pressure multiplied by a factor of 2 (except when applied by cantilevers) as explained in Section 3.5 of the SBEDS Methodology Manual (psi or KPa)
 - L_s = one-half the span along the direction that applies P_{DYN} to the support except it equals full span when loading component is a cantilever (inches or mm). L_s is typically calculated and saved to file by SBEDS when dynamic reaction pressure output is saved.
(Example: $L_s = 60$ in for a 10 ft simply supported or fixed-simple beam.
 $L_s = 120$ in for axial load 20 ft high wall slab)
 - Note: L_s can be modified in the saved file for cases where P_{DYN} is applied over a width different from the blast loaded width – see Appendix A.

Table 20. Rebound Flag Information

| Rebound Flag | Rules Used by SBEDS for Rebound Response Based on Rebound Flag |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | No special rules. Input inbound and rebound stiffnesses and resistances are used as shown in Figure 2 to calculate response. |
| 0 | Rules for stiffness applicable for components with compression membrane response are used in SBEDS. These rules cause the negative value of the input rebound resistance values and the input rebound stiffness values to be used as the inbound resistance and stiffness inbound values after the first inbound cycle. The rebound stiffness and resistance should be selected to prevent compression membrane stiffness from occurring until the deflection is less than zero during rebound. See Figure 2 and Table 2 in the Help on General Input Items section near the top of this document for more information on how SBEDS creates resistance-deflection relationships for components with compression membrane. |
| -1 | Rules for stiffness applicable for unreinforced masonry components with arching from axial load are used in SBEDS. These rules for based on loss of all flexural stiffness and resistance after cracking (i.e., after first negative stiffness value in calculated response). See Figure 2 and Table 2 in the Help on General Input Items section near the top of this document for more information on how SBEDS creates resistance-deflection relationships for components with brittle flexural cracking. |

Pressure-Impulse (P-i) and Standoff-Charge Weight (R-W) Diagram Input Information

| Item | Explanation |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Creating a P-i Diagram | The user should go to the <i>P-i Diagram</i> sheet in the SBEDS workbook. SBEDS will create up to four Pressure-Impulse curves for the component on the <i>Input</i> sheet that show all blast loads in terms of positive phase peak pressure and impulse causing four input controlling deflections of the input component. These four curves are shown on one graph (i.e., P-i diagram) on the <i>P-i Diagram</i> sheet. Each curve is calculated based on the inputs discussed in this table by iterative running the SDOF analysis for the component on the <i>Input</i> sheet to determine blast loads with widely varying durations compared to the natural period of the input component that all cause this component to have the “controlling” deflection, as discussed below. |
| Creating R-W Diagrams | SBEDS will create up to four curves of combinations of equivalent TNT charge weight (W) and standoff distance (R) that cause each pressure-impulse point on P-i diagrams for four input controlling deflections of the input component. These four curves are shown on one graph (i.e., R-W diagram) on the <i>P-i Diagram</i> sheet in the SBEDS workbook. Each curve is calculated based on the inputs discussed in this table by iterative running the SDOF analysis to determine blast loads with widely varying durations compared to the natural period of the input component that all cause this component to have the “controlling” deflection, as discussed below. |
| Component Input | All P-i or R-W curves are calculated for the component defined on the <i>Input</i> sheet in the SBEDS workbook. The user should input all required values for the component of interest on the <i>Input</i> sheet and then go to the <i>P-i Diagram</i> sheet in the SBEDS workbook. It is not necessary to RUN SDOF for the input component first, but this will allow to user to verify that SBEDS does not see any errors in the component input, which would be promulgated into any P-i or R-W diagram calculations. |
| Input Criteria for P-i or R-W Curves | <ul style="list-style-type: none"> • Input ductility ratios defining each of up to four P-i or R-W curves. These ductility ratios will be multiplied by the Equivalent Elastic Displacement (x_E) on the <i>Input</i> sheet to determine the Controlling Deflections based on ductility ratio. • Input support rotations (θ) defining each of the four P-i or R-W curves. The Controlling Deflections based on support rotations are calculated using the definition for θ in Figure 44 and the Shortest Yield Line Distance for Determining θ in the Results Section on the <i>Input</i> sheet. This distance equals half the span for a simply supported beam and it is based on the yield line pattern for two-way spanning components. • The lower of the Controlling Deflections based on support rotations or ductility ratio are the controlling maximum dynamic deflections used to create the P-i or R-W curves and are shown in the table. • Either a ductility ratio, a support rotation, or both values must be input in a row of the table for each P-i or R-W curve that will be generated beginning with the first row. At least the first row must have an input ductility ratio or support rotation. |
| Analysis Type | <ul style="list-style-type: none"> • Select the appropriate option to generate a P-i diagram or R-W diagram. • An R-W diagram can be generated for either side-on or fully reflected blast loading. Effects such as clearing or angle of incidence of reflected blast loads are not considered. The user can input a maximum charge weight to be displayed on the R-W diagrams after selecting one of the R-W analysis types on the drop-down menu. • If an R-W diagram option is selected, SBEDS will create an optional |

| Item | Explanation |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | input cell in F17 on the P-i diagram sheet for the maximum charge weight of interest to include in the R-W plot. The default value is 500000 lb or 250000 kg. The R-W diagram will plot more quickly if a lower charge weight is entered in cell F17. A larger charge weight can also be entered. |
| Load Type for Response Diagram | <ul style="list-style-type: none"> • Select the appropriate load type option to either include or ignore the negative phase of blast loads used to generate the P-i diagram or R-W diagram. The negative phase blast load tends to increase the amount of positive phase blast load and decrease the scaled standoff (i.e., $R/W^{0.33}$) required to cause the controlling deflections for cases where component response time to peak deflection is less than the total blast load duration, which is typical of high explosive loads. • <u>Positive phase load only</u> causes the P-i diagram to be calculated using a right triangular shaped blast load, where the blast load is calculated solely from peak pressure and blast load duration combinations. This option causes a R-W diagram to be calculated with only positive phase blast load that decays exponentially from peak pressure to zero pressure. • <u>Include negative phase</u> causes the P-i diagram or R-W diagram to be calculated using blast loads calculated from charge weight-standoff combinations that have an exponential decay shape in the positive phase and a non-linear shape for the negative phase as shown in Figure 4. See first bullet below under Error Messages for one exception. |
| Time step | The P-i and R-W diagrams are calculated with iterative SDOF analyses that initially use the smaller of the input or recommended time step on the Input Worksheet. The time step is increased if necessary to calculate response out to the time of maximum deflection. If the resistance vs. deflection diagram for the input component (see plot to the right on the Input Worksheet) has sharp change in slope, such as from positive to negative slope, it may be necessary to input a smaller time step than the recommended value. For these cases, it is recommended that the user check several of the points on the P-i or R-W diagram by running the blast load defined by the point as a SDOF analysis on the Input Worksheet. |
| Save Plotted Data to DPLOT File | This option saves the positive phase peak pressure and impulse values causing each point on each P-i or the charge weight and standoff for each point on a R-W curve to a user-named file that can be read with the DPLOT computer program. Use Option A in the DPLOT program file read menu to read the saved file. |
| Error Messages | <ul style="list-style-type: none"> • R-W diagrams will be stopped if the scaled standoff, Z, is $> 100 \text{ ft/lb}^{1/3}$. The methods used to calculate charge weight-standoff blast loads in SBEDS are not accurate at higher Z. <i>However</i>, P-i diagram calculations will continue, where the blast load is calculated solely from peak pressure and duration combinations with a right triangular shape. In most cases the effect of the negative phase load is minimal at $Z > 100 \text{ ft/lb}^{1/3}$ and no “kink” will occur in the P-i diagram due to change in blast load calculations. • The user is cautioned when “Large Time Step/Load Duration” occurs in P-i or R-W diagram calculations. This means that the time step used to calculate the controlling deflection is more than 10% of the equivalent triangular positive load duration for a given point on a given P-i or R-W diagram. This is not always a problem, but it may explain why some points do not fit in a smooth pattern with other calculated points. This |

| Item | Explanation |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>usually occurs because the larger time step is needed to calculate response out to the maximum deflection in the SDOF calculations used to determine the P-i or R-W diagram. See Cell R69 on the P-i Diagram sheet for more detailed information on the points with Large Time Step/Load Duration.</p> <ul style="list-style-type: none"> <li data-bbox="488 401 1388 701">• The user is cautioned when “Peak Deflection not Attained for some points in P-i or R-W diagram calculations”. This means that there were not sufficient time steps to reach the controlling deflection in the SDOF calculations used to determine a given point on a given P-i or R-W diagram. This is not always a problem since the deflection vs. time curve is often relatively flat near the peak deflection and the calculated deflection may be very near the peak value. However, this caution may explain why some points do not fit in a smooth pattern with other calculated points. See Cell R69 on the P-i Diagram sheet for more detailed information on the points without calculated Peak Deflection. |

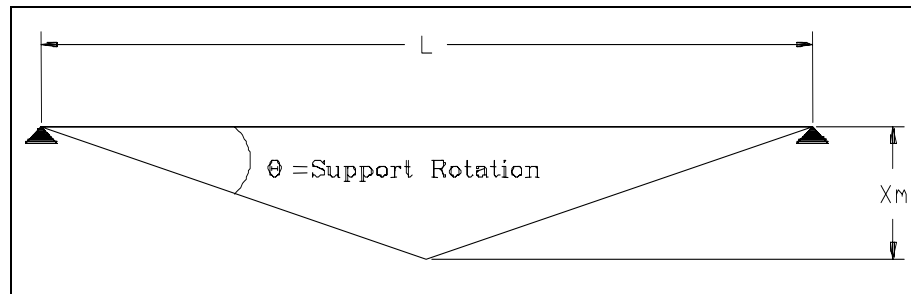


Figure 44. Support Rotation Angle

Appendix A

Input Files for Pressure-Time History or Dynamic Axial Load Read by SBEDS

Example of Input File for Pressure-Time History or Dynamic Axial Load

230 ‘Note: This is the total number of time, pressure pairs in file (it is optional)
0,0.88 ‘Note: This is the first time, pressure pair that is read into SBEDS
0.08,0.874659123628217
0.16,0.87269411842335
0.24,0.874072094055453
0.32,0.878756512908458
0.4,0.886707230076135
0.48,0.897880537293551
0.56,0.912229210755961
0.64,0.929702562772818
0.72,0.950246497200393
0.8,0.973803568592397
0.88,1.00031304500391
0.96,1.02971097438
1.04,1.06193025445634
1.12,1.09690070609563
1.2,1.13454914997946
1.28,1.1747994865719
1.36,1.21757277926751

continue with additional lines of time, pressure with time in units of ms and pressure in units of psi or KPa to match current units on Input sheet. Note that the pressures can be a blast load pressure or a dynamic shear pressure.

18.23,-7.55E-02
18.31,5.38E-02 ‘Note: this is line 230
-999,120 ‘Note: this final line has -999, L_s . It is only needed for a dynamic axial load file.

L_s (inches or mm) equals 120 for the example above. It is the span of the component area contributing to the dynamic reaction force P_{DYN} —see Equation 4 for more information on L_s . L_s is not used if file is read in as a pressure-time history.

See next page for more information.

Information on SBEDS Input Files for Pressure-Time History and Dynamic Axial Load

The user can create a pressure-history load or a dynamic axial load input file to be read into SBEDS in four ways.

- 1) The user can save a DPLOT file as an ASCII file that can be read in as a pressure-history load. The last line with $-999, L_s$ can be added to this file and it can be read in as a dynamic axial load input file.
- 2) The user can use the save file option on the SDOF Output sheet (NOT the save plot option) to save either the short span or long span dynamic reaction pressure history from the supported component and then read this saved file into SBEDS as a pressure-history load or a dynamic axial load input file on a supporting component. This saved file includes all the time, dynamic reaction pressure pairs and the last line with L_s . If it is read as a pressure-history load, the line with L_s is ignored by SBEDS. The saved dynamic reaction pressures are increased by a factor of 2 as described in Section 3.5 of the SBEDS Methodology Manual.
- 3) When a saved file is read into SBEDS as a dynamic axial load per unit width, SBEDS multiplies the dynamic shear pressures on each line of the saved file by L_s from the last line of the file to create dynamic axial loads per unit width that are used in SBEDS. This dynamic axial load only acts over a user input width of an analyzed beam-column type component. However, it is assumed to act over the same width as the blast load for all wall components. If this is not true for a wall component, the user can edit the saved file (before reading it into SBEDS as a dynamic axial load) by multiplying L_s by an appropriate factor that will cause the correct amount of dynamic axial load (i.e., multiply L_s by 0.5 if only one-half the blast-loaded width of the wall component is subject to the dynamic axial load) and resaving the file. Note that this is an approximate approach that is not validated with high fidelity dynamic analyses or test data.
- 4) The user can create an electronic file for use as a pressure-time history or dynamic axial load in SBEDS in the format shown in this appendix and save it as a text file. If it has a filename of the form *.dat, then SBEDS will automatically display the file if the user browses the applicable directory during the prompt from SBEDS to read an input file.

DISTRIBUTION STATEMENT A: Approved for Public Release;
Distribution is unlimited.